
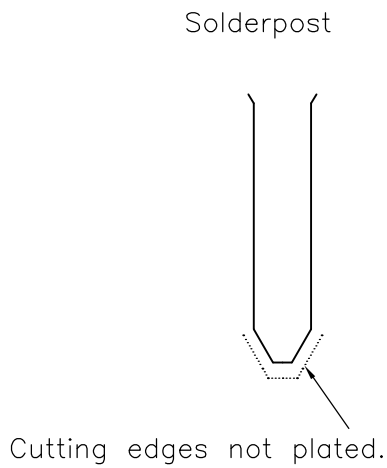


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	WO 00/7012	20-07-09	—	VS
			B	SR10-0250-02	24-05-02	—	BC
			B1	ECR-09-015706	24-11-09	AEG MKO	

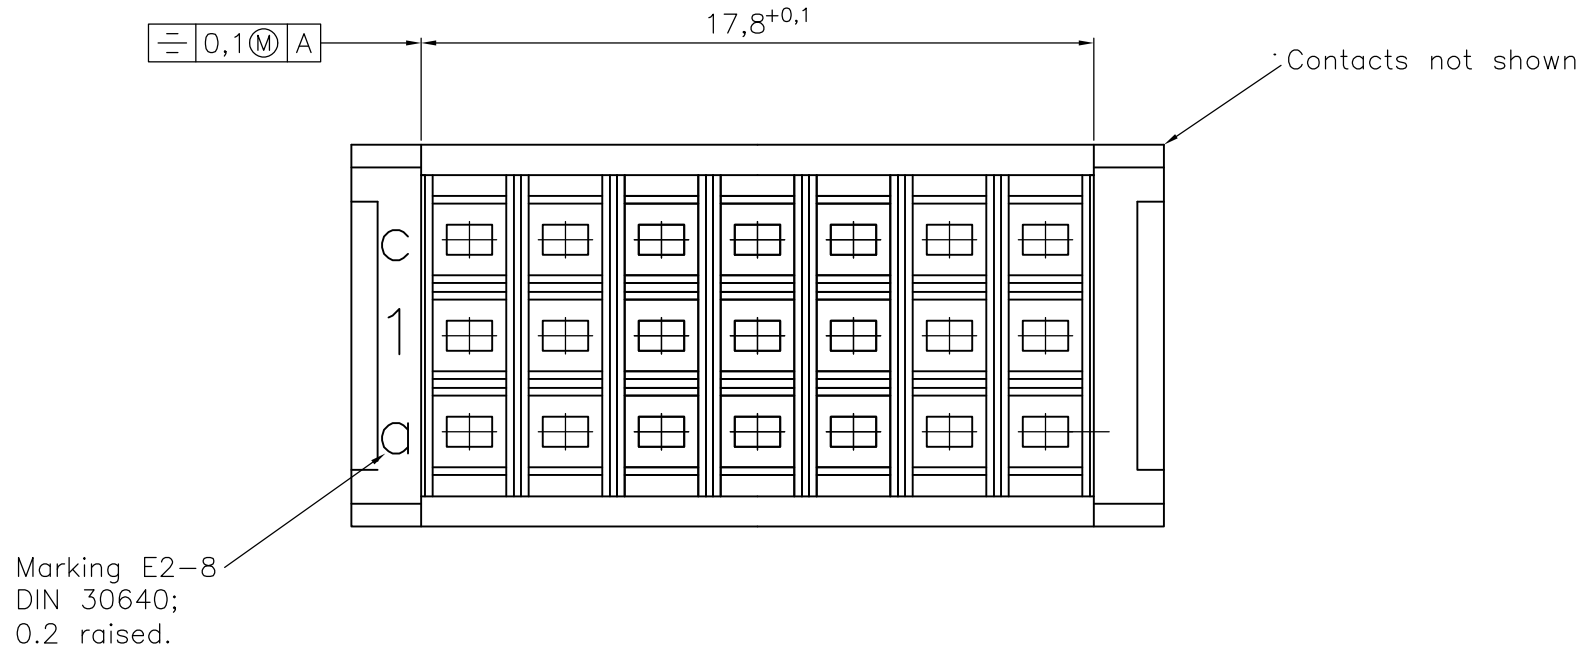

Loading Pattern (8 contacts)

	1	2	3	4	5	6	7
Row a	+	o	+	o	+	o	+
Row b	o	+	+	o	+	+	o
Row c	o	o	o	o	o	o	o

+ = contact
o = no contact

Specifications acc. IEC 603-2. Performance Level 2

Housing : PBTP 30% Glasfilled (UL94-V0)
Pebblegrey similar RAL 7032
Contact material : Copper Alloy
Plating : Contact area : PdNi+Au or Au
Termination area : Sn with flux-thight coating.

1) Center-displacement between termination- and contact-side.

Active Partnumber. Contact Tyco Electronics for other configuration availability

Old Partnumber	TE Part number
V42254-F2299-R5	1393657-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 10JUN98	Tyco Electronics Corporation 's-Hertogenbosch, Nederland			
DIMENSIONS: mm		CHK —				
		APVD PD COM	NAME Receptacle Ass'y, Type R, 21 pos.			
		PRODUCT SPEC —	V42254-F2299-R5-*—26			
MATERIAL —		APPLICATION SPEC —	SIZE A2	CAGE CODE 00779	DRAWING NO C=1393657-3	RESTRICTED TO —
		WEIGHT —	SCALE 5:1;10:1		SHEET 1 OF 1	REV B1
FINISH —		CUSTOMER DRAWING				