

Actuator

14-
041.006



<https://eao.com/p/14-041.006>

Your product:



14-041.006 Actuator

MOUNTING

Design: flush

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V AC/DC

MECHANICAL CHARACTERISTIC

Tightening torque: Fixing nut max. 0.25 Nm

Terminal: Universal terminal, 2 x 0.5 mm

Weight: 0.011 kg

AMBIENT CONDITION

Storage temperature: - 40 °C ... + 85 °C

IP front protection: IP67, according to DIN EN 60529

Operating temperature: - 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely

CERTIFICATE


Approbations: CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL

Conformities: CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)


OTHER

Short Description: Actuator, Universal terminal, 2 x 0.5 mm, IP67, according to DIN EN 60529


Dimension drawings:

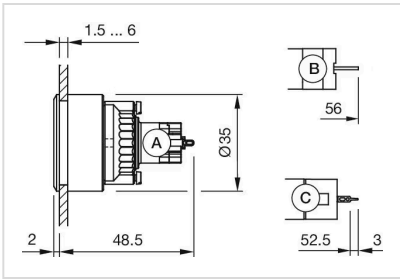

Mounting cut-outs:

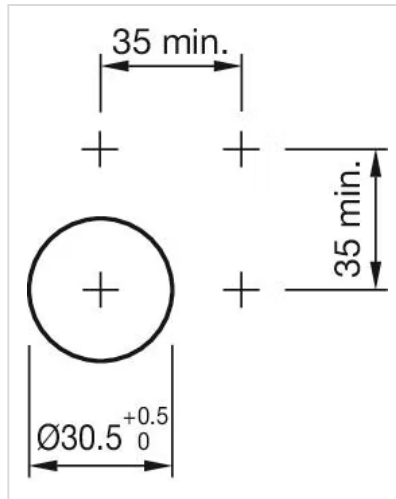

Wiring diagrams:

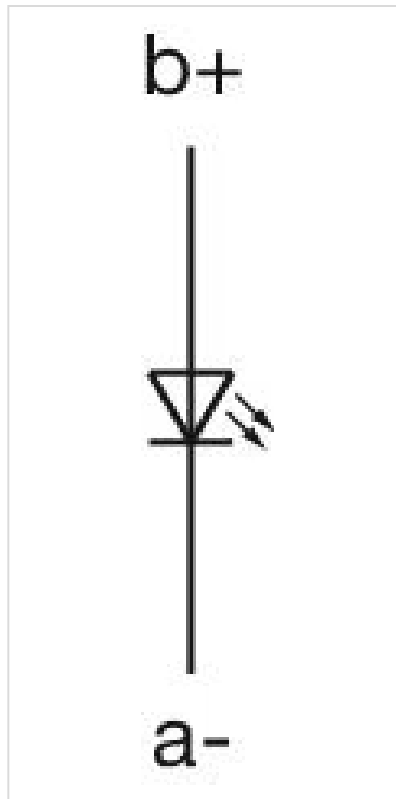

Component layouts:

