

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Network cable, PROFINET CAT5 (100 Mbps), Ethernet CAT5 (100 Mbps), 4-position, shielded, Plug straight M12 SPEEDCON / IP65, coding: D, on free cable end, cable length: 10 m, For railway applications

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Securely locked by special vibration brake
- Resistant to temperature influences – tested for an extended temperature range and for resistance to temperature shocks
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial Data

Item number	1407341
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1CJN
Product Key	BF1CJN
Catalog Page	Page 133 (C-4-2013)
GTIN	4046356774574
Weight per Piece (including packing)	650 g
Weight per Piece (excluding packing)	650 g
Customs tariff number	85444290
Country of origin	PL

Technical Data

Notes

General	Further products with variable cable type and variable cable length can be found in the accessories section
---------	---

Product properties

Product type	Data cable preassembled
Number of positions	4
Application	Railway applications
No. of cable outlets	1
Shielded	yes
Coding	D - data

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Interfaces

Bus system	PROFINET
	Ethernet
Signal type/category	PROFINET CAT5 (IEC 11801), 100 Mbps
	Ethernet CAT5 (IEC 11801), 100 Mbps
	PROFINET CAT5 (IEC 11801), 100 Mbps
	Ethernet CAT5 (IEC 11801), 100 Mbps

LED signaling

Status display	No
Status display present	No

Electrical properties

Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A
Transmission medium	Copper

Material specifications

Color Handle area	black
Flammability rating according to UL 94	V0
Material of grip body	PA 6.6
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Cable gland material	Zinc die-cast, nickel-plated

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Connector

Connection 1

Type	Plug straight M12 SPEEDCON / IP65
Number of positions	4
Coding type	D (Data)
Shielded	yes
Handle color	black
Material	CuSn (Contact) Ni/Au (Contact surface) PA 6.6 (Contact carriers) PA 6.6 (Grip) Zinc die-cast, nickel-plated (Screw connection)
Standards/regulations	PA 6.6: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
Insertion/withdrawal cycles	≥ 100
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Tightening torque	0.4 Nm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 85 °C

Connection 2

Type	free cable end
------	----------------

Cable / line

Cable length	10 m
Cable weight	70 kg/km
Number of positions	4
Shielded	yes
Cable type	PROFINET RADOX [®] railway application CAT5 [937]
Signal speed	75 c
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm ²
Wire diameter incl. insulation	approx. 1.5 mm
External cable diameter	6.6 mm ±0.4 mm
Outer sheath, material	PE-X
External sheath, color	black RAL 9005
Conductor material	silver-plated Cu litz wires
Material wire insulation	Foamed PE
Single wire, color	white-blue, orange-yellow
Thickness, outer sheath	approx. 1 mm
Overall twist	Star quad

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Max. conductor resistance	≤ 54.4 Ω/km
Coupling resistance	200.00 mΩ/m (f ≤ 30 MHz)
Wave impedance	100 Ω ±5 Ω (f = 100 MHz)
Working capacitance	≤ 65 pF (core-core)
	≤ 100 pF (core-shield)
Nominal voltage, cable	300 V AC
Test voltage	2000 V AC (50 Hz, 5 minutes)
Minimum bending radius, fixed installation	6 x D
Near end crosstalk attenuation (NEXT)	73 dB (with 1 MHz)
	70 dB (at 4 MHz)
	65 dB (at 10 MHz)
	57 dB (at 31.5 MHz)
	52 dB (at 62.5 MHz)
	48 dB (at 100 MHz)
Return loss (RL)	25 dB (at 4 MHz)
	30 dB (at 10 MHz)
	30 dB (at 31.5 MHz)
	30 dB (at 62.5 MHz)
	28 dB (at 100 MHz)
Remote crosstalk attenuation (FEXT)	78 dB (with 1 MHz)
	77 dB (at 4 MHz)
	70 dB (at 10 MHz)
	65 dB (at 31.5 MHz)
	56 dB (at 62.5 MHz)
	48 dB (at 100 MHz)
Shield attenuation	2 dB (with 1 MHz)
	4.4 dB (at 4 MHz)
	7.4 dB (at 10 MHz)
	14 dB (at 31.5 MHz)
	20 dB (at 62.5 MHz)
	26 dB (at 100 MHz)
	40 dB (30 MHz ≤ f ≤ 100 MHz)
Halogen-free	According to EN 50267-2-1
Flame resistance	EN 60332-1-2
	EN 50266
	EN 60332-3-25
	NF C32-070, 2.1
	NF C32-070, 2.2
	UL 1685, 12 (FT4)
	in accordance with ISO 6722-1 5.22 (UN ECE-R 118.01)
Resistance to oil	according to IRM 902, 72 h at 100 °C
Fire protection in rail vehicles	BS 6853 (Category Ia, Ib, II)
	GM/RT 2130 (Category Ia, Ib, II)
	EN 45545 (Risk level HL1 - HL3)

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

	DIN 5510 (Fire protection level 1, 2, 3, 4)
	NF F16-101 (Category A1, A2, B)
	NF F16-101 (Class C/F0)
	NFPA 130
	UNI CEI 11170 (Risk level LR1 - LR4)
Other resistance	Resistance to fuels according to IRM 903, 168 h at 70 °C
Ambient temperature (operation)	-50 °C ... 90 °C (cable, fixed installation)
	-40 °C ... 90 °C (Cable, flexible installation)
Ambient temperature (installation)	-25 °C ... 90 °C
Signal type/category	PROFINET CAT5 (IEC 11801), 100 Mbps
	Ethernet CAT5 (IEC 11801), 100 Mbps

Ambient conditions

Degree of protection	IP65
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 85 °C (Plug / socket)

Standards and regulations

M12

Standards/specifications	IEC 61076-2-101
--------------------------	-----------------

M12


Standards/specifications	EN 50155
--------------------------	----------

1407341


<https://www.phoenixcontact.com/gb/products/1407341>

Drawings

Circuit diagram

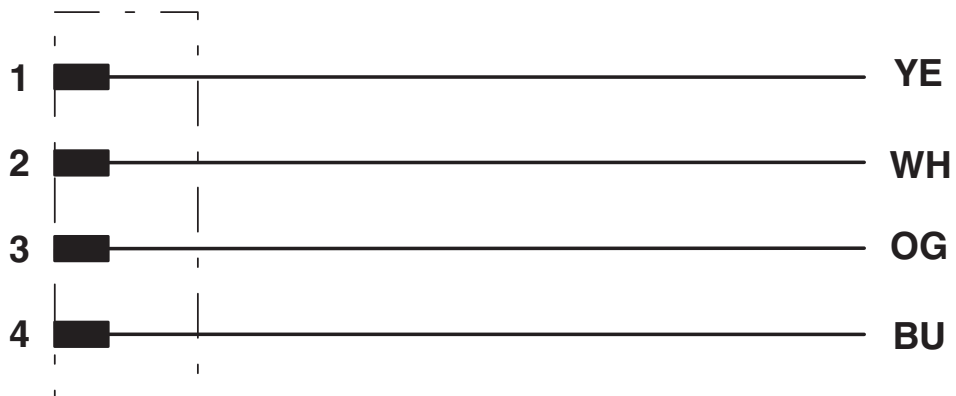

Schematic diagram

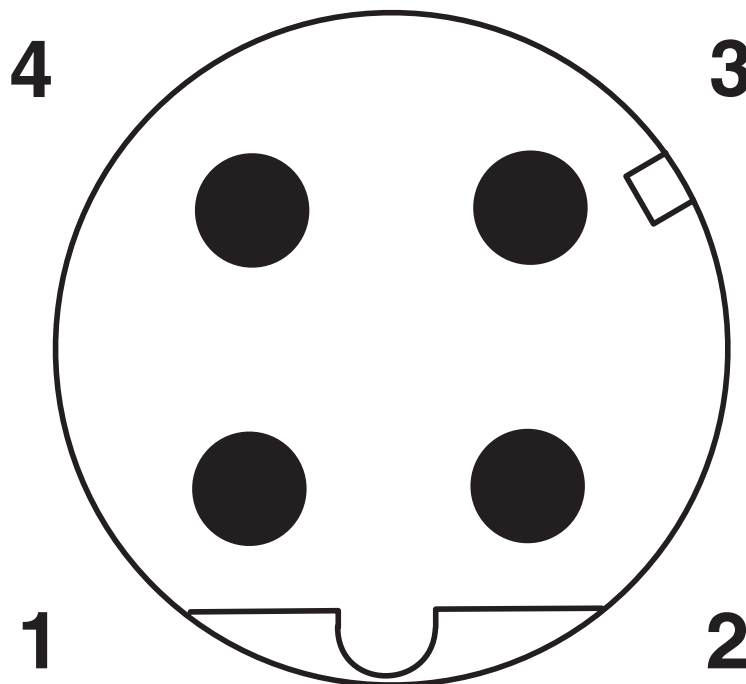


Pin assignment M12 male connector, 4-pos., D-coded, male side

Network cable - NBC-MSD/10,0-937 SCO RAIL

1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Dimensional drawing

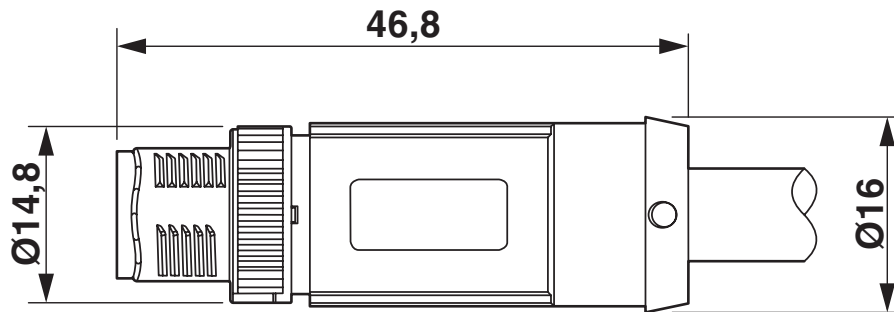

M12 SPEEDCON plug, straight, shielded

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Approvals



EAC

Approval ID: RU D-DE.HB35.B.00387

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Classifications

ECLASS

ECLASS-9.0	27060308
ECLASS-10.0.1	27060308
ECLASS-11.0	27060307

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Environmental Product Compliance

REACH SVHC	Dechlorane Plus
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Accessories

Network cable

Network cable - NBC-MSD SCO RAIL/.../... - 1412178

<https://www.phoenixcontact.com/gb/products/1412178>



Network cable, PROFINET CAT5 (100 Mbps), Ethernet CAT5 (100 Mbps), 4-position, Variable cable type, shielded, Plug straight M12 SPEEDCON / IP65, coding: D, on free cable end, cable length: Free input (0.2 ... 40.0 m), For railway applications

Network cable

Network cable - NBC-MRD SCO RAIL/.../... - 1412179

<https://www.phoenixcontact.com/gb/products/1412179>



Network cable, PROFINET CAT5 (100 Mbps), Ethernet CAT5 (100 Mbps), 4-position, Variable cable type, shielded, Plug angled M12 SPEEDCON / IP65, coding: D, on free cable end, cable length: Free input (0.2 ... 40.0 m), For railway applications

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Network cable

Network cable - NBC-MSD-MSD SCO RAIL/.../... - 1412177

<https://www.phoenixcontact.com/gb/products/1412177>



Network cable, PROFINET CAT5 (100 Mbps), Ethernet CAT5 (100 Mbps), 4-position, Variable cable type, shielded, Plug straight M12 SPEEDCON / IP65, coding: D, on Plug straight M12 SPEEDCON / IP65, coding: D, cable length: Free input (0.2 ... 40.0 m), For railway applications

Network cable

Network cable - NBC-FSD SCO RAIL/.../... - 1412181

<https://www.phoenixcontact.com/gb/products/1412181>



Network cable, PROFINET CAT5 (100 Mbps), Ethernet CAT5 (100 Mbps), 4-position, Variable cable type, shielded, free cable end, on Socket straight M12 SPEEDCON / IP65, coding: D, cable length: Free input (0.2 ... 40.0 m), For railway applications

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Torque screwdriver

Torque screwdriver - TSD 04 SAC - 1208429

<https://www.phoenixcontact.com/gb/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

Torque screwdriver

Torque screwdriver - TSD-M 1,2NM - 1212224

<https://www.phoenixcontact.com/gb/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Adapter insert

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600

<https://www.phoenixcontact.com/gb/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Tool

Tool - SAC BIT M12-D15 - 1208432

<https://www.phoenixcontact.com/gb/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Sealing cap

Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873

<https://www.phoenixcontact.com/gb/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



Locking clip

Locking clip - SAC-M12-EXCLIP-M - 1558988

<https://www.phoenixcontact.com/gb/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Marker pen

Marker pen - B-STIFT - 1051993

<https://www.phoenixcontact.com/gb/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Conductor marker carrier

Conductor marker carrier - PATG HF 3/18 - 1014059

<https://www.phoenixcontact.com/gb/products/1014059>



Conductor marker carrier, transparent/black, unlabeled, mounting type: slide-on, cable diameter range: 4 ... 7 mm, lettering field size: 18 x 4 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL

1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Conductor marker carrier

Conductor marker carrier - PATG HF 3/23 - 1014060

<https://www.phoenixcontact.com/gb/products/1014060>



Conductor marker carrier, transparent/black, unlabeled, mounting type: slide-on, cable diameter range: 4 ... 7 mm, lettering field size: 23 x 4 mm

Conductor marker carrier

Conductor marker carrier - PATG HF 3/30 - 1014061

<https://www.phoenixcontact.com/gb/products/1014061>



Conductor marker carrier, transparent/black, unlabeled, mounting type: slide-on, cable diameter range: 4 ... 7 mm, lettering field size: 30 x 4 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL

1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Conductor marker carrier

Conductor marker carrier - PATG HF 4/18 - 1014065

<https://www.phoenixcontact.com/gb/products/1014065>



Conductor marker carrier, transparent/black, unlabeled, mounting type: slide-on, cable diameter range: 5 ... 10 mm, lettering field size: 18 x 4 mm

Conductor marker carrier

Conductor marker carrier - PATG HF 4/23 - 1014066

<https://www.phoenixcontact.com/gb/products/1014066>



Conductor marker carrier, transparent/black, unlabeled, mounting type: slide-on, cable diameter range: 5 ... 10 mm, lettering field size: 23 x 4 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Conductor marker carrier

Conductor marker carrier - PATG HF 4/30 - 1014067

<https://www.phoenixcontact.com/gb/products/1014067>



Conductor marker carrier, transparent/black, unlabeled, mounting type: slide-on, cable diameter range: 5 ... 10 mm, lettering field size: 30 x 4 mm

Cable marker carrier

Cable marker carrier - KMK HP (25X6) - 0830720

<https://www.phoenixcontact.com/gb/products/0830720>



Cable marker carrier, transparent, unlabeled, mounting type: Assembly with cable ties, cable diameter: ≥ 6 mm, lettering field size: 25 mm x 6 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable marker carrier

Cable marker carrier - KMK HP (29X8) - 0830721

<https://www.phoenixcontact.com/gb/products/0830721>

Cable marker carrier, transparent, unlabeled, mounting type: Assembly with cable ties, cable diameter: ≥ 6 mm, lettering field size: 29 x 8 mm



Cable marker

Cable marker - WMTB HF (40X12)R YE - 0830408

<https://www.phoenixcontact.com/gb/products/0830408>

Cable marker, Roll, yellow, unlabeled, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, mounting type: Assembly with cable ties, cable diameter: ≥ 6 mm, lettering field size: 40 x 12 mm, Number of individual labels: 1000



Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable marker

Cable marker - WMTB HF (55X15)R YE - 0830410

<https://www.phoenixcontact.com/gb/products/0830410>



Cable marker, Roll, yellow, unlabeled, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, mounting type: Assembly with cable ties, cable diameter: ≥ 6 mm, lettering field size: 55 x 15 mm, Number of individual labels: 1000

Cable marker

Cable marker - WMTB HF (55X25)R YE - 0830412

<https://www.phoenixcontact.com/gb/products/0830412>



Cable marker, Roll, yellow, unlabeled, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, mounting type: Assembly with cable ties, cable diameter: ≥ 6 mm, lettering field size: 55 x 25 mm, Number of individual labels: 500

1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Shrink sleeve

Shrink sleeve - WMS-2 HF 6,4 (60X10)RL YE - 0801025

<https://www.phoenixcontact.com/gb/products/0801025>



Shrink sleeve, Roll, yellow, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL: without print, Cut, mounting type: slide-on, cable diameter range: 3.2 ... 6.4 mm, lettering field size: 60 x 10 mm, Number of individual labels: 1000

Shrink sleeve

Shrink sleeve - WMS-2 HF 6,4 (EX10)RL YE - 0833244

<https://www.phoenixcontact.com/gb/products/0833244>



Shrink sleeve, Roll, yellow, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK W: without print, unperforated, mounting type: slide-on, cable diameter range: 3.2 ... 6.4 mm, lettering field size: 10 x 100000 mm

1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Shrink sleeve

Shrink sleeve - WMS-2 HF 9,5 (60X16)RL YE - 0801029

<https://www.phoenixcontact.com/gb/products/0801029>



Shrink sleeve, Roll, yellow, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL: without print, Cut, mounting type: slide-on, cable diameter range: 4.8 ... 9.5 mm, lettering field size: 60 x 16 mm, Number of individual labels: 500

Shrink sleeve

Shrink sleeve - WMS-2 HF 9,5 (EX16)RL YE - 0833245

<https://www.phoenixcontact.com/gb/products/0833245>



Shrink sleeve, Roll, yellow, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK W: without print, unperforated, mounting type: slide-on, cable diameter range: 4.8 ... 9.5 mm, lettering field size: continuous x 16 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Wire marking

Wire marking - UCT-WMCO 5,4 (23X8) - 0832105

<https://www.phoenixcontact.com/gb/products/0832105>



Wire marking, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: clip on, cable diameter range: 4.7 ... 5.4 mm, lettering field size: 23 x 8 mm, Number of individual labels: 18

Wire marking

Wire marking - UCT-WMCO 6,1 (23X8) - 0832106

<https://www.phoenixcontact.com/gb/products/0832106>



Wire marking, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: clip on, cable diameter range: 5.4 ... 6.1 mm, lettering field size: 23 x 8 mm, Number of individual labels: 18

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Wire marking

Wire marking - UCT-WMCO 6,8 (23X8) - 0832107

<https://www.phoenixcontact.com/gb/products/0832107>



Wire marking, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: clip on, cable diameter range: 6.1 ... 6.8 mm, lettering field size: 23 x 8 mm, Number of individual labels: 15

Wire marking

Wire marking - UCT-WMCO 7,5 (23X8) - 0832108

<https://www.phoenixcontact.com/gb/products/0832108>



Wire marking, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: clip on, cable diameter range: 6.8 ... 7.5 mm, lettering field size: 23 x 8 mm, Number of individual labels: 15

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable marker

Cable marker - WMTB-AL (40X15) - 0830524

<https://www.phoenixcontact.com/gb/products/0830524>



Cable marker, Aluminum label, aluminum color, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 40 x 15 mm

Cable marker

Cable marker - WMTB-AL (60X15) - 0830525

<https://www.phoenixcontact.com/gb/products/0830525>



Cable marker, Aluminum label, aluminum color, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 60 x 15 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable marker

Cable marker - LS-WMTB-AL (40X15) - 0831501

<https://www.phoenixcontact.com/gb/products/0831501>




Cable marker, Aluminum label, aluminum color, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 40 x 15 mm, Number of individual labels: 16

Cable marker

Cable marker - LS-WMTB-AL (40X15) BK - 0831509

<https://www.phoenixcontact.com/gb/products/0831509>



Cable marker, Aluminum label, black, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 40 x 15 mm, Number of individual labels: 16

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable marker

Cable marker - LS-WMTB-AL (60X15) - 0831502

<https://www.phoenixcontact.com/gb/products/0831502>



Cable marker, Aluminum label, aluminum color, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 60 x 15 mm, Number of individual labels: 16

Cable marker

Cable marker - LS-WMTB-AL (60X15) BK - 0831510

<https://www.phoenixcontact.com/gb/products/0831510>



Cable marker, Aluminum label, black, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 60 x 15 mm, Number of individual labels: 16

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable marker

Cable marker - LS-WMTB-AL (100X15) - 0831503

<https://www.phoenixcontact.com/gb/products/0831503>



Cable marker, Aluminum label, aluminum color, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 100 x 15 mm, Number of individual labels: 8

Cable marker

Cable marker - LS-WMTB-AL (100X15) BK - 0831511

<https://www.phoenixcontact.com/gb/products/0831511>



Cable marker, Aluminum label, black, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, mounting type: Assembly with cable ties, cable diameter: > 4.6 mm, lettering field size: 100 x 15 mm, Number of individual labels: 8

1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Cable-cutting tool

Cable-cutting tool - CUTFOX 12 - 1212128

<https://www.phoenixcontact.com/gb/products/1212128>



Cable cutter, for copper and aluminum up to 12 mm diameter (up to 35 mm²)

Diagonal cutter

Diagonal cutter - CUTFOX-S VDE - 1212207

<https://www.phoenixcontact.com/gb/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Diagonal cutter

Diagonal cutter - MICROFOX-SP-1 - 1212487

<https://www.phoenixcontact.com/gb/products/1212487>



Electronic diagonal cutter, tapered head, without chamfer, with opening spring, non-reflective phosphate-treated surface, punched version

Stripping tool

Stripping tool - WIREFOX 4 - 1212156

<https://www.phoenixcontact.com/gb/products/1212156>



Stripping tool, for cables and conductors (especially for rubber and silicone insulations) from 0.1 - 4 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Stripping tool

Stripping tool - WIREFOX-E 4 - 1212704

<https://www.phoenixcontact.com/gb/products/1212704>



Stripping tool, for cables and conductors (especially for rubber and silicone insulations) from 0.1 - 4 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

Stripping tool

Stripping tool - WIREFOX 10 - 1212150

<https://www.phoenixcontact.com/gb/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-M12MSD-4QO SH PN - 1411068

<https://www.phoenixcontact.com/gb/products/1411068>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, halogen-free, shielded, Plug straight M12 SPEEDCON, Coding: D, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 5 mm ... 9.7 mm

Data connector

Data connector - SACC-M12FSD-4QO SH PN - 1411071

<https://www.phoenixcontact.com/gb/products/1411071>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, halogen-free, shielded, Socket straight M12 SPEEDCON, Coding: D, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 5 mm ... 9.7 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-M12MSD-4PL SH PN - 1424682

<https://www.phoenixcontact.com/gb/products/1424682>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug straight M12, Coding: D, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

Data connector

Data connector - SACC-M12MRD-4PL SH PN - 1424684

<https://www.phoenixcontact.com/gb/products/1424684>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug angled M12, Coding: D, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-M12FSD-4PL SH PN - 1424683

<https://www.phoenixcontact.com/gb/products/1424683>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Socket straight M12, Coding: D, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

Data connector

Data connector - SACC-M12FRD-4PL SH PN - 1424685

<https://www.phoenixcontact.com/gb/products/1424685>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Socket angled M12, Coding: D, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-M12MSD-4CT-CM SH PN - 1422846

<https://www.phoenixcontact.com/gb/products/1422846>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug straight M12, Coding: D, Crimp connection, knurl material: Zinc die-cast, tin-plated, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Data connector

Data connector - SACC-M12MRD-4CT-CM SH PN - 1422847

<https://www.phoenixcontact.com/gb/products/1422847>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug angled M12, Coding: D, Crimp connection, knurl material: Zinc die-cast, tin-plated, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-M12FSD-4CT-CM SH PN - 1422848

<https://www.phoenixcontact.com/gb/products/1422848>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Socket straight M12, Coding: D, Crimp connection, knurl material: Zinc die-cast, tin-plated, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Data connector

Data connector - SACC-M12FRD-4CT-CM SH PN - 1422849

<https://www.phoenixcontact.com/gb/products/1422849>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Socket angled M12, Coding: D, Crimp connection, knurl material: Zinc die-cast, tin-plated, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-PO12MSD-4CT-CM SH PN - 1021830

<https://www.phoenixcontact.com/gb/products/1021830>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug straight M12 Push-Pull, Coding: D, Crimp connection, knurl material: PA 6.6, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Data connector

Data connector - SACC-PO12MRD-4CT-CM SH PN - 1021831

<https://www.phoenixcontact.com/gb/products/1021831>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug angled M12 Push-Pull, Coding: D, Crimp connection, knurl material: PA 6.6, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Network cable - NBC-MSD/10,0-937 SCO RAIL



1407341

<https://www.phoenixcontact.com/gb/products/1407341>

Data connector

Data connector - SACC-M12MSD-4QO SH ETH - 1411066

<https://www.phoenixcontact.com/gb/products/1411066>



Data connector, Ethernet CAT5 (100 Mbps), 4-position, halogen-free, shielded, Plug straight M12 SPEEDCON, Coding: D, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 5 mm ... 9.7 mm

Data connector

Data connector - SACC-M12FSD-4QO SH ETH - 1411069

<https://www.phoenixcontact.com/gb/products/1411069>



Data connector, Ethernet CAT5 (100 Mbps), 4-position, halogen-free, shielded, Socket straight M12 SPEEDCON, Coding: D, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 5 mm ... 9.7 mm

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

info@phoenixcontact.co.uk