

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE



1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Power cable, 3-position, PVC, black, Plug straight M12, coding: S, on free cable end, cable length: 5 m, for AC current up to 16 A/230 V

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Protection against incorrect connection using special S-coding

Commercial Data

Item number	1411638
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	BF1CBB
Catalog Page	Page 288 (C-2-2019)
GTIN	4046356937382
Weight per Piece (including packing)	440.8 g
Weight per Piece (excluding packing)	440.3 g
Customs tariff number	85444290
Country of origin	PL

1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Technical Data

Product properties

Product type	Power cable
Number of positions	3
Application	Power supply
No. of cable outlets	1
Shielded	no
Coding	S power

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Color Handle area	black
Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	230 V AC
	230 V DC
Nominal current I_N	16 A
Protective circuit	unwired

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Head design	Plug
Head cable outlet	straight
Head thread type	M12
Coding	S

Connection 2

Head design	free cable end
-------------	----------------

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE




1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Cable / line

Cable length	5 m
--------------	-----

PVC black [PVC]

Dimensional drawing	
Cable weight	80 kg/km
UL AWM Style	2517 (105 °C / 300 V)
Number of positions	3
Shielded	no
Cable type	PVC black [PVC]
Conductor cross section	3x 1.5 mm ²
Wire diameter incl. insulation	2.4 mm ±0.1 mm
External cable diameter	6.8 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	≤ 13.3 Ω/km (at 20 °C)
Insulation resistance	≥ 10 MΩ*km (at 20 °C)
Nominal voltage, cable	300 V AC
Test voltage	2000 V AC
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	12 x D
Flame resistance	according to IEC 60332-1 According to DIN EN 60332-1-2 According to VW-1 According to FT1
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -5 °C ... 90 °C (Cable, flexible installation)

Ambient conditions

Degree of protection	IP65 IP67 (without preloading, as additional test in accordance with IEC 60529)
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE



1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Standards and regulations

Standards/specifications

IEC 61076-2-111

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE




1411638

<https://www.phoenixcontact.com/pc/products/1411638>


Drawings

Dimensional drawing

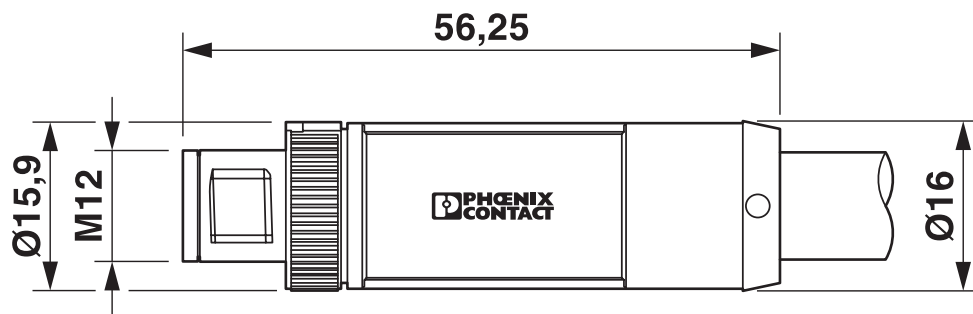

Plug, M12 x 1, straight

Circuit diagram

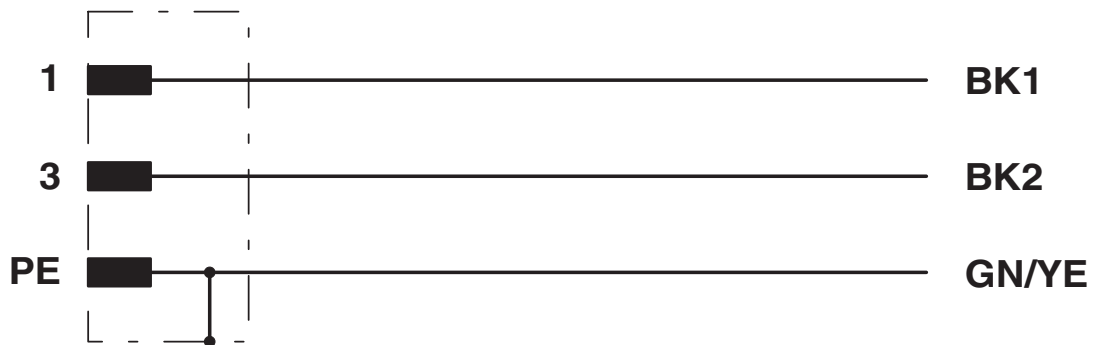


Power cable - SAC-3P-M12MSS/ 5,0-PVC PE

1411638

<https://www.phoenixcontact.com/pc/products/1411638>



Schematic diagram

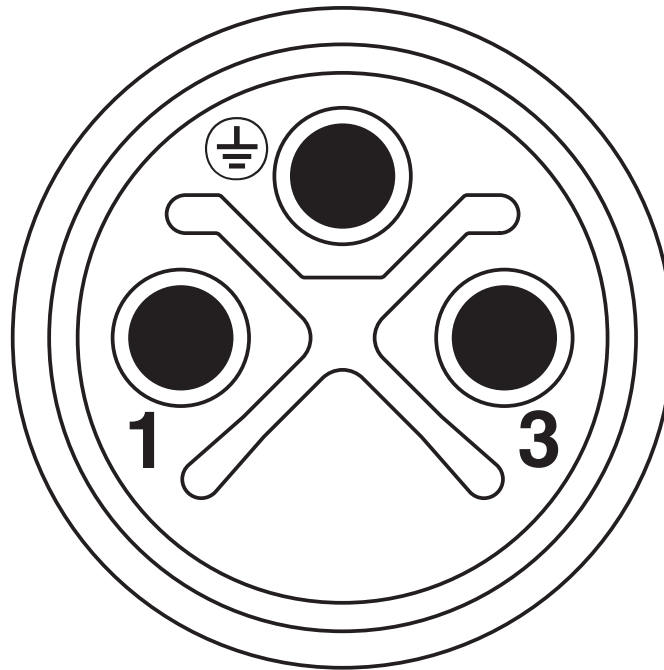

Pin assignment of M12 plug, 3-pos., S-coded, view of pin side

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE



1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Approvals



EAC

Approval ID: RU C-DE.BL08.B.00286



EAC

Approval ID: RU D-DE.HB35.B.00387

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE



1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Classifications

ECLASS

ECLASS-9.0	27060311
ECLASS-10.0.1	27060311
ECLASS-11.0	27060311

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE



1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Power cable - SAC-3P-M12MSS/ 5,0-PVC PE



1411638

<https://www.phoenixcontact.com/pc/products/1411638>

Accessories

Tool

Tool - SAC BIT M12-D16 - 1200305

<https://www.phoenixcontact.com/pc/products/1200305>

Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, knurl diameter: 16 mm, for 4 mm hexagonal drive



Sealing cap

Sealing cap - PROT-M12 FS - 1560251

<https://www.phoenixcontact.com/pc/products/1560251>

M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field



Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com