

Housing - HC-EVO-B24-HLFD-PLBK



1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sleeve housing B24, for double locking latch, material: PA, cable outlets: 1, straight/lateral, height: 63 mm, cable gland: none, Standard

Your advantages

- Flexible cable outlet direction, lateral or straight
- Lower costs than metal version
- Low weight
- Lower risk of condensation

Housing - HC-EVO-B24-HLFD-PLBK



1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Commercial Data

Item number	1420935
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	BF7APL
Catalog Page	Page 636 (C-2-2019)
GTIN	4055626249346
Weight per Piece (including packing)	110.6 g
Weight per Piece (excluding packing)	110 g
Customs tariff number	85389099
Country of origin	PL

Housing - HC-EVO-B24-HLFD-PLBK



1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Technical Data


Notes

General	for contact inserts HC-B24, BB46, D64, DD108, M, K, HV10
---------	--

Product properties

Type	B24
Product type	Housing with locking latch
Application	Standard
No. of cable outlets	1
Housing type	Sleeve housing
Locking type	for double locking latch
Shielded	no
Cable outlet	straight
Pg screw connection	none

Dimensions

Dimensional drawing	
Width	43.8 mm
Height	63 mm
Length	120 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0 (Housing)
Impact strength	IK09
Housing material	PA

Ambient conditions

Degree of protection	IP66
Degree of protection	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical properties

Mechanical data	
Locking type	Pin

Mounting

Assembly instructions	The sleeve base housing must be supplemented with the EVO
-----------------------	---

Housing - HC-EVO-B24-HLFD-PLBK

1420935

<https://www.phoenixcontact.com/pc/products/1420935>



screw connection. The EVO screw connection is available in 4 sizes. It enables the creation of a straight or a lateral cable outlet. The EVO screw connection is assembled by hand or using a pipe wrench.

Housing - HC-EVO-B24-HLFD-PLBK





1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Drawings

Dimensional drawing

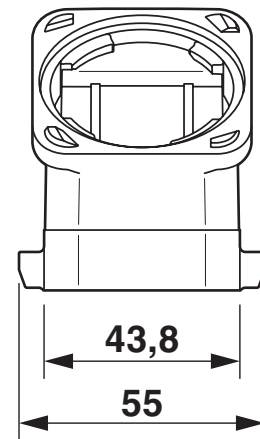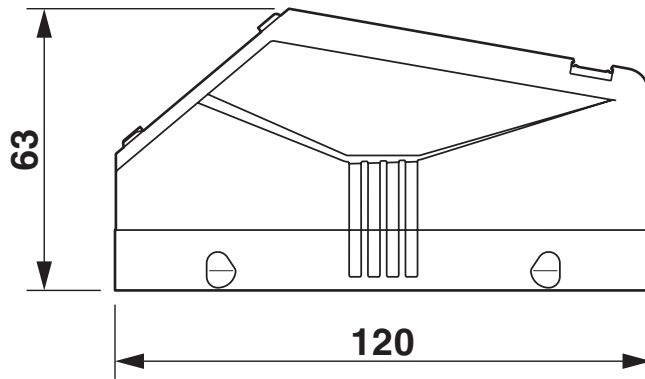

Dimensional drawing

Housing - HC-EVO-B24-HLFD-PLBK



1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Approvals

DNV

Approval ID: TAE000037S



cUL Recognized

Approval ID: E255026



UL Recognized

Approval ID: E255026



EAC

Approval ID: RU C-DE.AI30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

Housing - HC-EVO-B24-HLFD-PLBK



1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Classifications

ECLASS

ECLASS-9.0	27440202
ECLASS-10.0.1	27440202
ECLASS-11.0	27440202

ETIM

ETIM 8.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Housing - HC-EVO-B24-HLFD-PLBK



1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Housing - HC-EVO-B24-HLFD-PLBK

1420935

<https://www.phoenixcontact.com/pc/products/1420935>



Accessories

Snap-in markers

Snap-in markers - US-EMP (20X9) - 0829439

<https://www.phoenixcontact.com/pc/products/0829439>



Snap-in markers, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 20 x 9 mm, Number of individual labels: 70

Cable gland

Cable gland - HC-B-G-M20-PLRBK - 1407669

<https://www.phoenixcontact.com/pc/products/1407669>



EVO plastic cable gland with bayonet locking, for housing series B, size M20, cable diameter: 7 mm ... 13 mm

Housing - HC-EVO-B24-HLFD-PLBK

1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Cable gland

Cable gland - HC-B-G-M25-PLRBK - 1407670

<https://www.phoenixcontact.com/pc/products/1407670>



EVO plastic cable gland with bayonet locking, for housing series B, size M25, cable diameter: 9 mm ... 17 mm

Cable gland

Cable gland - HC-B-G-M32-PLRBK - 1407671

<https://www.phoenixcontact.com/pc/products/1407671>



EVO plastic cable gland with bayonet locking, for housing series B, size M32, cable diameter: 11 mm ... 21 mm

Housing - HC-EVO-B24-HLFD-PLBK

1420935

<https://www.phoenixcontact.com/pc/products/1420935>



Cable gland

Cable gland - HC-B-G-M40-PLRBK - 1407672

<https://www.phoenixcontact.com/pc/products/1407672>



EVO plastic cable gland with bayonet locking, for housing series B, size M40, cable diameter: 19 ... 28 mm

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M20-PLRBK - 1412021

<https://www.phoenixcontact.com/pc/products/1412021>



EVO corrugated pipe screw connection, size: M20, protection class: IP66, plastic

Housing - HC-EVO-B24-HLFD-PLBK

1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M25-PLRBK - 1411973

<https://www.phoenixcontact.com/pc/products/1411973>

EVO corrugated pipe screw connection, size: M25, protection class: IP66, plastic



Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M32-PLRBK - 1412022

<https://www.phoenixcontact.com/pc/products/1412022>

EVO corrugated pipe screw connection, size: M32, protection class: IP66, plastic



Housing - HC-EVO-B24-HLFD-PLBK

1420935

<https://www.phoenixcontact.com/pc/products/1420935>

Corrugated tube screw connection

Corrugated tube screw connection - HC-B-GCA-M40-PLRBK - 1412023

<https://www.phoenixcontact.com/pc/products/1412023>

EVO corrugated pipe screw connection, size: M40, protection class: IP66, plastic



Protective cover

Protective cover - HC-B24-HCLWD-PLR-BK - 1414640

<https://www.phoenixcontact.com/pc/products/1414640>

Protective cover B24, with double locking latch, protective cover material: PA, height: 21.6 mm, seal: yes, diameter of retaining cord eyelet: 30 mm



Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com