


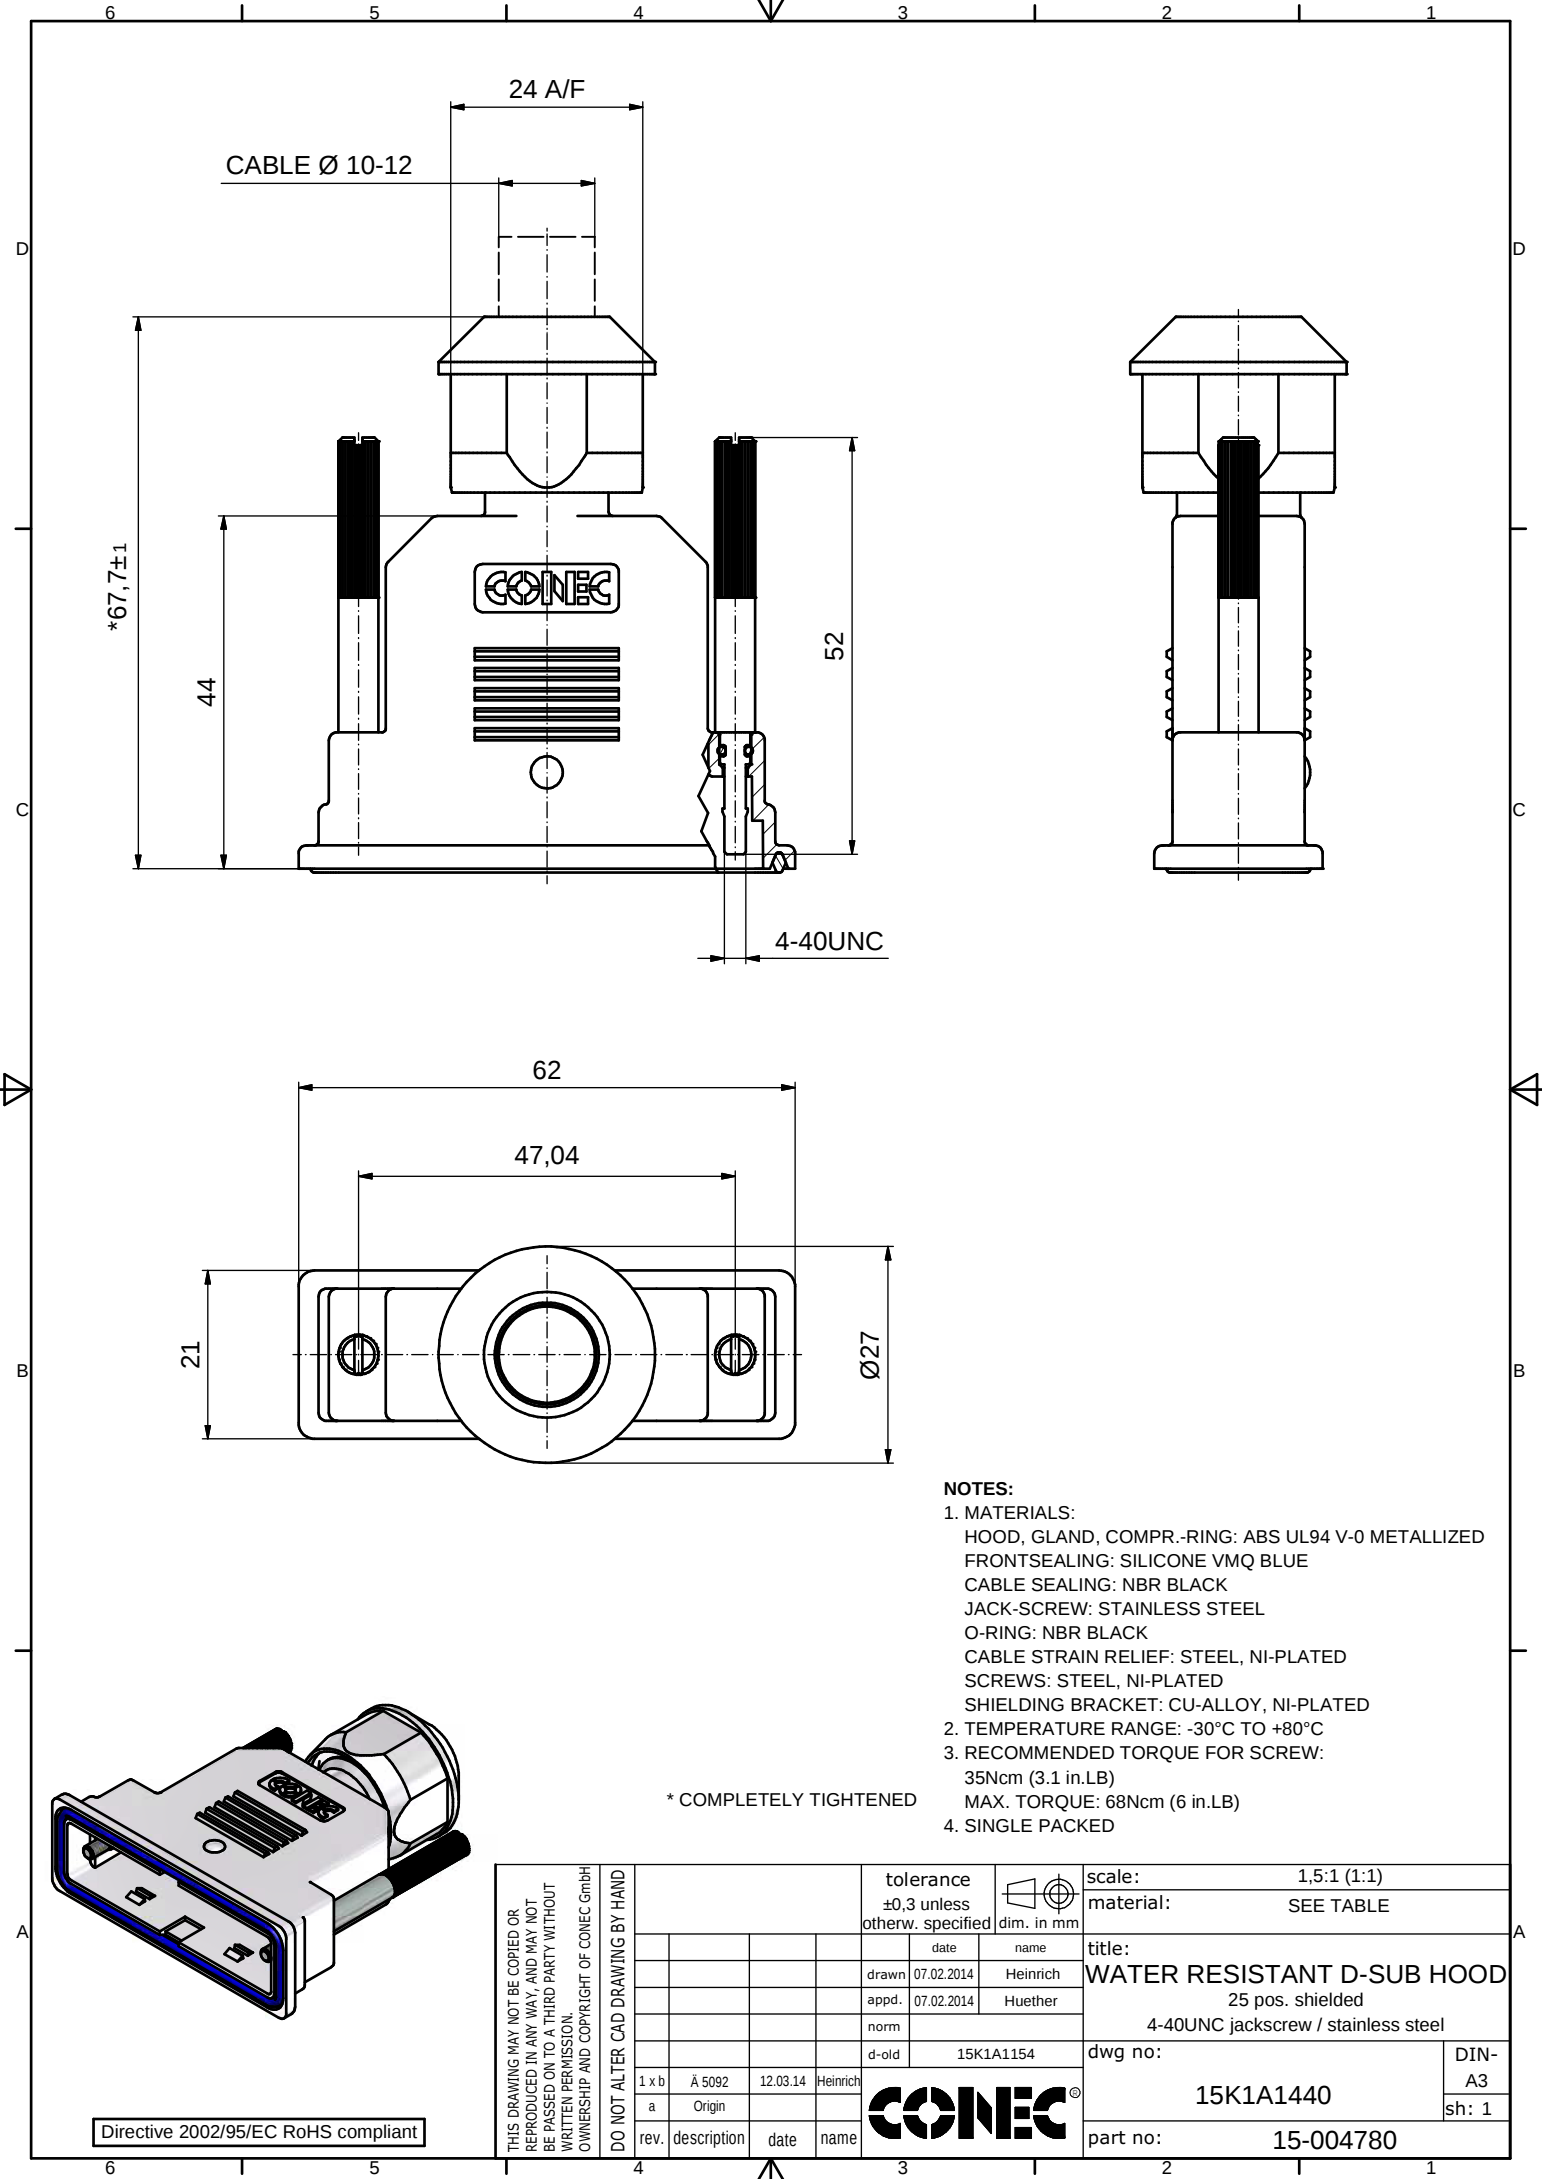

CABLE Ø 10-12

24 A/F

*67,7±1

44

CONEC

52

4-40UNC

62


47,04

21

Ø27

- NOTES:**
- MATERIALS:**
HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
FRONTSEALING: SILICONE VMQ BLUE
CABLE SEALING: NBR BLACK
JACK-SCREW: STAINLESS STEEL
O-RING: NBR BLACK
CABLE STRAIN RELIEF: STEEL, NI-PLATED
SCREWS: STEEL, NI-PLATED
SHIELDING BRACKET: CU-ALLOY, NI-PLATED
 - TEMPERATURE RANGE:** -30°C TO +80°C
 - RECOMMENDED TORQUE FOR SCREW:**
35Ncm (3.1 in.LB)
MAX. TORQUE: 68Ncm (6 in.LB)
 - SINGLE PACKED**

* COMPLETELY TIGHTENED

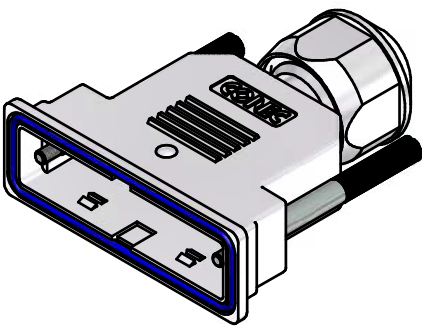

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				DO NOT ALTER CAD DRAWING BY HAND								tolerance ±0,3 unless otherw. specified				scale: 1,5:1 (1:1)			
														dim. in mm		material: SEE TABLE			
												date		name		title: WATER RESISTANT D-SUB HOOD 25 pos. shielded 4-40UNC jackscrew / stainless steel			
												drawn 07.02.2014		Heinrich					
												appd. 07.02.2014		Huether					
				norm				dwg no: DIN-A3 15K1A1440 sh: 1											
				d-old		15K1A1154													
1 x b				Ä 5092				12.03.14				Heinrich							
a				Origin															
rev.				description				date				name		part no: 15-004780					