
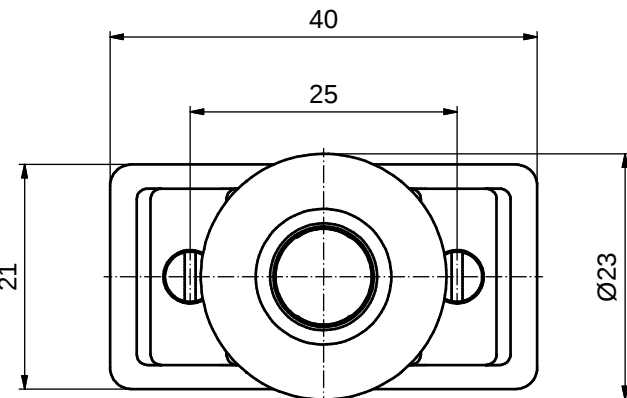


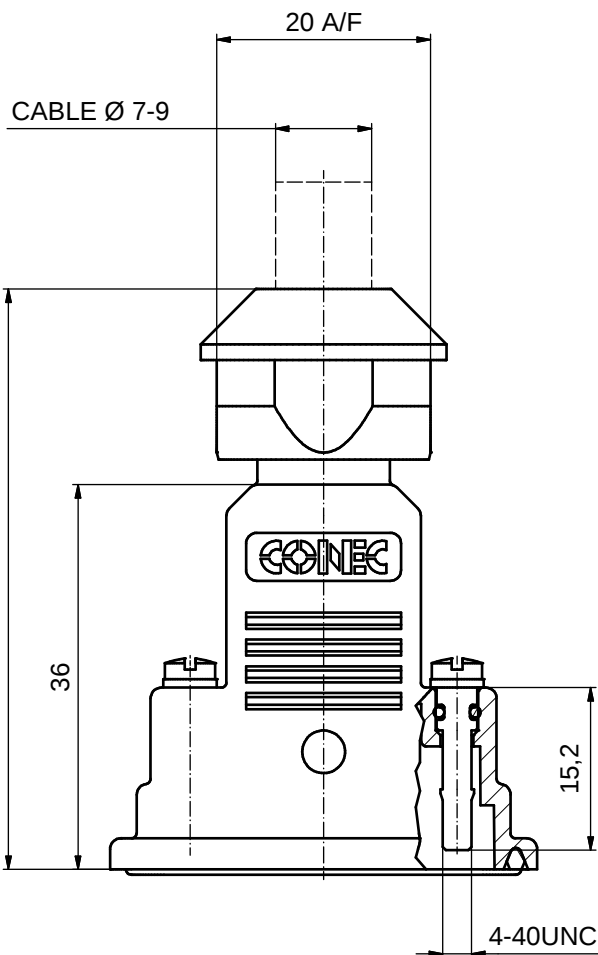

NOTES:

1. MATERIALS:

HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
 FRONTSEALING: SILICONE VMQ BLUE
 CABLE SEALING: NBR BLACK
 JACK-SCREW: STAINLESS STEEL
 O-RING: NBR BLACK
 CABLE STRAIN RELIEF: STEEL, NI-PLATED
 SCREWS: STEEL, NI-PLATED
 SHIELDING BRACKET: CU-ALLOY, NI-PLATED


(b) 2. TEMPERATURE RANGE: -30°C TO +80°C

3. RECOMMENDED TORQUE FOR SCREW:

35Ncm (3.1 in.LB)
 MAX. TORQUE: 68Ncm (6 in.LB)

4. SINGLE PACKED

* COMPLETELY TIGHTENED



Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance ± 0,3 unless otherw. specified		 dim. in mm	scale: 1,5:1 (2:1)		
								material: see notes		
						date	name	title: WATER RESISTANT D-SUB HOOD (b) SHIELDED 9 POS. SHORT SCREW 4-40UNC STAINLESS STEEL		
						drawn 25.09.2012	Huether			
						appd. 11.10.2012	Kuehle			
						norm				
						d-old		dwg no: 15K1A1155 part no: (b) 15-004810		
	3 x b	Ä5093	07.02.2014	Heinrich						DIN-A3
	a	Origin								sh: 1
	rev.	description	date	name						

CONEC®