




Extract from the online catalog

SAC-5P- 5,0-900/M12FSB

Order No.: 1507120

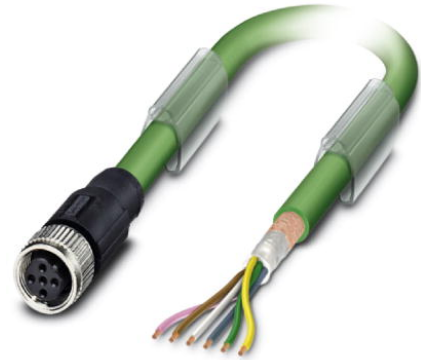

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507120>


Bus system cable, INTERBUS, 5-position, PUR, halogen-free, Green RAL 6017, shielded, Free conductor end, on Socket, straight M12, B-coded, Cable length: 5 m



| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918899981 |
| Pack | 1 pcs. |
| Customs tariff | 85444290 |
| Weight/Piece | 0.3709 KG |
| Catalog page information | Page 266 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
10/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|-----------------------|--------------------------|
| Nominal current I_N | 4 A |
| Nominal voltage U_N | 60 V |
| Number of positions | 5 |
| Volume resistance | $\leq 5 \text{ m}\Omega$ |

SAC-5P- 5,0-900/M12FSB Order No.: 1507120
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507120>

| | |
|--|----------|
| Insulation resistance | ≥ 100 MΩ |
| Length of cable | 5 m |
| Stripping length of the free conductor end | 50 mm |

General characteristics

| | |
|--------------------------|---|
| Coding | B - inverse |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP65/IP67/IP69K |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 66 |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, (nickel-plated) |
| Sealing material | NBR |
| Status display | No |

Conductor data

| | |
|----------------------------------|--------------------------------------|
| Cable type | INTERBUS |
| Cable type (abbreviation) | 900 |
| Conductor cross section | 0.25 mm ² |
| AWG signal line | 24 |
| Conductor structure, signal line | 32 x 0.10 mm |
| External cable diameter | 8.00 mm |
| Wire colors | Green-yellow, white-brown, gray-pink |
| External sheath, color | Green RAL 6017 |
| Insulation resistance | > 5 GΩ*km |
| Conductor resistance | ≤ 159.8 mΩ/m |
| Working capacitance | 60 nF (At 800 Hz) |
| Signal speed | 0.66 c |
| Nominal voltage, conductor | 250 V |
| Test voltage Core/Core | 1500 V |
| Test voltage Core/Shield | 1000 V |
| Twisted pairs | 2 cores to the pair |
| Shielding | Braided copper wires |
| Outer sheath, material | PUR |

SAC-5P- 5,0-900/M12FSB Order No.: 1507120
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507120>

| | |
|---|--------------------|
| Conductor material | Bare Cu litz wires |
| Smallest bending radius, fixed installation | 60 mm |
| Smallest bending radius, movable installation | 120 mm |

Certificates / Approvals




Certification

GOST


Diagrams/Drawings

Dimensioned drawing

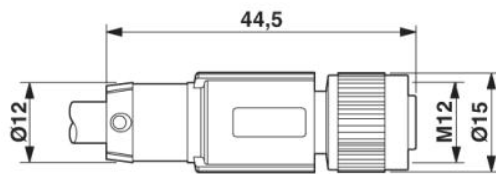

M12 x 1 female connector, straight, shielded

Circuit diagram

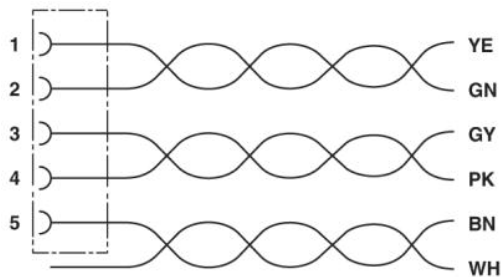


Contact assignment of the M12 socket

SAC-5P- 5,0-900/M12FSB Order No.: 1507120
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507120>

Schematic diagram

Pin assignment M12 socket, 5-pos., B-coded, view socket side

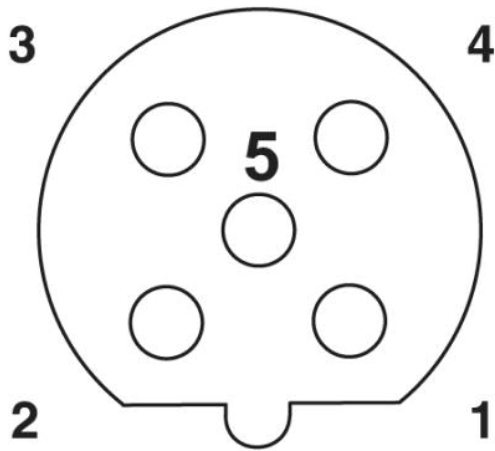

onlinecomponents.com

SAC-5P- 5,0-900/M12FSB Order No.: 1507120
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507120>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com