


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1511173514](#)
Status: **Active**
Overview: Milli-Grid Connector System
Description: 2.00mm Pitch, Milli-Grid PCB Header, Dual Row, Vertical, Through Hole, 0.05µm Gold (Au) Plating, without Peg, 2.60mm PC Tail Length, with Pick and Place Cap, 14 Circuits, Glow-Wire Capable, Tube

Documents:

| | |
|--------------------------------|--|
| Drawing (PDF) | Datasheet (PDF) |
| 3D Model | RoHS Certificate of Compliance (PDF) |
| 3D Model (PDF) | |

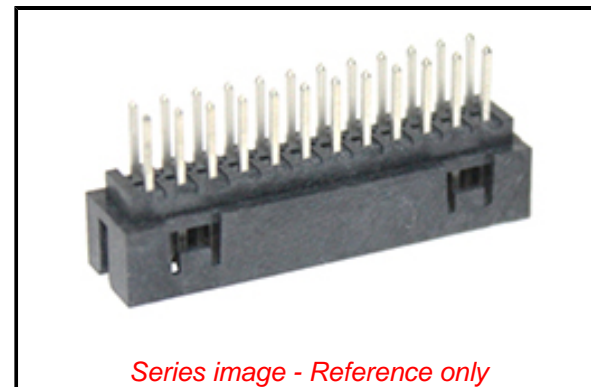

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|---------------------------------------|
| Product Family | PCB Headers |
| Series | 151117 |
| Application | Board-to-Board, Signal, Wire-to-Board |
| Overview | <u>Milli-Grid Connector System</u> |
| Product Name | Milli-Grid |
| UPC | 889056833745 |

Physical

| | |
|--------------------------------|------------------------|
| Breakaway | No |
| Circuits (Loaded) | 14 |
| Circuits (maximum) | 14 |
| Color - Resin | Black |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Capable | Yes |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | Liquid Crystal Polymer |
| Net Weight | 0.666/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PC Tail Length | 2.60mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.00mm |
| Pitch - Termination Interface | 2.00mm |
| Plating min - Mating | 0.050µm |
| Plating min - Termination | 2.000µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Robotic Placement | Pick and Place Cap |
| Shrouded | Yes |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

| | |
|-----------------|---------------|
| China ROHS | Green Image |
| ELV | Compliant |
| RoHS Phthalates | Not Contained |

Search Parts in this Series

[151117 Series](#)

Mates With

Milli-Grid Receptacle Housing [151192](#) ,
[51110](#)
Milli-Grid PCB Receptacles
[78787](#) , [78788](#) , [79107](#) , [79109](#)

Temperature Range - Operating
Termination Interface: Style

-55° to +105°C
Through Hole

Electrical

Current - Maximum per Contact
Voltage - Maximum

2.0A
125V AC

Material Info

This document was generated on 09/28/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION