


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1511200212](#)  
**Status:** **Active**  
**Overview:** [Milli-Grid™ Connector System](#)  
**Description:** 2.00mm Pitch Milli-Grid Header, Surface Mount, Dual Row, Right Angle, 0.38µm Gold (Au) Plating, without Peg, without Pick and Place Tape, 12 Circuits, Low-Halogen, Tape and Reel

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-151117-0001-001 \(PDF\)](#) [Product Literature \(PDF\)](#)  
[Packaging Specification PK-151120-3000 \(PDF\)](#)

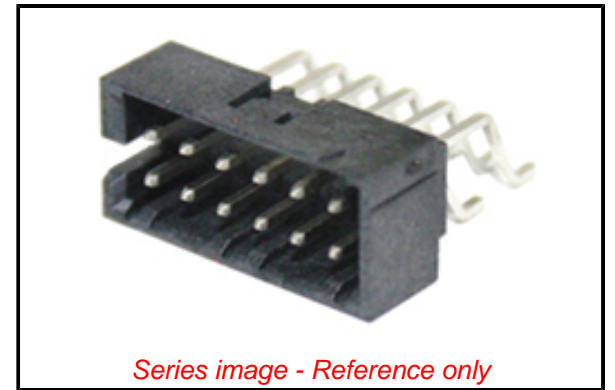

**Agency Certification**

CSA LR19980  
 UL E29179

**General**

Product Family PCB Headers  
 Series [151120](#)  
 Application Board-to-Board, Signal, Wire-to-Board  
 Overview [Milli-Grid™ Connector System](#)  
 Product Literature Order No 987651-5501  
 Product Name Milli-Grid  
 UPC 889056763714

**Physical**

Breakaway No  
 Circuits (Loaded) 12  
 Circuits (maximum) 12  
 Color - Resin Black  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Compliant Under Evaluation  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Metal Copper Alloy  
 Material - Plating Mating Gold over Nickel  
 Material - Plating Termination Tin over Nickel  
 Material - Resin Liquid Crystal Polymer  
 Net Weight 0.724/g  
 Number of Rows 2  
 Orientation Right Angle  
 PCB Locator No  
 PCB Retention None  
 Packaging Type Embossed Tape on Reel  
 Pitch - Mating Interface 2.00mm  
 Pitch - Termination Interface 2.00mm  
 Plating min - Mating 0.380µm  
 Plating min - Termination 2.000µm  
 Polarized to Mating Part Yes  
 Polarized to PCB Yes  
 Shrouded Yes  
 Stackable No  
 Surface Mount Compatible (SMC) Yes  
 Temperature Range - Operating -55°C to +105°C  
 Termination Interface: Style Surface Mount

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
 ED/30/2017 (7 July  
 2017)

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product  
 environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 Please visit the [Contact Us](#) section for any  
 non-product compliance questions.

China ROHS Green Image  
 ELV Not Relevant  
 RoHS Phthalates Not Contained

**Search Parts in this Series**

[151120](#) Series

**Mates With**

Milli-Grid Receptacle Housing (Low-  
 Halogen) [151192](#) <br>Milli-Grid Receptacle  
 Housing [51110](#) <br>Milli-Grid PCB  
 Receptacles [78787](#) , [78788](#) , [79107](#) , [79109](#)

**Electrical**

Current - Maximum per Contact	2.0A
Voltage - Maximum	125V AC

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	011
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265

**Material Info****Reference - Drawing Numbers**

Packaging Specification	PK-151120-3000
Product Specification	PS-151117-0001-001
Sales Drawing	SD-151120-0001

This document was generated on 12/27/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**