


NEW!

Mini Air Core Inductors

1512SP 2712SP

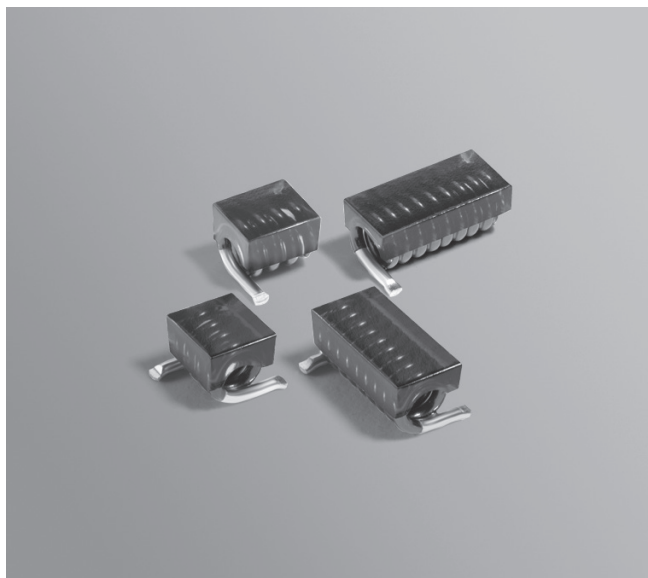

- Small air core inductors feature high Q and tight tolerances
- Acrylic jacket provides a flat top for pick and place
- Solder coated leads ensure reliable soldering
- Wide range of standard EIA inductance values
- Available in two sizes: 4.45 × 3.94 × 3.15 mm and 6.86 × 4.45 × 3.15 mm

Terminations RoHS compliant tin-silver over copper. Other terminations available at additional cost.

Ambient temperature –40°C to +125°C with Irms current, +125°C to +140°C with derated current

Storage temperature Component: –40°C to +140°C.
Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
One per billion hours / one billion hours, calculated per Telcordia SR-332

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	L ² (nH)	Percent tol ³	Q ⁴ min	SRF typ ⁵ (GHz)	DCR max ⁶ (mOhm)	Irms ⁷ max (A)	Weight (mg)
1512SP-2N5_1E_	2.5	10	80	14.0	1.0	11.1	378
1512SP-2N7_1E_	2.7	10	80	14.0	3.0	8.4	166
1512SP-4N7_2E_	4.7	5,2,1	80	18.0	2.0	9.4	513
1512SP-5N6_2E_	5.6	5,2,1	80	18.0	3.2	6.6	339
1512SP-6N8_3E_	6.8	5,2,1	80	6.4	2.1	9.8	784
1512SP-8N2_3E_	8.2	5,2,1	80	7.2	2.9	7.4	572
1512SP-10N_4E_	10.0	5,2,1	80	3.4	2.5	9.2	948
1512SP-12N_4E_	12.0	5,2,1	80	4.1	3.5	8.0	802
1512SP-15N_4E_	15.0	5,2,1	80	4.5	5.0	5.9	558
1512SP-18N_4E_	18.0	5,2,1	80	5.2	9.3	3.7	342
1512SP-22N_5E_	22.0	5,2,1	80	3.1	5.3	5.2	640
1512SP-27N_5E_	27.0	5,2,1	80	4.2	10.6	3.5	375
1512SP-33N_6E_	33.0	5,2,1	80	2.8	8.6	3.9	507
1512SP-43N_7E_	43.0	5,2,1	80	2.1	10.6	4.3	555
1512SP-51N_7E_	51.0	5,2,1	80	2.1	14.5	2.7	480
1512SP-62N_8E_	62.0	5,2,1	80	1.8	15.5	2.7	511

1. When ordering, please specify **tolerance, termination, and packaging** codes:

1512SP-62N**J**8**E****C**

Tolerance: F = 1% G = 2% J = 5% K = 10% (Table shows stock tolerances in bold.)

Termination: E = Halogen free component. RoHS compliant tin-silver (96.5/3.5) over copper terminations.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape, 700 (1512SP) or 500 (2712SP) parts per full reel. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked, 2500 (1512SP) or 2200 (2712SP) parts per full reel.

2. Inductance measured at 150 MHz with an Agilent/HP 4286 or equivalent, a Coilcraft SMD-A and correlation.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured at 150 MHz using an Agilent/HP 4291A with an Agilent/HP 16193A test fixture or equivalents.

5. SRF is measured on an Agilent 8753ES or equivalent with a Coilcraft CCF1268 test fixture.

6. DCR is measured on a Keithley 580 Micro-ohmmeter or equivalent.

7. Current that causes a 15°C temperature rise from 125°C ambient.

8. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Continued on next page



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1536-1 Revised 12/09/19

© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



Mini Air Core Inductors – 2712SP and 1512SP

Part number ¹	Inductance ² (nH)	Percent tolerance ³	Q ⁴ min	SRF typ ⁵ (GHz)	DCR max ⁶ (mOhm)	Irms ⁷ max (A)	Weight (mg)
2712SP-10N_4E	10.0	5,2,1	85	6.6	3.1	10.3	895
2712SP-12N_5E	12.0	5,2,1	85	5.8	3.4	7.8	1025
2712SP-15N_6E	15.0	5,2,1	85	4.9	3.3	8.2	1426
2712SP-18N_7E	18.0	5,2,1	85	3.9	3.5	7.9	1562
2712SP-22N_7E	22.0	5,2,1	85	3.9	4.5	7.0	1324
2712SP-27N_8E	27.0	5,2,1	85	3.1	5.0	6.6	1440
2712SP-33N_8E	33.0	5,2,1	85	3.3	7.4	5.1	985
2712SP-39N_9E	39.0	5,2,1	90	2.7	6.8	4.6	1333
2712SP-47N_0E	47.0	5,2,1	90	2.4	8.0	4.8	1416
2712SP-51N_0E	51.0	5,2,1	95	2.4	9.25	4.1	1179
2712SP-56N_0E	56.0	5,2,1	95	2.6	15.5	2.9	793
2712SP-68N_1E	68.0	5,2,1	100	2.3	16.0	3.1	859
2712SP-82N_3E	82.0	5,2,1	100	1.9	14.7	2.8	1183
2712SP-101_4E	100.0	5,2,1	100	1.8	19.0	2.3	1032
2712SP-121_4E	120.0	5,2,1	100	1.6	26.5	2.3	879
2712SP-151_6E	150.0	5,2,1	100	1.4	29.0	2.2	956

1. When ordering, please specify **tolerance, termination, and packaging** codes:

2712SP-151N₆E_C

Tolerance: F = 1% G = 2% J = 5% K = 10% (Table shows stock tolerances in bold.)

Termination: E = Halogen free component. RoHS compliant tin-silver (96.5/3.5) over copper terminations.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape, 700 (1512SP) or 500 (2712)SP parts per full reel. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked, 2500 (1512SP) or 2200 (2712SP) parts per full reel.

2. Inductance measured at 150 MHz with an Agilent/HP 4286 or equivalent, a Coilcraft SMD-A and correlation.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured at 150 MHz using an Agilent/HP 4291A with an Agilent/HP 16193A test fixture or equivalents.


5. SRF is measured on an Agilent 8753ES or equivalent with a Coilcraft CCF1268 test fixture.

6. DCR is measured on a Keithley 580 Micro-ohmmeter or equivalent.


7. Current that causes a 15°C temperature rise from 125°C ambient.

8. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

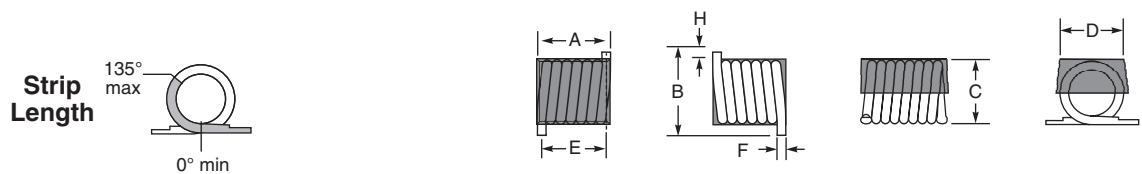

Recommended Land Patterns

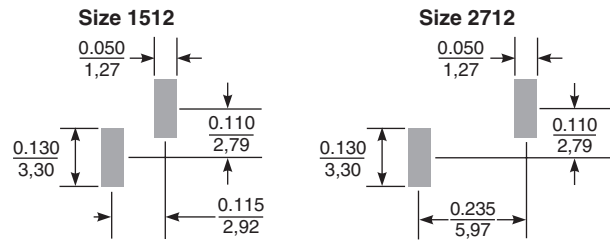

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Part Size	Units	A MAX	B MAX	C MAX	D	E	F MAX	H
1512	in	0.155	0.175	0.124 0.130 (-2N5)	0.110 ±0.010	0.115 ±0.010	0.030	0.020 ±0.010
	mm	3.94	4.45	3.15 3.30 (-2N5)	2.79 ±0.25	2.92 ±0.25	0.76	0.51 ±0.25
2712	in	0.270	0.175	0.124	0.110 ±0.010	0.230 ±0.015	0.030	0.020 ±0.10
	mm	6.86	4.45	3.15	2.79 ±0.25	5.84 ±0.38	0.76	0.51 ±0.25

Packaging 1512: 700/7" reel; 2500/13" reel Plastic tape: 12 mm wide, 0.32 mm thick, 8 mm pocket spacing, 3.3 mm pocket depth

2712: 500/7" reel; 2200/13" reel Plastic tape: 16 mm wide, 0.28 mm thick, 8 mm pocket spacing, 3.4 mm pocket depth

Recommended pick and place nozzle: OD: 0.110"; ID: 0.091"



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1536-2 Revised 12/09/19



© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information





Mini Air Core Inductors – 1512SP

Typical L vs Frequency

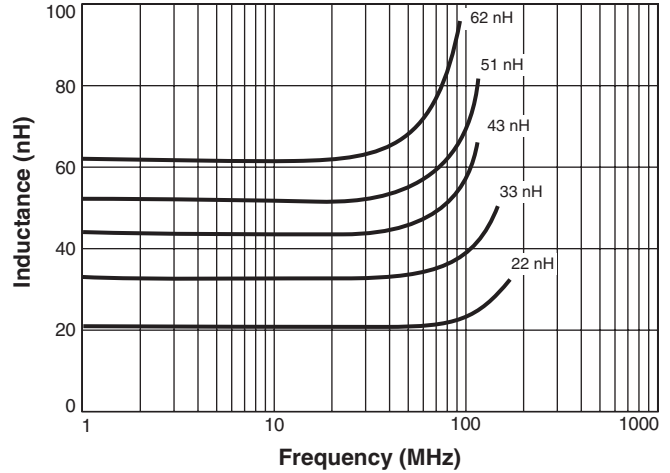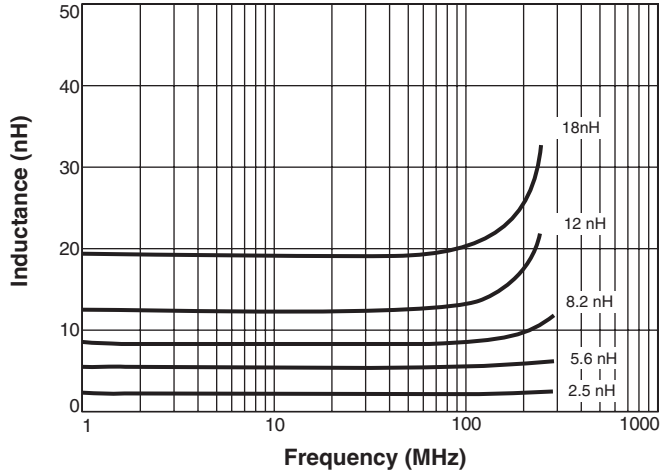



Typical Q vs Frequency

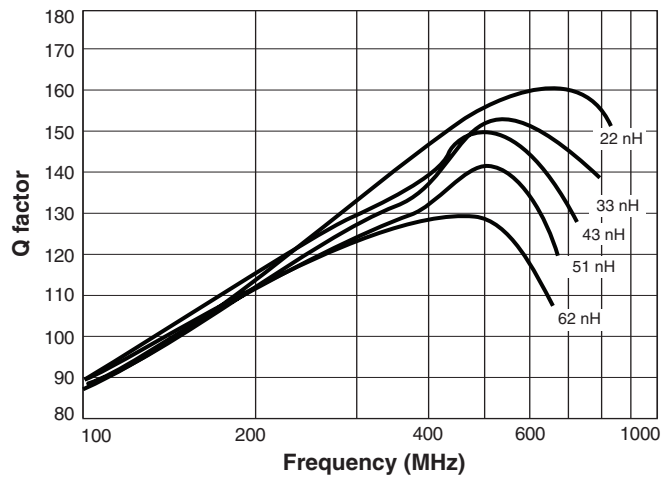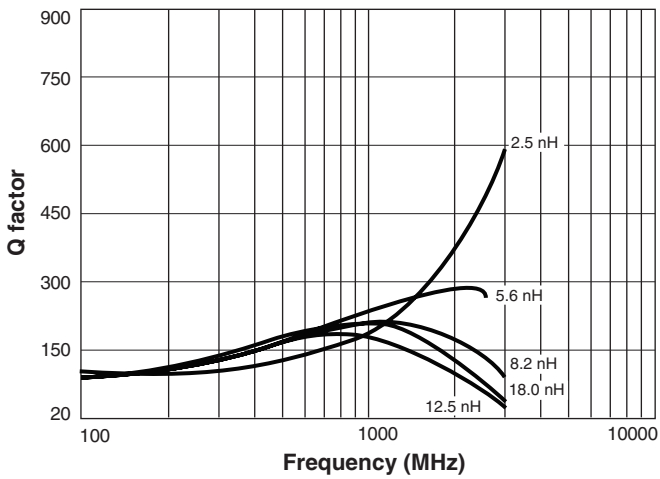



Mini Air Core Inductors – 2712SP

Typical L vs Frequency

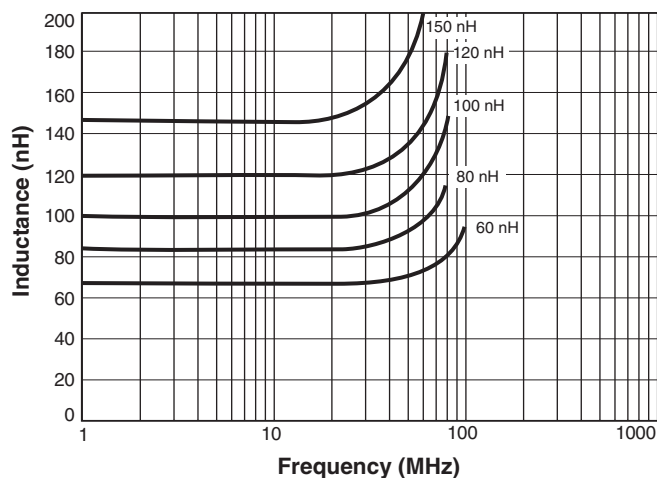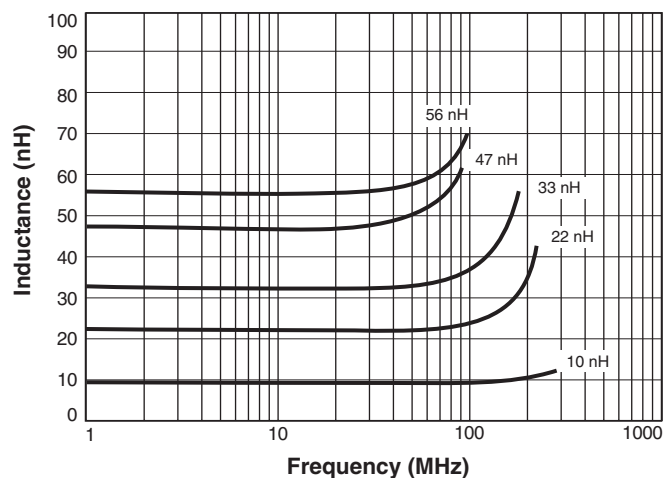

Typical Q vs Frequency

