

## Valve connectors - SACC-VQ-3CON-A-FL 24 - 1553886

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator connector, 4-pos., type A valve connector, with QUICKON connection, with red LED, connection cross section of 0.34 to 0.75 mm<sup>2</sup>, with a cable inlet for round cables of 5.6 to 9 mm



### Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356159609

### Technical data

#### Dimensions

External cable diameter	5.6 mm ... 9 mm
-------------------------	-----------------

#### Ambient conditions

Degree of protection	IP65
----------------------	------

#### General

Rated current at 40°C	4 A
Rated voltage	24 V
Number of positions	4
Status display	LED red
Overvoltage category	II
Degree of pollution	3
Connection method	QUICKON fast connection
Conductor cross section	0.75 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	18 ... 16

#### Material

Flammability rating according to UL 94	HB
Valve plug contact material	CuSn

# Valve connectors - SACC-VQ-3CON-A-FL 24 - 1553886

## Technical data

### Material

Valve plug contact surface material	Ag
Material housing valve plug	PA

### Standards and Regulations


Flammability rating according to UL 94	HB
--	----

### Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
------------	----------------

## Drawings

Dimensional drawing

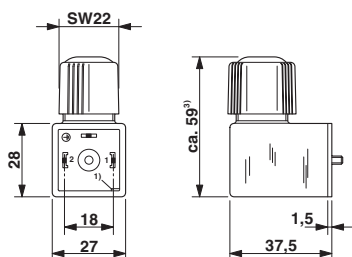

Circuit diagram



Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>