


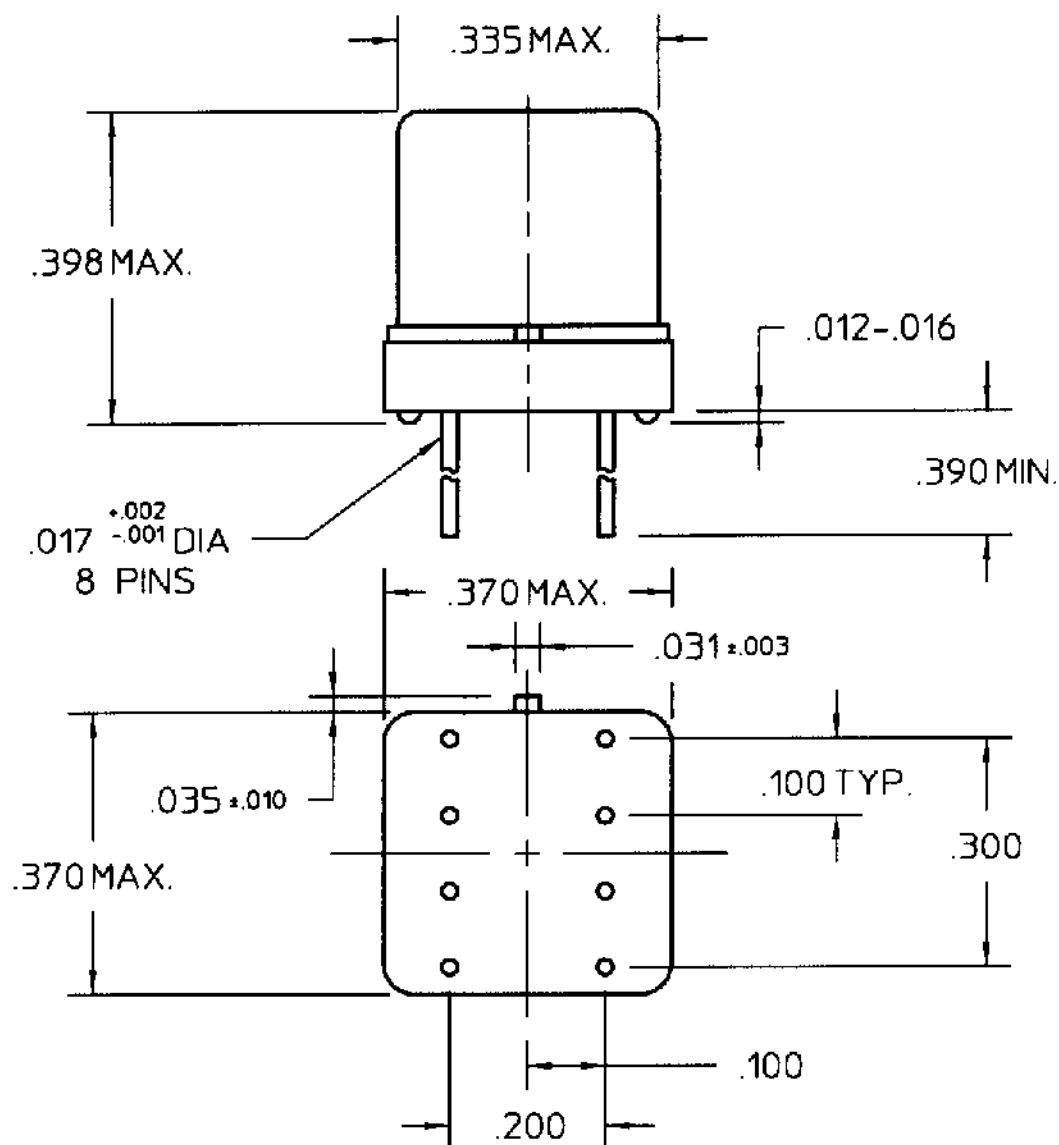

COIL: @ 25°C

RESISTANCE 390 OHMS $\pm 10\%$

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 7.0 VDC

MUST RELEASE 0.63 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX

RELEASE TIME 1.5 MS MAX

CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000
OPERATIONS

DR. R.B. 9/26/97 CR. LERRY 9/26/97



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD

CUST. NO.

TYPE "MA" RELAY

MAW-12S