

Female insert - HCC 4-F - 1600001

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Female insert, Connection method: Screw connection, Number of positions: 10, Cross section: 0.2 mm² - 4 mm², AWG: 24 - 12, Width: 92 mm, Height: 18 mm, Color: gray, Mounting type: Screw mounting




Product Features

- Sturdy strain relief for plug and socket
- Touch proof, even when unplugged



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 021733 |
| Weight per Piece (excluding packing) | 43.48 g |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

General

| | |
|--|-------------------|
| Number of levels | 1 |
| Number of connections | 10 |
| Nominal cross section | 4 mm ² |
| Color | gray |
| Insulating material | PA |
| Flammability rating according to UL 94 | V2 |
| Rated surge voltage | 6 kV |
| Degree of pollution | 3 |
| Overvoltage category | III |
| Insulating material group | I |

Female insert - HCC 4-F - 1600001

Technical data

General

| | |
|----------------------------------|---|
| Connection in acc. with standard | IEC 61984 |
| Maximum load current | 25 A (with 4 mm ² conductor cross section) |
| Nominal current I _N | 25 A |
| Nominal voltage U _N | 500 V |
| Open side panel | No |

Dimensions

| | |
|--------------------|----------|
| Width | 92 mm |
| Length | 31.5 mm |
| Height | 18 mm |
| Drill hole spacing | 83.00 mm |

Connection data

| | |
|---|----------------------|
| Connection method | Screw connection |
| Connection in acc. with standard | IEC 61984 |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Min. AWG conductor cross section, flexible | 24 |
| Max. AWG conductor cross section, flexible | 12 |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 4 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve max. | 4 mm ² |
| 2 conductors with same cross section, solid min. | 0.2 mm ² |
| 2 conductors with same cross section, solid max. | 2.5 mm ² |
| 2 conductors with same cross section, stranded min. | 0.2 mm ² |
| 2 conductors with same cross section, stranded max. | 2.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 2.5 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.25 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 1.5 mm ² |
| Stripping length | 7 mm |

Female insert - HCC 4-F - 1600001

Technical data

Connection data

| | |
|---------------------------|--------|
| Internal cylindrical gage | A4 |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Standards and Regulations

| | |
|--|-----------|
| Connection in acc. with standard | CSA |
| | IEC 61984 |
| Flammability rating according to UL 94 | V2 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141131 |
| eCl@ss 4.1 | 27141131 |
| eCl@ss 5.0 | 27141131 |
| eCl@ss 5.1 | 27141131 |
| eCl@ss 6.0 | 27141120 |
| eCl@ss 7.0 | 27141120 |
| eCl@ss 8.0 | 27149214 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC000796 |
| ETIM 5.0 | EC002021 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Approvals

Female insert - HCC 4-F - 1600001

Approvals


Approvals


CSA / UL Recognized / LR / GL / DNV / EAC / EAC

Ex Approvals

Approvals submitted

Approval details

| | |
|---|-------|
| CSA  | |
| mm ² /AWG/kcmil | 28-10 |
| Nominal current I _N | 20 A |
| Nominal voltage U _N | 300 V |

| | | | |
|---|-------|-------|-------|
| UL Recognized  | | | |
| | | B | C |
| mm ² /AWG/kcmil | 30-10 | 30-10 | 30-10 |
| Nominal current I _N | 20 A | 20 A | 20 A |
| Nominal voltage U _N | 300 V | 250 V | 300 V |

LR

GL

DNV


EAC

EAC


Female insert - HCC 4-F - 1600001

Drawings

Diagram

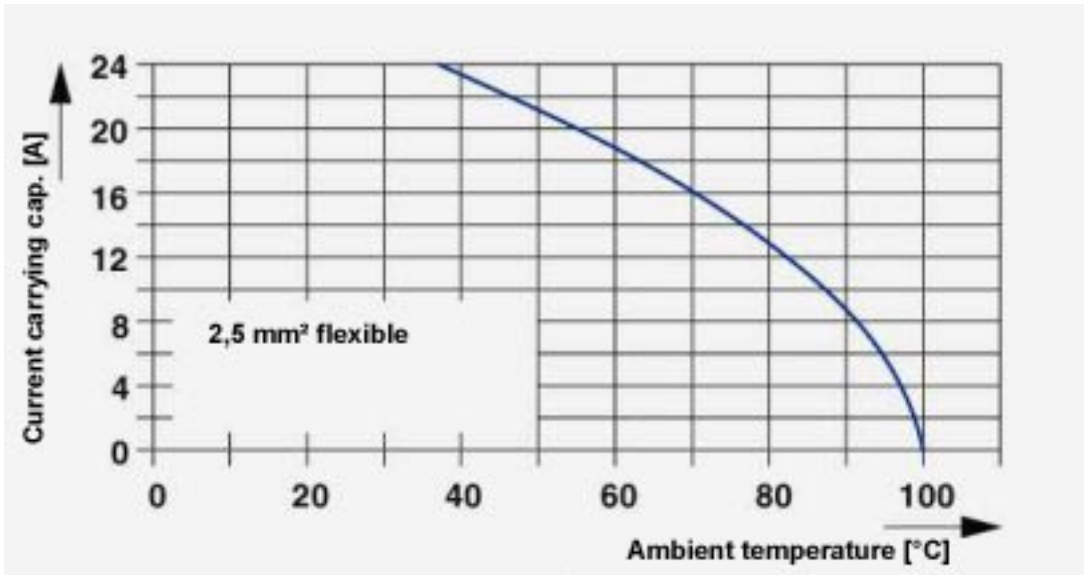

Diagram

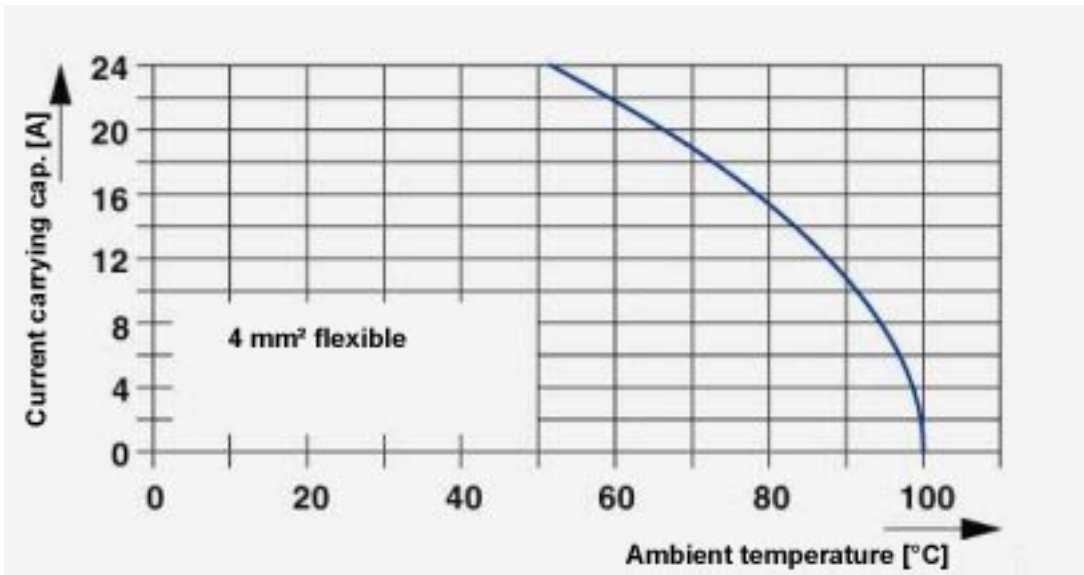

Female insert - HCC 4-F - 1600001

Dimensional drawing

