

VC-B 16-ADP/2 DSUB 25-U


Order No.: 1607862

The illustration shows the product version VC-B 10-ADP/2 DSUB 15-M

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1607862>

Mounting adapter plates 1.5 mm thick, with UNC countersunk screws,
number of inserts: 2x DSUB 25

Commercial data

GTIN (EAN)	 4 017918 969271
Note	Made-to-order
sales group	D211
Pack	1 pcs.
Customs tariff	85389099
Catalog page information	Page 376 (PC-2009)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65, when in locked state
Design	VC3

Material data

Seal material	NBR
---------------	-----

Diagrams/Drawings

Drilling plan/solder pad geometry

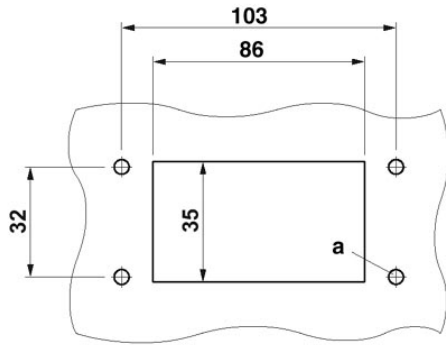

Panel cutout

a = When M4 screws are used: M4 or diameter 4.5 mm

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;