



Extract from the online catalog

# VS-PP-R-3XRJ45/5-LSA

Order No.: 1653045



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1653045>

Patch panel, RJ45, DIN rail mounting, IP20, three slots, LSA connection, CAT5e, shielding over jumper can be selected

Commercial data	
EAN	4017918970000
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.146 KG
Catalog page information	Page 198 (PC-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Mechanical characteristics	
Number of positions	8
Number of slots	3
Insertion/withdrawal cycles	≥ 200
Type of connection	LSA-PLUS
Conductor cross section	0.14 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> (solid)
Connection cross section AWG	26 ... 22 (solid)
External cable diameter	5 mm ... 8.5 mm
Color	green
Ambient temperature (operation)	0 °C ... 70 °C

VS-PP-R-3XRJ45/5-LSA Order No.: 1653045  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1653045>

**Material data**


Inflammability class acc. to UL 94	V0
Housing material	PC
Contact carrier material	PBT
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20

**Electrical characteristics**

Number of positions	8
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Rated current	1 A

**Diagrams/Drawings**

Dimensioned drawing

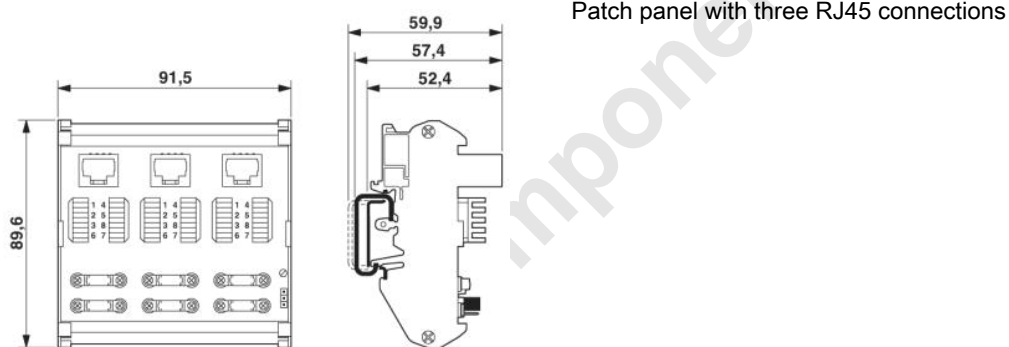

VS-PP-R-3XRJ45/5-LSA Order No.: 1653045  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1653045>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;

onlinecomponents.com