

4

3

2

1

used for:

D - SUB

F

F

E

E

D

D

C




C

B

B

A

A

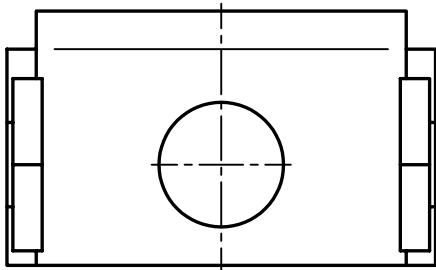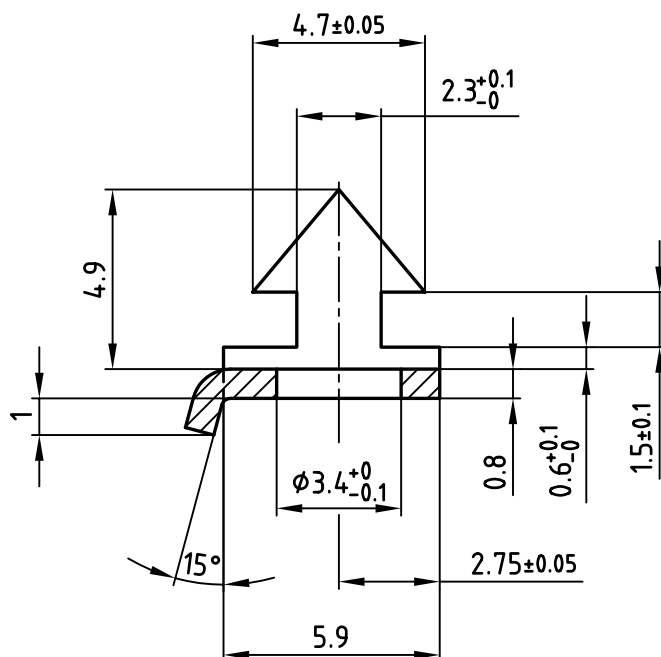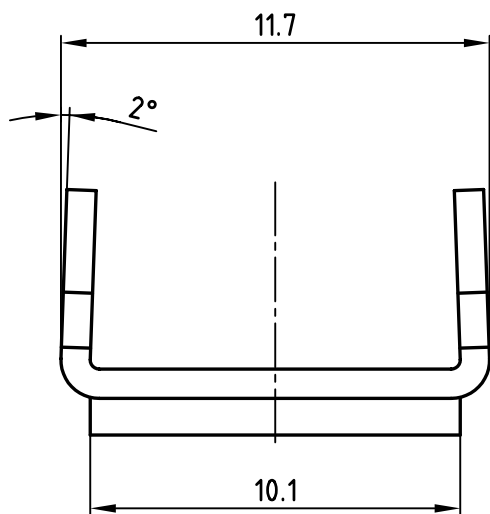

NOTES:


1. Part is splint and burrfree
3. Excellent adhesion of surface to the base material
3. radius without dimensions = R 0.25

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

finish:
nickel plated

tolerance
ISO 2768-m



scale: 5:1
material: STEEL

				1993	date	name
				drawn	05.07.	Barcinski
				appd.	05.07.	Mickenbecker
				norm		
				d-old		
						
rev.	description	date	name			

CONEC®

title:
LOCK
ø3.4
for slide lock

dwg no: AutoCADREL.13 DIN-A
4
sh: 1/1

part no: 16V1EE6A
165X10119X

4

3

2

1