used for: D-SUB

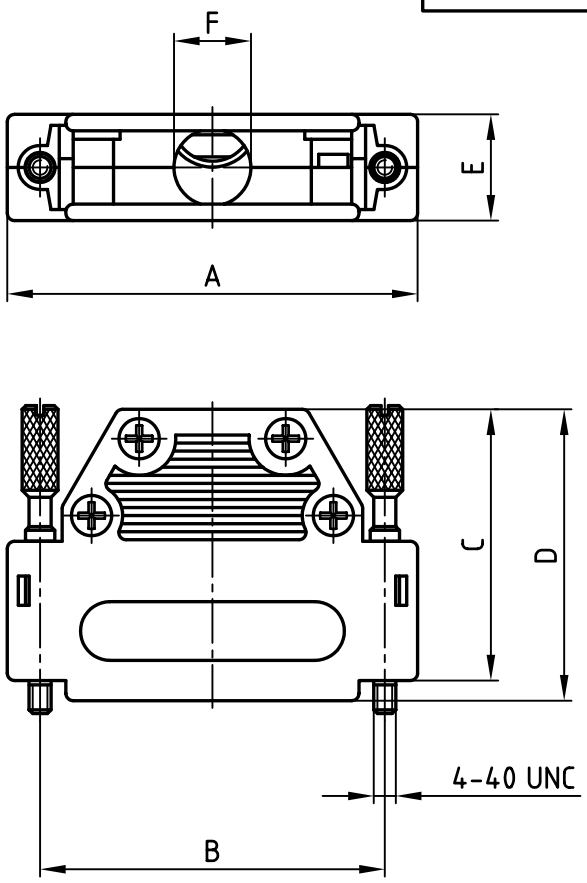

No. of pos.	A	B	C	D	E	F	Part No.
9	34.0	25.0	25.0	27.75	14.5	8.5	**165X10139XE**
15	42.3	33.3	37.0	39.75	14.5	10.0	**165X10149XE**
25	56.0	47.0	37.0	39.75	14.5	10.5	**165X10159XE**
37	72.5	63.5	37.0	39.75	14.5	10.5	**165X10169XE**
50	70.0	61.1	50.0	50.00	21.0	10.5	**165X10179XE**

Directive 2002/95/EC „RoHS" Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

NOTES:

1. HOOD: POLYAMID + GF / BLACK
2. JACKSCREW: BRASS; NICKEL PLATED
3. NUT: BRASS; NICKEL PLATED
4. STRAIN RELIEF: STEEL
5. PAN-HEAD SCREW: BRASS; NICKEL PLATED
6. COUNTERSUNK-HEAD SCREW: BRASS; NICKEL PLATED

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

dim. in mm

	date	name
2004		
drawn	08.01.	Lehmenkühler
appd.	08.01.	Kühle
norm		
d-old		

scale: 1:1

material: SEE NOTES

title:

PLASTIC HOOD

9-50pos., straight cable exit, jack screws
single packed version

dwg no: 16K1A1078

AutoCAD 2000 | DIN-A 4 | sh: 1/1

part no: SEE TABLE