



WELL SHIN TECHNOLOGY CO., LTD.

S P E C I F I C A T I O N

CUSTOMER: 研華

OPPOSITE Dept. & NAME: /

CUSTOMER' S ITEM NO. P/N:1702002600

WELL SHIN ITEM NO. : WS-001+WS-002

PRODUCT TYPE: UL;C-UL 3PIN AC POWER SUPPLY CORD

WELL SHIN DWG NO. : 1494-0003

REPORT DATE. : 2015.03.04

TAIPEI OFFICE ADDRESS:


NO.196, XIN HU 3RD ROAD,
NEI HU, TAIPEI, TAIWAN, R.O.C.
TEL: 886-2-2791-1119 FAX: 886-2-2791-9901

TAIWAN FACTORY:

1 YEN HAI RD, SEC 1 MAI TSUO CHUN
FU SHIN HSIANG GHANG HWA HSIEN TAIWAN
TEL: 04-7703081~EXT 121 FAX: 04-7703080

DEAR CUSTOMER:
IF YOU ARE PLEASED WITH OUR
SPECIFICATION , SIGNATURE PLEASE !

APPROVED BY WELL SHIN:

APPROVED BY	CHECKED	WRITER
WU;	WU;	 KUNYI LIN

LIST OF CONTENTS

1.	COVER.....	0
2.	ISSUE EDITION.....	1
3.	LIST.....	2
4.	CONSTRUCTION.....	3~7
5.	FINISHED PRODUCT DRAWING.....	8
6.	FLEXIBLE CORD MANUFACTURER OF LICENCE.....	9~11
7.	WS-001 DIMENSION OF PARTS PRODUCT DRAWING.....	12
8.	WELL SHIN WS-001 PRODUCT OF LICENCE.....	13
9.	WS-002 DIMENSION OF PARTS PRODUCT DRAWING.....	14
10.	WELL SHIN WS-002 PRODUCT OF LICENCE.....	15

SPECIFICATION

UL C-UL STANDARD POWER SUPPLY CORD

1.1 THIS SPECIFICATION APPLIES FOR UL C-UL AC POWER SUPPLY CORD; FINISHED DRAWING REFER TO PAGE 8.

1.2 OUTLINE:

PLUG	WS-001
CONNECTOR	WS-002
CORD	SVT 18AWG*3C 105°C (SHIELDED) BLACK

2. FLEXIBLE CORD:

2.1 FLEXIBLE CORD MANUFACTURER: WELL SHIN COMPANY,

2.1.1 UL LICENCE NO.E90165 SEE PAGE 9.

2.1.2 CSA LICENCE NO.1978218 SEE PAGE 10~11.

2.2 OVERALL LENGTH:1830±50MM

3. PLUG CONSTRUCTION:

3.1 PLUG MODEL NO. : WS-001.

3.2 PLUG BODY MATERIAL: MOLDED PVC COMPOUND.

3.3 ELECTRICITY RATING: 10A 125V~

3.4 POLARITY: SEE PAGE 8.

3.5 DIMENSION OF PLUG: SEE PAGE 12.

3.6 UL LICENCE NO.E115330 SEE PAGE 13.

4. CONNECTOR CONSTRUCTION:

4.1 CONNECTOR MODEL NO. : WS-002.

4.2 CONNECTOR BODY MATERIAL: MOLDED PVC COMPOUND

4.3 ELECTRICITY RATING: 10A 125V~

4.4 DIMENSION OF CONNECTOR: SEE PAGE 14.


4.5 UL LICENCE NO.E115330 SEE PAGE 15.

FLEXIBLE CORD TECHNICAL DATA

STYLE	SVT 18 AWG*3C (SHIELDED)	
Component	Cord Type	SVT
	Cord No.	3C
Conductor	Size (AWG)	18
	Construction (NO./mm)	41/0.160
Insulation	Material	PVC
	Average Thickness (mm)	0.38
	Minimum Thickness (mm)	0.34
	Over Diameter (mm)	2.2±0.15
	Color	BLACK WHITE GREEN
Jacket	Material	PVC
	Average Thickness (mm)	0.76
	Minimum Thickness (mm)	0.61
	Web (mm)	/
	Over Diameter (mm)	6.5±0.2
	Color	Black

Marking:(UL) SVT E90165 105°C VW-1 300V 3X0.824 mm²(18AWG) SHIELDED WELL
SHIN CSA TYPE SVT 105°C 3X0.824 mm²(18AWG) SHIELDED FT2 300V LL57855

Construction Drawing

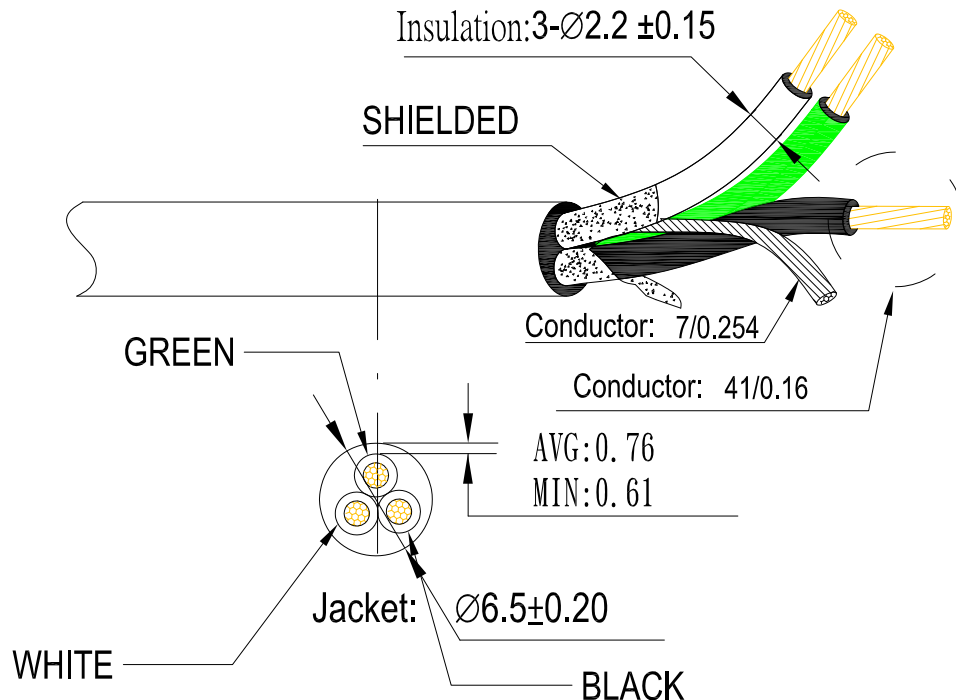

5. FLEXIBLE CORD CHARACTERISTICS:

5.1. APPEARANCE:

IT SHALL NOT SHOW ANY DAMAGE ON THE SURFACE OF THE PRODUCTS.

5-2. PHYSICAL PROPERTIES:

- (1) TENSILE STRENGTH OF INSULATION AS RECEIVED:
UNAGED: MIN. ACCEPTABLE VALUE 1500 PSI
AFTER AGING: MIN. 70% OF ORIGINAL
- (2) ELONGATION OF INSULATION AS RECEIVED:
UNAGED: MIN. ACCEPTABLE VALUE 100%
AFTER AGING: MIN. 65% OF ORIGINAL
- (3) AGING TEST TEMPERATURE REQUIRES:
 - (A) 100°C × 168H FOR 60°C PVC COMPOUND
 - (B) 136°C × 168H FOR 105°C PVC COMPOUND

5-3. HEAT SHOCK TEST:

THERE SHALL BE NO CRACK ON THE SURFACE OF SPECIMEN AFTER THE SPECIMEN WAS WOUND TO MANDRELL AND SUBJECTED TO THE TEMPERATURE AT 121°C × 1H MANDRELL DIAMETER 3.0MM.

5-4. DEFORMATION TEST:

THICKNESS OF THE SPECIMEN SHALL NOT DECREASE MORE THEN 50% OF ORIGINAL VALUE WHEN THE SPECIMEN SUBMITS TO THE TEMPERATURE OF 121°C × 1H UNDER 400G WEIGHT LOAD.

5-5. LOW TEMPERATURE TEST:

THE SPECIMEN SHALL NOT SHOW ANY CRACKS ON THE SURFACE OF THE SPECIMEN AT -20°C × 4H.

5-6. FLAME TEST:

A VERTICAL SPECIMEN SHALL NOT BE FLAMED LONGER THAN 60S FOLLOW ANY OF FIVE 15S APPLICATIONS OF THE TEST FLAME. THE PERIOD BETWEEN APPLICATIONS BEING (1)15S IF THE SPECIMEN CEASES WITHIN 15S OR (2)THE DURATION OF THE SPECIMEN FLAMING IF THE SPECIMEN FLAME PERSISTS LONGER THAN 15S. THE SPECIMEN SHALL NOT IGNITE COMBUSTIBLE MATERIALS IN ITS VICINITY OR DAMAGE MORE THAN 25% OF THE INDICATOR FLAG DURING, BETWEEN OR AFTER THE FIVE APPLICATIONS OF THE TEST FLAME.

5-7. MECHANICAL STRENGTH TEST:

THE MECHANICAL STRENGTH OF THE SPECIMEN SHALL RESULT IN NO CIRCUIT OR GROUNDING CONDUCTOR BREAKING WHEN A FORCE 150 LBF IS APPLIED ALONG THE LONGITUDINAL AXIS OF THE FINISHED CORD FOR 1 MIN.

6. CHARACTERISTICS OF POWER SUPPLY CORD

6-1. CONDUCTOR SECURENESS

THE CONNECTION BETWEEN BLADE TERMINAL AND CONDUCTOR SHALL NOT BREAK UNDER A PULL FORCE OF 20LBF (9.1KGF) FOR 1MIN.

6-2. SECURITY OF BLADES

A 20LBF WEIGHT (9.1KGF) IS APPLIED FOR 2MINUTES AT EACH BLADE IN SUCCESSION. THE RESIDUAL DISPLACEMENTS SHALL NOT EXCEED 2.4MM AFTER

REMOVAL OF WEIGHT.

6-3. STRAIN RELIEF

THE ASSEMBLY OF A CORD TO A FITTING SHALL BE CAPABLE OF WITHSTANDING A STRAIGHT PULL OF 30 LBF (13.64KGF) APPLIED BETWEEN THE FITTING AND CORD FOR 1MINUTE.

6-4. SECURITY OF INSULATION

THE INSULATION ON EACH CONDUCTOR OF THE CORD IS TO BE SLITTED PARALLEL TO THE CONDUCTORS FOR APPROX. 25MM FROM IT IS ENTRY INTO THE FITTING AND ALL STRANDS OF THE CONDUCTOR ARE TO BE SEVERED AT THE SLIT PORTION. WHILE THE FITTING IS SECURELY HELD, A PULL OF 15LBF IS TO BE APPLIED FOR A PERIOD OF 2 MINUTES AT THE FREE END OF THE CORD. NO DETACHMENT OF THE INSULATION FROM THE HOLDING MEANS, OR BARING OF THE CONDUCTOR AT THE ENTRY OF THE FITTING SHALL OCCUR.

6-5. ELECTRICAL CONTINUITY

NO OPEN OR SHORT CIRCUIT SHALL OCCUR

6-6. DIELECTRIC VOLTAGE-WITHSTAND

EACH CORD SHALL BE CAPABLE OF WITHSTANDING WITHOUT BREAKDOWN FOR A PERIOD OF 1 MINUTE, THE APPLICATION OF A 60-HZ POTENTIAL OF 1250V BETWEEN CONDUCTORS.

6-7. INSULATION RESISTANCE

IT SHALL NOT BE LESS THAN 100MEGAOHMS WITH DC500V AT 20°C.

6-8. IMPACT RESISTANCE

WHEN SUBJECTED TO THE IMPACT TEST SPECIFIED IN UL 817, EACH MOLDED-ON FITTING SHALL NOT CRACK OR BREAK TO THE EXTENT THAT IT BECOMES UNFIT FOR USE, OF LIVE PARTS BECOME EXPOSED TO UNINTENTIONAL CONTACT.

6-9. FLAME RETARDANT PROPERTIES

IT SHALL COMPLY TO UL STANDARDS (VW-1).

6-10. BLADE PULL TEST AT ELAVATED TEMPERATURE

THE PLUG SHALL BE CAPABLE OF WITHSTANDING A 10 LBF PULL WITHOUT DISPLACING EITHER BLADE FROM IT IS ORIGINAL POSITION IN THE MOLDED BODY BY MORE THAN 1.6MM.

6-11. FLEXING TEST

THE ASSEMBLY SHALL BE CAPABLE OF WITHSTANDING A MINIMUM OF 2500 CYCLES WHEN SUBJECTED TO THE FLEXING TEST SPECIFIED IN UL 817.

6-12. ABRUPT PULL TEST

A. CORDS WITH A GROUNDING CONDUCTOR-

AFTER 25 IMPACTS IN ACCORDANCE WITH UL 817, THE GROUNDING CONDUCTOR SHALL NOT BREAK BEFORE ANY OF THE LIVE CONDUCTORS OR DISCONTINUED WHEN CARRYING A CURRENT OF 40A, AT 6V TO 12V, FOR 2 MINUTES.

B. CORDS WITH TWO CONDUCTORS-

AFTER 5 IMPACTS IN ACCORDANCE WITH UL 817, OPENING OF ANY CONDUCTORS

IS NOT ALLOWED.

6-13. JACKET RETENTION TEST

THERE SHALL NOT BE ANY FILLERS, SEPARATORS, INSULATION, OR BARE CONDUCTORS VISIBLE AT THE POINT WHERE THE CORD ENTERS THE FITTING WHEN THE ABOVE TEST IS CONDUCTED IN ACCORDANCE TO UL 817.

6-14. CONTACT RESISTANCE FOR CONNECTOR

INSERT CONNECTOR INTO STANDARD RECEPTACLE AND MEASURE CONTACT RESISTANCE BY THE VOLTAGE DROP METHOD. THE RESULT SHALL NOT BE MORE THAN $20\text{m}\Omega$.

6-15. FITTING OF CONNECTOR

1. INSERTION AND WITHDRAWAL FORCE WITH STANDARD GAUGE SHALL BE BETWEEN 10-50N.
2. HOLDING FORCE ON STANDARD GAUGE OR RECEPTACLE SHALL NOT BE LESS THAN 10N.

6-16. MOISTURE RESISTANCE

SPECIMENS ARE STORED AT TEMPERATURE OF 40°C AND HUMIDITY RANGE OF 90 TO 95% FOR 48 HRS. THEN CONDENSED WATER ON SPECIMENS SHALL BE REMOVED AND SPECIMENS SHALL BE STORED AT STANDARD ATMOSPHERIC CONDITIONS FOR 30 MINS BEFORE MAKING MEASUREMENT. THESE SPECIMENS SHALL SATISFY INSULATION RESISTANCE TEST AND DIELECTRIC STRENGTH TEST.

7. PACKING:


CERTAIN QUANTITY SHALL BE PUT INTO ONE CARTON.

RoHS COMPLIANT



CUSTOMER: 研華 P/N: 1702002600 REV. . APPROVED BY:

REVISIONS		
REV.	DESCRIPTION	DATE
△	使用環保料,更新印字	2006/08/16
△	增加電流和電壓標籤	2008.05.16
△	修改纜線尺寸	2008.11.14
△	變更頭/尾安規印字,去除電流電壓標籤	2010.12.16
△	尾部改爲年週輪,增加扎線帶標註	2014/04/07
△	更新頭部印字,變更BOM表排字	2015/03/03


NOTES:

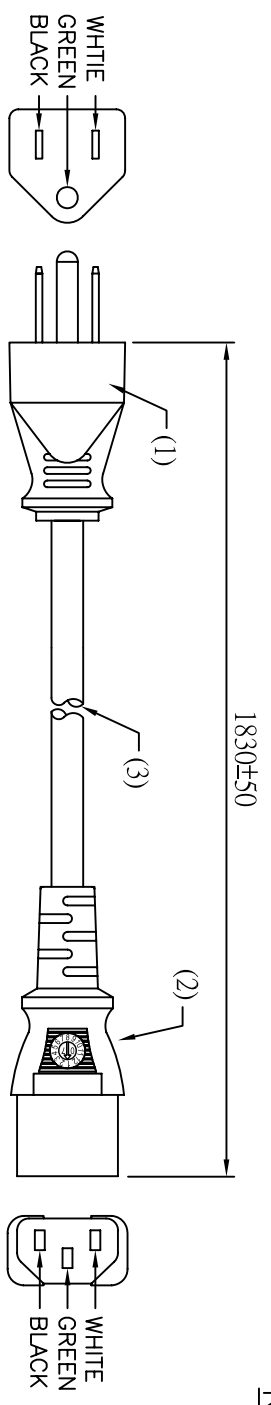

MARKING:

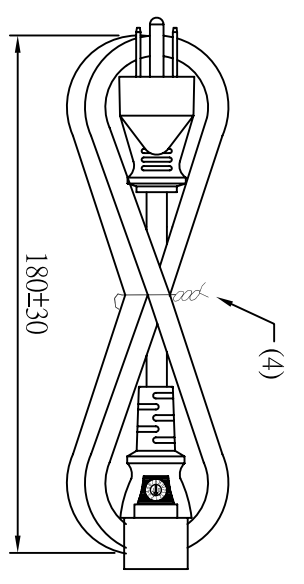

MARKING:



ITEM	DESCRIPTION	COLOR	QTY	SIGNATURE
①	WS-001 10(A) 125(V) APPROVAL: UL,CUL	BLACK	1	SAFETY ENGINEER:
②	WS-002 10(A) 125(V) APPROVAL: UL,CUL	BLACK	1	MANAGER BY:
③	SVT 18AWG 3C 105°C SHIELDED APPROVAL: UL,CSA	BLACK	1	CHECKED BY:
④	扎線帶(Cable tie)	BLACK	1	DRAWN BY: 陳金德

MARKING: △ FOR DONG-GUAN PLANT, ⊗ FOR KUN-SHAN PLANT

WELL SHIN TECHNOLOGY CO., LTD

<http://www.wellshin.com.tw>

PRODUCT NO.: 001+002-1 DATE: 2015/03/03

UNIT: mm SHEET: 1 OF 1 REV. G

DWG NO: 1494-0003

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO WELLSHIN. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF WELLSHIN IS PROHIBITED.

INDEX

Construction	United States Type	Canadian Type	Section
Jacketed Cords: Thermoplastic	<u>SVT</u> , <u>SVTO</u> , <u>SVTOO</u> , <u>SJT</u> , <u>SJTW</u> <u>SJTO</u> , <u>SJTOO</u> , <u>SJTOW</u> , <u>SJTOOW</u> , <u>ST</u> , <u>STW</u> , <u>STO</u> , <u>STOO</u> , <u>STOW</u> , <u>STOOW</u>	<u>SVT</u> , <u>SVTO</u> , <u>SVTOO</u> , <u>SJT</u> , <u>SJTW</u> , <u>SJTO</u> , <u>SJTOO</u> , <u>SJTOW</u> , <u>SJTOOW</u> , <u>ST</u> , <u>STW</u> , <u>STO</u> , <u>STOO</u> , <u>STOW</u> , <u>STOOW</u>	1
Miscellaneous Cords:	Clock Cord	N/A	2
Parallel Cords: Thermoplastic	<u>SPT-1</u> , <u>SPT-2</u> , <u>SPT-3</u> , <u>SPT-1W</u> , <u>SPT-2W</u> , <u>NISPT-1</u> , <u>NISPT-2</u>	<u>SPT-1</u> , <u>SPT-2</u> , <u>SPT-3</u>	3
Range and Dryer Cord:	SRDT	DRT	4
N/A - Not Applicable.			

All rights reserved by Well Shin.
None of the information here may be used,
duplicated, reproduced, and changed,
either partially or completely,
without prior permission of Well Shin.



CSA INTERNATIONAL

Certificate of Compliance

Certificate: 1978218 (LL 57855)

Master Contract: 173987

Project: 1978218

Date Issued: 2008/01/30

Issued to: Well Shin Technology Co., Ltd.

196 Xinhua 3rd Rd
Neihu District, T'ai-pei 114
Taiwan
Attention: Mr. Wu

The products listed below are eligible to bear the CSA Mark shown



Issued by: B. Harmer, C.E.I.

Authorized by: Nick Alfano, Operations
Manager

PRODUCTS

CLASS 5831 01 - WIRES - Flexible Cord

Type SPT-1, 300V, rated 60°C, 75°C, 90°C and 105°C, classified "FT2"

Type NISPT-1, 300V, rated 60°C, 75°C, 90°C and 105°C, classified "FT2"

Type SPT-2, 300V, rated 60°C, 75°C, 90°C and 105°C, classified "FT2"

Type NISPT-2, 300V, rated 60°C, 75°C, 90°C and 105°C, classified "FT2"

Type SPT-3, 300V, rated 60°C, 75°C, 90°C and 105°C, classified "FT2"

Type SVT, 300V, rated 60°C, 75°C, 90°C and 105°C, classified "FT2"



Certificate: 1978218 (LL 57855)

Master Contract: 173987

Project: 1978218

Date Issued: 2008/01/30

Type SVTO, 300V, rated 60°C, 75°C, 90°C and 105°C, classified “FT2”

Type SJT, 300V, rated 60°C, 75°C, 90°C and 105°C, classified “FT2”

Type SJTO, 300V, rated 60°C, 75°C, 90°C and 105°C, classified “FT2”

Type SJTW, 300V, rated 60°C, 75°C, 90°C and 105°C, classified “FT1”

Type ST, 600V, rated 60°C, 75°C, 90°C and 105°C, classified “FT2”

Type STO, 600V, rated 60°C, 75°C, 90°C and 105°C, classified “FT2”

Type STW, 600V, rated 60°C, 75°C, 90°C and 105°C, classified “FT1”

Type DRT, 300V, rated 60°C, classified “FT2”

Note:

Conductor sizes include mm² (AWG) in all applicable sizes

APPLICABLE REQUIREMENTS

CSA Standard C22.2 No. 49-06 - Flexible Cords and Cables

Electrical Certification Notice: Wire and Cable No. 21 - CSA Certification Marking on CSA Certified Flexible Cords and Cables

INDEX

ATTACHMENT PLUG:

NEMA CONFIGURATION

Cat. No.	Config.	Cord AWG	Electrical A/V.	Sec	Fig.	C-UL
WS-001	5-15	18,17,16,14,12/3	10,12,13,15,15/125	1	1	Yes
WS-001F	5-15	18,17,16,14,12/3	10,12,13,15,15/125	1	1	Yes
WS-001G	5-15	18,17,16,14,12/3	10,12,13,15,15/125	1	1	Yes
WS-001I	6-15	18,16,14,12/3	10,13,15/250	1	4	Yes
WS-001I	5-20	18,16,14,12/3	10,13,20,18/125	1	-	Yes
WS-001I	6-20	18,16,14,12/3	10,13,18,20/250	1	-	Yes
WS-001C	6-20P	18,16,14,12/3	10,13,18,20/250	1	5	Yes
WS-001C	5-20P	18,16,14,12/3	10,13,18,20/125	1	-	Yes
WS-001C	6-15P	18,16,14,12/3	10,13,15,15/250	1	-	Yes
WS-001C	5-15P	18,16,14,12/3	10,13,15,15/125	1	-	Yes
WS001D(Series)	6-20P	18,16,14,12/3	10,13,18,20/250	1	-	Yes
WS001D(Series)	5-20P	18,16,14,12/3	10,13,18,20/125	1	-	Yes
WS001D(Series)	6-15P	18,16,14,12/3	10,13,15,15/250	1	-	Yes
WS001D(Series)	5-15P	18,16,14,12/3	10,13,15,15/125	1	-	Yes
WS-001H	5-15	18,16,14,12/3	10,13,15/125	1	2	Yes
WS-001H	6-15	18,16,14,12/3	10,13,15/250	1	2	Yes
WS-001H	5-20	18,16,14,12/3	10,13,20/125	1	2	Yes
WS-001H	6-20	18,16,14,12/3	10,13,20/250	1	2	Yes
WS-001H-6	5-15	18,16,14/3	10,13,15/125	1	-	Yes
WS-001H-7	5-15	18,16,14/3	10,13,15	1	26	Yes
WS-001H-8	5-15	18,16,14/3	10,13,15	1	28	Yes
WS-001H-10	5-15	18,16,14/3	-	1	29	Yes
WS-001M	5-15P	18,14,12/3	10,15,15/125	1	6	Yes
WS-001M	5-20P	18,14,12/3	10,18,20/125	1	6	Yes
WS-001M	6-15P	18,14,12/3	10,15,15/250	1	6	Yes
WS-001M	6-20P	18,14,12/3	10,18,20/250	1	6	Yes
WS-004	1-15	18,16/2	10,13/125	1	7	Yes
WS-004A	1-15	18,17,16,14/2	10,12,13,15/125	1	3	Yes
WS-004C	1-15	18,17,16,14/2	10,12,13,15/125	1	3	Yes
WS-004C-3	1-15	18,17,16,14/2	10,12,13,15/125	1	3	Yes
WS-004-L	1-15	18,17,16,14/2	10,12,13,15/125	1	22	Yes
WS-004-R	1-15	18	10/125	1	33	Yes
WS-004-S	1-15	18/2	7/125	1	34	Yes
WS-004-Q	1-15	18,16,14/2	10,13,15/125	1	35	Yes
WS-117	L5-20P	14,12,10/3	18,20,20/125	1	8	Yes
WS-117-2	L5-20P	12, 10	20, 20/125	1	-	Yes
WS-118	L5-15P	16,14,12,10/3	13,15,15,15/125	1	9	Yes
WS-119	L6-20P	16,14,12,10,8/3	13,18,20,20,20/250	1	9	Yes
WS-119-2	L6-20P	12, 10	20, 20/250	1	-	Yes
WS-120	L6-30P	16,14,12,10,8/3	13,18,25,30,30/250	1	9	Yes
WS-120-2	L6-30P	12, 10	25, 30/250	1	-	Yes
WS-121	L5-30P	16,14,12,10,8/3	13,18,25,30,30/125	1	9	Yes
WS-121-2	L5-30P	12, 10	25, 30/125	1	-	Yes
WS-122	L14-30P	16,14,12,10,8/4	10,15,20,25,30/250	1	9	Yes
WS-122-2	L14-30P	12, 10	25, 30/250	1	-	Yes
WS-123	L6-15P	16,14,12,10,8/3	13,15,15,15,15/250	1	9	Yes
WS-129	L14-20P	16,14,12,10,8/4	10,15,20,20,20/125,250	1	9	Yes
WS-129-2	L14-20P	12, 10	20, 20/250	1	-	Yes
WS-130	L1520PPH	16,14,12,10,8/4	10,15,20,20,20/250	1	9	Yes
WS-130-2	L15-20P	12, 10	20,20/250,3-	1	-	Yes
WS-131	L15-30P	16,14,12,10,8/4	10,15,20,30,30/250	1	9	Yes
WS-131-2	L1530PPH	12, 10	25,30/250,3-	1	-	Yes
WS-225	L21-30P	10	30A, 120/208 V, 3 PH	1	30	Yes
WS-226	L7-15P	18,16,14,12,10/3	10,13,15,15,15/277	1	25	Yes
WS-234	L21-20	12,10/5	20.20/208,250	1	-	Yes
WS-004E	1-15(EMI)		18/27/125	1	10	Yes

CORD CONNECTOR:

NEMA CONFIGURATION

Cat. No	Config	Cord AWG	Electrical A/V	Sec.	FIG.	C-UL
WS-022	5-15	16,14/3	13,15/125	2	3	Yes
WS-022(A.C.1)	5-15	14,12/3	15/125	2	3B	Yes
WS-022-5	5-15	18, 16, 14/3	10, 13, 15/125V	2	3A	Yes
WS-108	L5-15	14,12,10/3	15,15,15/125	2	22	Yes
WS-109	1-15	16/2	13/125	2	17	Yes
WS-111	L5-20	14,12,10/3	18,20,20/125	2	23	Yes
WS-111-2	L5-20	12, 10	20, 20/125	2		Yes
WS-113	L5-30	14,12,10/3	18,25,30/125	2	24	Yes
WS-113-2	L5-30	12, 10	25, 30/125	2		Yes
WS-116-3	5-15	18,16,14,12/3	10,13,15,15/125	2	16	Yes
WS-116-5	5-15	18,16,14,12/3	10,13,15,15/125	2	31,32	Yes
WS-170	5-20	16,14,12/3	*13,15,20/125	2	10	Yes
WS-170-1	5-20	16,14,12/3	13,15,20/125	2	11	Yes
WS-171	6-20	16,14,12/3	*13,15,20/250	2	-	Yes
WS-172	6-15	16,14,12/3	13,15,15/250	2	-	Yes
WS-173	L6-15	14,12,10/3	15,15,15/250	2	25	Yes
WS-174	L6-20	14,12,10/3	18, 20, 20/250	2	18	Yes
WS-174-2	L6-20	12, 10	20, 20/250	2		Yes
WS-175	L6-30	14,12,10/3	18, 25, 30/250	2	19	Yes
WS-175-2	L6-30	12, 10	25, 30/250	2		Yes
WS-176	L14-20	14,12,10/4	15,20,20/125,250	2	20	Yes
WS-176-2	L14-20	12, 10	20, 20/125,250	2		Yes
WS-177	L14-30	14,12,10/4	15,20,30/125,250	2	21	Yes
WS-177-2	L14-30	12, 10	20, 30/125,250	2		Yes
WS-178	L15-20	14,12,10/4	18,20,20/250	2	26	Yes
WS-178-2	L15-20	12, 10	20, 20/250, 3-PH	2		Yes
WS-179	L15-30	14,12,10/4	18,25,30/250	2	27	Yes
WS-179-2	L15-30	12, 10	25, 30/250, 3-PH	2		Yes
WS-241	5-15	16,14/3	13,15/125	2	12	Yes
WS-026-1	1-15	16,14/2	13,15/125	2	13	Yes
WS-026-3	1-15	16,14/2	13,15/125	2	14	Yes
WS-026-5	1-15	16,14/2	13,15/125	2	15	Yes
WS-026-6	1-15	18, 16, 14/2	10, 13, 15/125	2	15A	Yes
WS-116-9A	5-20	14,12/4	18,20/125	2	38	Yes
WS-116-9	5-15	14,12/4	15,15/125	2	39	Yes
WS-116-9B	5-20	12,10/4	20,20/125	2	40	Yes

IEC CONFIGURATION

Cat. No.	Config	Cord AWG	A/V	Sec.	FIG.	C-UL
WS-002	C13	18,16,14,12/3	10,13,15,15/125,250	2	1	Yes
WS-002-2	C13	18,16,14,12/3	10,13,15,15/125,250	2	1	No
WS-002A-R	C13	18,16,14/3	10,13,15/125,250	2	1	Yes
WS-002A-L	C13	18,16,14/3	10,13,15/125,250	2	1	Yes
WS-002B	C13	18,16,14/3	10,13,15/125,250	2	1	Yes
WS-002C	C15	18,16,14/3	10,13,15/125,250	2	1	Yes
WS-002C-1	C15	18,16,14/3	10,13,15/125,250	2	-	Yes
WS-002C-2	C15	18,16,14/3	10,13,15/125,250	2	-	Yes
WS-002C-5	C15	18,16,14/3	10,13,15/125,250	2	-	Yes
WS-002C-0	C15	18,16,14/3	10,13,15/125,250	2	1-1	Yes