

## Pin strip - PST 1,3/ 6-H-5,0 - 1705504

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Pin strip, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 6, pitch: 5 mm, color: black, contact surface: Tin, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 6.8 mm, The maximum current depends on the plug used. The lower of the two current values apply for plug and pin strip. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.



The figure shows a 10-position version of the product

### Your advantages

- ✓ Suitable for wave and reflow soldering processes
- ✓ Optimum pin geometry for all COMBICON pin strip connectors

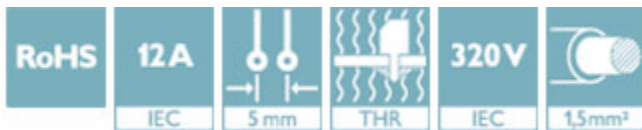

### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| Minimum order quantity               | 100 pc  |
| GTIN                                 | <br>4 046356 095013 |
| GTIN                                 | 4046356095013   |
| Weight per Piece (excluding packing) | 1.500 g   |
| Custom tariff number                 | 85366930  |
| Country of origin                    | Slovakia  |

### Technical data

#### Dimensions

|              |         |
|--------------|---------|
| Length [ l ] | 12.5 mm |
| Width        | 30 mm   |
| Pitch        | 5 mm    |
| Dimension a  | 25 mm   |
| Width [ w ]  | 30 mm   |

# Pin strip - PST 1,3/ 6-H-5,0 - 1705504

## Technical data

### Dimensions

|                          |          |
|--------------------------|----------|
| Height [ h ]             | 9.6 mm   |
| Height                   | 2.8 mm   |
| Length of the solder pin | 6.8 mm   |
| Pin dimensions           | ø 1.3 mm |
| Length                   | 12.5 mm  |

### General

|  |                                 |
|--|---------------------------------|
| Range of articles                      | PST 1,3/..-H                    |
| Insulating material group              | IIIa                            |
| Rated surge voltage (III/3)            | 4 kV                            |
| Rated surge voltage (III/2)            | 4 kV                            |
| Rated surge voltage (II/2)             | 4 kV                            |
| Rated voltage (III/3)                  | 250 V                           |
| Rated voltage (III/2)                  | 320 V                           |
| Rated voltage (II/2)                   | 400 V                           |
| Connection in acc. with standard       | EN-VDE                          |
| Nominal current I <sub>N</sub>         | 12 A (depends on the plug used) |
| Maximum load current                   | 12 A (depends on the plug used) |
| Insulating material                    | PA                              |
| Flammability rating according to UL 94 | V0                              |
| Color                                  | black                           |
| Number of positions                    | 6                               |

### Standards and Regulations

|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CUL    |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440402 |
| eCl@ss 4.0    | 27260700 |
| eCl@ss 4.1    | 27260700 |
| eCl@ss 5.0    | 27260700 |

## Pin strip - PST 1,3/ 6-H-5,0 - 1705504

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |
| ETIM 6.0 | EC002637 |
| ETIM 7.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 34131203 |
| UNSPSC 12.01  | 39121432 |
| UNSPSC 13.2   | 39121409 |
| UNSPSC 18.0   | 39121409 |
| UNSPSC 19.0   | 39121409 |
| UNSPSC 20.0   | 39121409 |
| UNSPSC 21.0   | 39121409 |

### Approvals

#### Approvals

---

Approvals

EAC / cULus Recognized

---

Ex Approvals

---

#### Approval details

# Pin strip - PST 1,3/ 6-H-5,0 - 1705504

## Approvals

|     |  |         |
|-----|--|---------|
| EAC |  | B.01687 |
|-----|--|---------|

|                    |       |   |                 |
|--------------------|-------|---|-----------------|
| cULus Recognized   |       | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20030211 |
|                    | B     | D   |                 |
| Nominal voltage UN | 300 V | 300 V   |                 |
| Nominal current IN | 16 A  | 10 A  |                 |

## Accessories

### Additional products

Plug - PTDA 2,5/ 6-PH-5,0 - 1725549



PCB connector, nominal current: 14 A, rated voltage (III/2): 400 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 6, pitch: 5 mm, connection method: Push-in spring connection, color: green, contact surface: Tin

PCB terminal block - PT 1,5/ 6-PH-5,0 - 1755622



PCB connector, nominal current: 10 A, rated voltage (III/2): 400 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 6, pitch: 5 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Tin

PCB terminal block - PT 1,5/ 6-PH-5,0 CLIP - 1755774



PCB connector, nominal current: 10 A, rated voltage (III/2): 400 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 6, pitch: 5 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Tin

## Pin strip - PST 1,3/ 6-H-5,0 - 1705504

### Accessories

Plug - PT 1,5/ 6-PVH-5,0 - 1934900

PCB connector, nominal current: 12 A, rated voltage (III/2): 400 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 6, pitch: 5 mm, connection method: Screw connection with wire protector, color: green, contact surface: Tin

