

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1721850011](#)
Status: **Active**
Overview: EXTreme EnergetiC High-Current Connector System
Description: EXTreme EnergetiC Modular Right-Angle Plug Assembly, 2 Power Circuits with Solder Tail Mounting, without Guide

Documents:

3D Model (PDF)	Test Summary 1721850000-TS-000 (PDF)
3D Model	Test Summary 1721850001-TS-000 (PDF)
Drawing (PDF)	Datasheet (PDF)
Product Specification PS-172185-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)
Packaging Specification PK-172185-0003-001 (PDF)	

Agency Certification

CSA	LR19980
UL	E29179

General


Product Family	PCB Headers
Series	172185
Application	Board-to-Board, Power
Overview	EXTreme EnergetiC High-Current Connector System
Product Name	EXTreme EnergetiC
UPC	889056260725

Physical

(p)ower-(s)ignal Configuration	2p - 0s
Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	15.378/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.71mm
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	7.65mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	100.0A
-------------------------------	--------

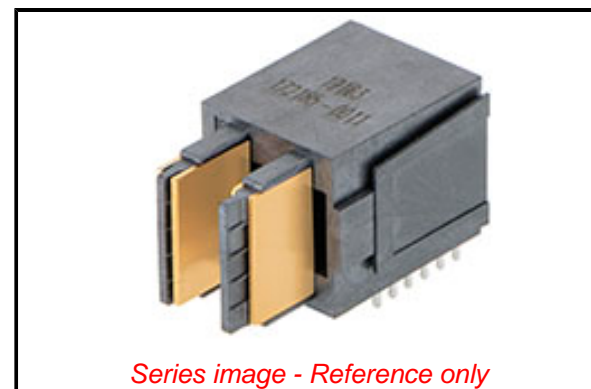

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[172185 Series](#)

Mates With

EXTreme EnergetiC PCB Receptacle
[1721860011](#) , [2049000011](#) , [2049000017](#)

Voltage - Maximum 600V AC/DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 010
Lead-free Process Capability SMC&WAVE
Max. Cycles at Max. Process Temperature 003
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Packaging Specification PK-172185-0003-001
Product Specification PS-172185-0001-001
Sales Drawing SD-172185-0009-001
Test Summary 1721850000-TS-000, 1721850001-TS-000

This document was generated on 12/15/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION