

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



PCB terminal block, nominal current: 23 A, nominal cross section: 2.5 mm², number of potentials: 9, number of rows: 1, number of positions per row: 9, product range: SPT 2,5/..-H-EX, pitch: 5 mm, connection method: Push-in spring connection, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Pin layout: Linear pinning, Solder pin [P]: 2.5 mm, number of solder pins per potential: 2, type of packaging: packed in cardboard

Your advantages

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Clamping space opened by means of fixed screwdriver enables convenient conductor connection
- Operation and conductor connection from one direction enable integration into front of device
- Satisfies the more stringent safety requirements of "Ex eb" protection according to IEC 60079-7 for potentially explosive areas
- Two solder pins reduce the mechanical strain on the soldering spots

Commercial Data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1732454 |
| Packing unit | 50 pc |
| Minimum order quantity | 1 pc |
| Note | Made to Order (non-returnable) |
| Product Key | AAMBFA |
| Catalog Page | Page 163 (C-1-2013) |
| GTIN | 4046356282994 |
| Weight per Piece (including packing) | 11.57 g |
| Weight per Piece (excluding packing) | 10.9 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Technical Data

Product properties

| | |
|---------------------------|--------------------------------|
| Product line | COMBICON Terminals M |
| Product type | Printed circuit board terminal |
| Number of positions | 9 |
| Pitch | 5 mm |
| Number of connections | 9 |
| Number of rows | 1 |
| Number of potentials | 9 |
| Pin layout | Linear pinning |
| Solder pins per potential | 2 |

Electrical properties

| | |
|---|--------------------------|
| Nominal current I_N | 23 A |
| Nominal voltage U_N | 176 V |
| Rated current / conductor cross section | 23 A/2.5 mm ² |
| Degree of pollution | 3 |
| Rated voltage (III/3) | 176 V |

Ex data

Ex approval

| | |
|---------------------------------|-----------------------------|
| Identification | 0344□ II 2GD / Ex eb IIC Gb |
| EU-type examination certificate | KEMA 07ATEX0193 U |
| IECEx certificate | IECEx KEM 07.0057 U |

Connection data

Connection technology

| | |
|-----------------------|---------------------|
| Nominal cross section | 2.5 mm ² |
|-----------------------|---------------------|

Conductor connection

| | |
|---|--|
| Connection method | Push-in spring connection |
| Conductor cross section solid | 0.2 mm ² ... 4 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 24 ... 14 |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm ² ... 2.5 mm ² (Stripping length 8 mm) |
| Conductor cross section, flexible, with ferrule, with plastic sleeve | 0.25 mm ² ... 1.5 mm ² (Stripping length 8 mm) |
| Stripping length | 10 mm |

Mounting

| | |
|---------------|----------------|
| Mounting type | Wave soldering |
| Pin layout | Linear pinning |

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Material specifications

Material data - contact

| | |
|--|--|
| Note | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material | Cu alloy |
| Surface characteristics | hot-dip tin-plated |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn) |
| Metal surface soldering area (top layer) | Tin (4 - 8 µm Sn) |

Material data - housing

| | |
|---|--------------|
| Color (Housing) | green (6021) |
| Insulating material | PA |
| Insulating material group | I |
| CTI according to IEC 60112 | 600 |
| Flammability rating according to UL 94 | V0 |
| Glow wire flammability index GWFI according to EN 60695-2-12 | 850 |
| Glow wire ignition temperature GWIT according to EN 60695-2-13 | 775 |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

Material data – actuating element

| | |
|----------|----|
| Color () | () |
|----------|----|

Notes

| | |
|---------------------|--|
| Note on application | Rated insulation voltage with pitch spacer RZ-SPT 2,5-2,5: 275 V RZ-SPT 2,5-5,0: 440 V |
|---------------------|--|

Dimensions

| | |
|-----------------------|---------|
| Dimensional drawing | |
| Pitch | 5 mm |
| Width [w] | 46.4 mm |
| Height [h] | 16 mm |
| Length [l] | 14.4 mm |
| Installed height | 13.5 mm |
| Solder pin length [P] | 2.5 mm |

PCB design

| | |
|-------------|--------|
| Pin spacing | 8.2 mm |
|-------------|--------|

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Mechanical tests

Connection test

| | |
|---------------|-----------------------|
| Specification | IEC 60998-2-2:2002-12 |
| Result | Test passed |

Test for conductor damage and slackening

| | |
|---------------|-----------------------|
| Specification | IEC 60998-2-2:2002-12 |
| Result | Test passed |

Pull-out test

| | |
|---|---|
| Specification | IEC 60998-2-2:2002-12 |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.2 mm ² / solid / > 10 N |
| | 0.2 mm ² / flexible / > 10 N |
| | 4 mm ² / solid / > 60 N |
| | 2.5 mm ² / flexible / > 50 N |

Electrical tests

Temperature-rise test

| | |
|-----------------------------------|--------------------------------|
| Specification | IEC 60998-2-1:2002-12 |
| Requirement temperature-rise test | Increase in temperature ≤ 45 K |

Insulation resistance

| | |
|--|---------------------|
| Specification | IEC 60998-1:2002-12 |
| Insulation resistance, neighboring positions | 10 ⁹ Ω |

Air clearances and creepage distances |

| | |
|--|---------|
| Insulating material group | I |
| Comparative tracking index (IEC 60112) | CTI 600 |
| Rated insulation voltage (III/3) | 176 V |
| minimum clearance value - non-homogenous field (III/3) | 3 mm |
| minimum creepage distance (III/3) | 3.2 mm |
| minimum clearance value - non-homogenous field (III/2) | 3 mm |
| minimum creepage distance (III/2) | 3 mm |
| minimum clearance value - non-homogenous field (II/2) | 3 mm |
| minimum creepage distance (II/2) | 3.2 mm |

Environmental and real-life conditions

Vibration test

| | |
|------------------------|-----------------------------|
| Specification | IEC 60068-2-6:1995-03 |
| Frequency | 10 - 150 - 10 Hz |
| Sweep speed | 1 octave/min |
| Amplitude | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed | 5g (60.1 Hz ... 150 Hz) |
| Test duration per axis | 2.5 h |

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Glow-wire test

| | |
|------------------|---------------------|
| Specification | IEC 60998-1:2002-12 |
| Temperature | 850 °C |
| Time of exposure | 5 s |

Ambient conditions

| | |
|---|-------------------|
| Ambient temperature (operation) | -50 °C ... 110 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Relative humidity (storage/transport) | 30 % ... 70 % |
| Ambient temperature (assembly) | -5 °C ... 100 °C |

Packaging specifications

| | |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|

PCB terminal block - SPT 2,5/ 9-H-5,0-EX




1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Drawings

Diagram

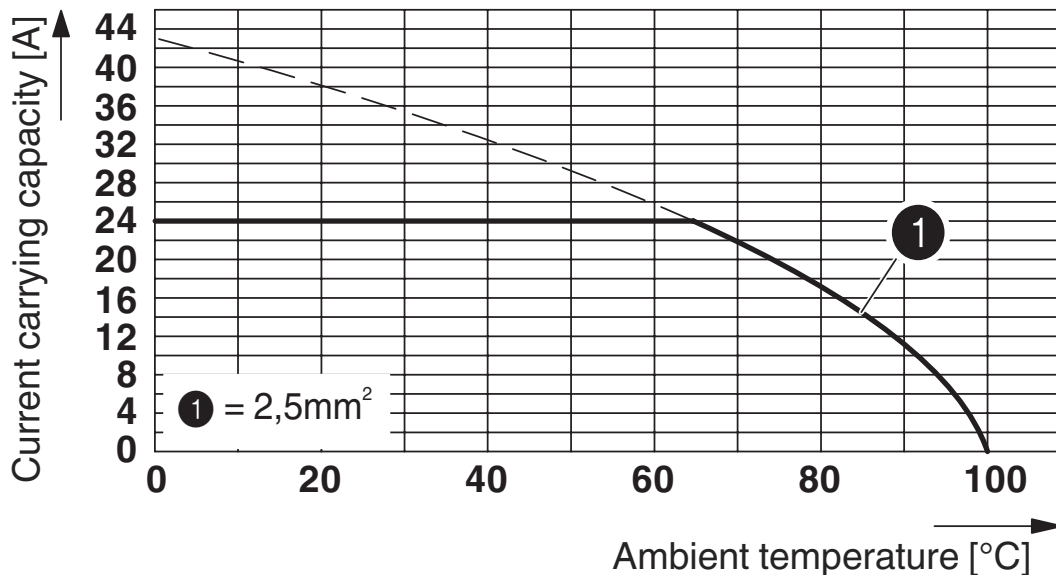


Type: SPT 2,5/5-H-5,0

Test following DIN EN 60512-5-2:2003-01

Reduction factor = 1

No. of positions: 5

Drilling plan/solder pad geometry

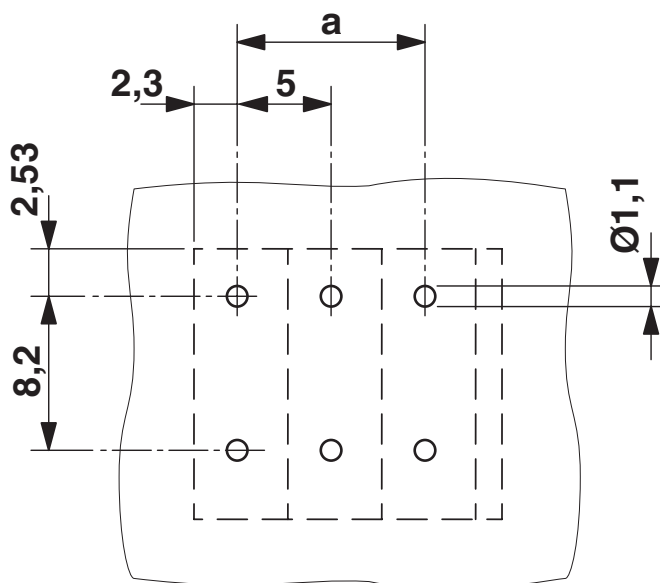


PCB terminal block - SPT 2,5/ 9-H-5,0-EX




1732454


<https://www.phoenixcontact.com/pc/products/1732454>

Approvals

|  cULus Recognized Approval ID: E60425-20061129 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal Voltage U_N | Nominal Current I_N | Cross Section AWG | Cross Section mm^2 |
| Use group B | 300 V | 20 A | 24 - 12 | - |
| Use group D | 150 V | 15 A | 24 - 12 | - |
| Use group C | 150 V | 20 A | 24 - 12 | - |

|  ATEX Approval ID: KEMA 07ATEX0193 U | |
|---|--|
|---|--|

|  IECEX Approval ID: IECEX KEM 07.0057U | |
|---|--|
|---|--|

|  EAC Ex Approval ID: B.00065/19 | |
|--|--|
|--|--|

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-9.0 | 27440401 |
| ECLASS-10.0.1 | 27440401 |
| ECLASS-11.0 | 27460101 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002643 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

PCB terminal block - SPT 2,5/ 9-H-5,0-EX



1732454

<https://www.phoenixcontact.com/pc/products/1732454>

Accessories

Screwdriver

Screwdriver - SZF 1-0,6X3,5 - 1204517

<https://www.phoenixcontact.com/pc/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com