

WISE-4210

Industrial Proprietary LPWAN (SUB-G) Wireless I/O Module



Introduction

LPWAN, created for machine-to-machine (M2M) and Internet of things (IoT) networks, is not a single technology, but a variety of low-power, wide area network technologies. Compared with traditional mobile network, LPWAN is known as lower cost with higher power efficiency. WISE-4210 series is the proprietary LPWAN which provides better connection compare with traditional 2.4G WiFi, WISE-4210 series is helpful of eliminating network interference.

Additionally, WISE-4210 utilize a LPWAN(low-power, wide-area networks) wireless interface, which has a kilometer-long communication distance and battery power. The features of LPWAN make WISE modules ideal solutions for energy and environment monitoring.

Reduced Interference and Extended Communication Range

Compared with Wi-Fi, Bluetooth, Zigbee, or other 2.4GHz wireless interfae, a sub-GHz interface can reduce interference at sites. Moreover, Sub-GHz is a type of LPWAN designed for long-range communications. Under the same power consumption, sub-GHz offers a longer communication range with low data rate than other 2.4 GHz. technologies.

Powered by a 3.6V AA Lithium Battery

The low power consumption of sub-GHz enables the sensor node to be powered by a battery. With a 3.6V AA Lithium battery, the sensor node can maintain communication at a distance of 5 km for up to 5 years, thereby eliminating the need to recharge or change batteries.



Star Topology

Star topology, also known as star network, is the most common network setup. In star topology, every node connects to a central network device which means WISE-4210-S200 series nodes acts as clients should be connected with WISE-4210-AP. In this configuration, user can organize their own network with 64 nodes paired. Data on a star network pass through WISE-4210-AP before continuing to its destination. WISE-4210-AP with a LAN cable manages and controls most of all functions of the network.

Features


- Proprietary LPWAN with using sub-1GHz wireless frequency
- Battery power for 5 years with 3 x 3.6V AA batteries
- Up to 5 km communication range in open space
- Longer communication range than 2.4GHz
- Better penetration through concrete and steel than 2.4GHz
- Less interference than 2.4GHz spectrum
- Application-ready I/O combination with modularization design

MQTT and RESTful API IoT Protocol Support

IoT Wireless sensor nodes are designed for not only automation applications but also IoT applications that may use MQTT or RESTful web API IoT protocols for cloud integrations.

Azure IoT Hub Support

To provide a complete IoT sensing solution, the WISE-4210 series goes beyond being a wireless communication interface for sensors—it also provides cloud connectivity for additional user applications. With support for HTTPS and integrated APIs for Azure IoT Hub, the WISE-4210 series can automatically push data to the cloud without requiring an IoT gateway.

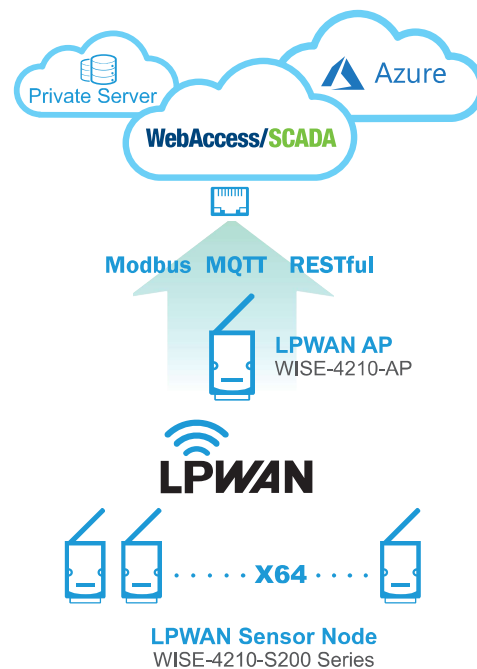

Common Specification

WISE-4210

- Frequency Band NA915: 923MHz (920.60-924.60), BW: 400kHz
EU868: 868MHz (865.00-869.00), BW: 400kHz
UN433: 433MHz (433.05-434.55), BW: 300kHz
- Antenna Gain 902-928MHz: 1.33 dBi
863-870MHz: 2.19 dBi
- Data Rate 625bps, 50kbps
- Outdoor Range 625bps: 5 km with line of sight
50kbps: 2 km with line of sight
- Topology Star
- Network Capacity 64 clients

General

- Power Input AP: 10 ~ 50 V_{DC}
Sensor Node: 3 x AA, 3.6V Lithium Battery or 10 ~ 50 V_{DC}
- Battery Life 625bps: 5 years with 10 minute update rate @ 25°C
50kbps: 5 years with 1 minute update rate @ 25°C
- Configuration Interface AP: LAN port
Sensor Node: Micro-B USB
- LED Indicator Status, Error, Tx, Rx, Battery/Signal Level
- Mounting DIN 35 rail, wall, pole and stack
- Dimension (W x H x D) 70 x 102 x 38 mm
- Certification CE, FCC, IC, NCC, TELEC

Environment

- Operating Temperature -25 ~ 70°C
- Operating Humidity 5 ~ 95% RH
- Storage Temperature -40 ~ 85°C
- Storage Humidity 0 ~ 95% RH

WISE-4210-AP (Access Point)

- Data Rate 625 bps, 2.5k bps, 5k bps, 50k bps.
- Ethernet RJ-45 (for configuration and data query)
- RS-485 Data+, Data- (for query node data)
- Messaging Protocol Modbus/TCP, Modbus/RTU, REST, MQTT
- Application Protocol HTTP, HTTPS, SNTp, DHCP
- Transport Protocol TCP, UDP
- Supports RESTful Web API in JSON format
- Supports Web Server in HTML5

WISE-4210-S231 (Built-in Temperature & Humidity Sensor)

Temperature Sensor

- Operating Range -25°C ~ 70°C (-13°F ~ 157.9°F)
- Resolution 0.1 (°C/°F/K)
- Accuracy ±1.0°C (±1.8°F) (vertical installation)

Humidity Sensor

- Operating Range 10 ~ 90% RH
- Resolution 0.1% RH
- Accuracy ±4% RH @ for 0%-50% RH
±6% RH @ 50%-60% RH
±10% RH @ 60%-90% RH

WISE-S214 (4AI/4DI)

Analog Input

- Channels 4
- Resolution 16bits Bipolar
15bits Unipolar
- Sampling Rate 1Hz (per Channel) with 50/60Hz Rejection (Power Saving Mode)
10Hz (Total) with 50/60Hz Rejection (Normal Mode)
- Accuracy ±0.1% for Voltage Input
±0.2% for Current Input
- Input Range 0-150mV, 0-500mV, 0-1V, 0-5V, 0-10V, ±150mV, ±500mV, ±1V, ±5V,
±10V, 0-20mA, ±20mA, 4-20mA
- Input Impedance >1MΩ (Voltage)
- Isolated voltage 3kVrms
- Support Data Scaling and Averaging

Digital Input

- Channels 4 (Dry Contact)
- Supports 32-bit counter input function (maximum signal frequency 200Hz)
- Supports keep/discard counter value on power-off
- Support inverted digital input status

WISE-S250 (6DI, 2DO & 1RS-485)

Digital Input

- Channels 6 (Dry Contact)
- Supports 3kHz Frequency Input

Digital Output (Sink Type)

- Channels 2
- Output Current 100 mA
At 0 → 1: 100 us
At 1 → 0: 100 us
(for Resistive Load)
- Supports Pules Output 5 kHz
- Max. Load Voltage 30V

Serial Port

- Port Number 1
- Type RS-485
- Data Bits 7, 8
- Stop Bits 1, 2
- Parity None, Odd, Even
- Baud Rate (bps) 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- Protocol Modbus/RTU (Total 64 addresses by 30 max. instructions)

WISE-S251 (6DI/1RS-485)

Digital Input

- Channels 6 (Dry Contact)
- Supports 32-bit counter input function (maximum signal frequency 200Hz)
- Supports keep/discard counter value on power-off
- Support inverted digital input status

Serial Port

- Port Number 1
- Type RS-485
- Data Bits 7, 8
- Stop Bits 1, 2
- Parity None, Odd, Even
- Baud Rate (bps) 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- Protocol Modbus/RTU (Total 32 address by max. 8 instructions)

Ordering Information

WISE-4210 Access Point

- WISE-4210-APNA LPWAN Wireless to Ethernet AP - NA915/EU868
- WISE-4210-APUA LPWAN Wireless to Ethernet AP - UN433

WISE-4210 Node

- WISE-4210-NA Proprietary LPWAN SUB-G Wireless I/O Module - NA915/EU868
- WISE-4210-UA Proprietary LPWAN SUB-G Wireless I/O Module - UN433
- WISE-4210-S231-NA LPWAN IoT WSN Temp & RH Sensor - NA902/EU868
- WISE-4210-S231-UA LPWAN IoT WSN Temp & RH Sensor - UN433

WISE-S200 I/O Module

- WISE-S214-A 4AI/4DI
- WISE-S250-A 6DI, 2DO & 1RS-485
- WISE-S251-A 6DI & 1RS-485

* Power saving is not for downlink mode.

Accessories

- 1760002647-01 Bat.Cylindrical 3.6V/2500mAh AA Li/SOC12
- 1750008836-01* 863-870MHz Dipole Antenna for WISE-4210
- 1750008837-01* 902-928MHz Dipole Antenna for WISE-4210

* AS923/EU868 version of WISE-4210 needs to order antenna separately

