

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



PCB headers, nominal cross section: 1.5 mm<sup>2</sup>, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Male connector, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: MCV 1,5/..-GF-THR, pitch: 3.5 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.6 mm, number of solder pins per potential: 1, plug-in system: COMBICON MC 1,5, Pin connector pattern alignment: Standard, locking: Screw locking, mounting: Threaded flange, type of packaging: packed in cardboard, For user information and design recommendations for through-hole reflow technology, go to: Downloads

## Your advantages

- Designed for integration into the SMT soldering process
- Screwable flange for superior mechanical stability
- Vertical connection enables multi-row arrangement on the PCB
- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

## Commercial Data

|                                      |                           |
|--------------------------------------|---------------------------|
| Item number                          | 1779064                   |
| Packing unit                         | 100 pc                    |
| Minimum order quantity               | 100 pc                    |
| Sales Key                            | E1 - Leiterplattenanschl. |
| Product Key                          | AABTAD                    |
| Catalog Page                         | Page 217 (C-1-2013)       |
| GTIN                                 | 4046356532242             |
| Weight per Piece (including packing) | 1,626 g                   |
| Weight per Piece (excluding packing) | 1,626 g                   |
| Customs tariff number                | 85366930                  |
| Country of origin                    | DE                        |

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

## Technical Data

### Product properties

|                           |  |
|---------------------------|--|
| Type                      | Component suitable for through hole reflow |
| Product line              | COMBICON Connectors S                      |
| Product type              | PCB headers                                |
| Product family            | MCV 1,5/...-GF-THR                         |
| Number of positions       | 2  |
| Pitch                     | 3.5 mm                                     |
| Number of connections     | 2  |
| Number of rows            | 1  |
| Mounting flange           | Threaded flange                            |
| Number of potentials      | 2  |
| Pin layout                | Linear pinning                             |
| Solder pins per potential | 1  |

### Electrical properties

|                             |                |
|-----------------------------|----------------|
| Nominal current $I_N$       | 8 A            |
| Nominal voltage $U_N$       | 160 V          |
| Degree of pollution         | 3              |
| Contact resistance          | 1.2 m $\Omega$ |
| Rated voltage (III/3)       | 160 V          |
| Rated surge voltage (III/3) | 2.5 kV         |
| Rated voltage (III/2)       | 160 V          |
| Rated surge voltage (III/2) | 2.5 kV         |
|                             | 250 V          |
| Rated surge voltage (II/2)  | 2.5 kV         |

### Mounting

|               |                |
|---------------|----------------|
| Mounting type | THR soldering  |
| Pin layout    | Linear pinning |

### Flange

|                   |        |
|-------------------|--------|
| Tightening torque | 0.3 Nm |
|-------------------|--------|

### Processing notes

|                                  |                       |
|----------------------------------|-----------------------|
| Process                          | Reflow/wave soldering |
| Moisture Sensitive Level         | MSL 1                 |
| Classification temperature $T_c$ | 260 °C                |
| Solder cycles in the reflow      | 3                     |

### Material specifications

#### Material data - contact

|      |  |
|------|--|
| Note | WEEE/RoHS-compliant, free of whiskers according to IEC |
|------|--|

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

|   |                           |
|---|---------------------------|
|   | 60068-2-82/JEDEC JESD 201 |
| Contact material                            | Cu alloy                  |
| Surface characteristics                     | Tin-plated                |
| Metal surface contact area (top layer)      | Tin (3 - 5 µm Sn)         |
| Metal surface contact area (middle layer)   | Nickel (1.3 - 3 µm Ni)    |
| Metal surface soldering area (top layer)    | Tin (3 - 5 µm Sn)         |
| Metal surface soldering area (middle layer) | Nickel (1.3 - 3 µm Ni)    |

## Material data - housing

|  |              |
|--|--------------|
| Color (Housing)                        | black (9005) |
| Insulating material                    | LCP          |
| Insulating material group              | IIIa         |
| CTI according to IEC 60112             | 175          |
| Flammability rating according to UL 94 | V0           |

## Material data – actuating element

|          |    |
|----------|----|
| Color () | () |
|----------|----|

## Dimensions

|                       |         |
|-----------------------|---------|
| Dimensional drawing   |         |
| Pitch                 | 3.5 mm  |
| Width [w]             | 17.3 mm |
| Height [h]            | 11.8 mm |
| Length [l]            | 6.9 mm  |
| Installed height      | 9.2 mm  |
| Solder pin length [P] | 2.6 mm  |

## Mechanical tests

### Test for conductor damage and slackening

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Pull-out test

|   |  |
|---|--|
| Specification   | IEC 60999-1:1999-11                      |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.14 mm <sup>2</sup> / solid / > 10 N    |
|   | 0.14 mm <sup>2</sup> / flexible / > 10 N |
|   | 0.2 mm <sup>2</sup> / solid / > 10 N     |
|   | 0.2 mm <sup>2</sup> / flexible / > 10 N  |
|   | 1.5 mm <sup>2</sup> / solid / > 40 N     |
|   | 1.5 mm <sup>2</sup> / flexible / > 40 N  |

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

## Insertion and withdrawal forces

|                                     |             |
|-------------------------------------|-------------|
| Result                              | Test passed |
| No. of cycles                       | 25          |
| Insertion strength per pos. approx. | 6 N         |
| Withdraw strength per pos. approx.  | 4 N         |

## Torque test

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
|---------------|---------------------|

## Contact holder in insert

|   |                        |
|---|------------------------|
| Specification                               | IEC 60512-15-1:2008-05 |
| Contact holder in insert Requirements >20 N | Test passed            |

## Resistance of inscriptions

|               |                        |
|---------------|------------------------|
| Specification | IEC 60068-2-70:1995-12 |
| Result        | Test passed            |

## Polarization and coding

|               |                        |
|---------------|------------------------|
| Specification | IEC 60512-13-5:2006-02 |
| Result        | Test passed            |

## Visual inspection

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-1:2002-02 |
| Result        | Test passed           |

## Dimension check

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-2:2002-02 |
| Result        | Test passed           |

## Electrical tests

### Thermal test | Test group C

|                            |                       |
|----------------------------|-----------------------|
| Specification              | IEC 60512-5-1:2002-02 |
| Tested number of positions | 12                    |

### Insulation resistance

|  |                       |
|--|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Insulation resistance, neighboring positions | > 5 MΩ                |

### Air clearances and creepage distances |

|  |                     |
|--|---------------------|
| Specification  | IEC 60664-1:2007-04 |
| Insulating material group                              | IIIa                |
| Comparative tracking index (IEC 60112)                 | CTI 175             |
| Rated insulation voltage (III/3)                       | 160 V               |
| Rated surge voltage (III/3)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/3) | 1.5 mm              |
| minimum creepage distance (III/3)                      | 2.5 mm              |

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

|  |        |
|--|--------|
| Rated insulation voltage (III/2)                       | 160 V  |
| Rated surge voltage (III/2)                            | 2.5 kV |
| minimum clearance value - non-homogenous field (III/2) | 1.5 mm |
| minimum creepage distance (III/2)                      | 1.6 mm |
| Rated insulation voltage (II/2)                        | 250 V  |
| Rated surge voltage (II/2)                             | 2.5 kV |
| minimum clearance value - non-homogenous field (II/2)  | 1.5 mm |
| minimum creepage distance (II/2)                       | 2.5 mm |

## Environmental and real-life conditions

### Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed            | 5g (60.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |

### Durability test

|  |                       |
|--|-----------------------|
| Specification                                | IEC 60512-9-1:2010-03 |
| Impulse withstand voltage at sea level       | 2.95 kV               |
| Contact resistance R <sub>1</sub>            | 1.2 mΩ                |
| Contact resistance R <sub>2</sub>            | 1.3 mΩ                |
| Insertion/withdrawal cycles                  | 25                    |
| Insulation resistance, neighboring positions | > 5 MΩ                |

### Climatic test

|                                   |   |
|-----------------------------------|---|
| Specification                     | ISO 6988:1985-02  |
| Corrosive stress                  | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Thermal stress                    | 100 °C/168 h  |
| Power-frequency withstand voltage | 1.39 kV   |

### Shocks

|                 |                                   |
|-----------------|-----------------------------------|
| Specification   | IEC 60068-2-27:2008-02            |
| Pulse shape     | Semi-sinusoidal                   |
| Acceleration    | 30g                               |
| Shock duration  | 18 ms                             |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |

### Ambient conditions

|   |   |
|---|---|
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064


<https://www.phoenixcontact.com/de/produkte/1779064>

## Packaging specifications

| Type of packaging |                     |
|-------------------|---------------------|
|                   | packed in cardboard |


## Drawings

Diagram

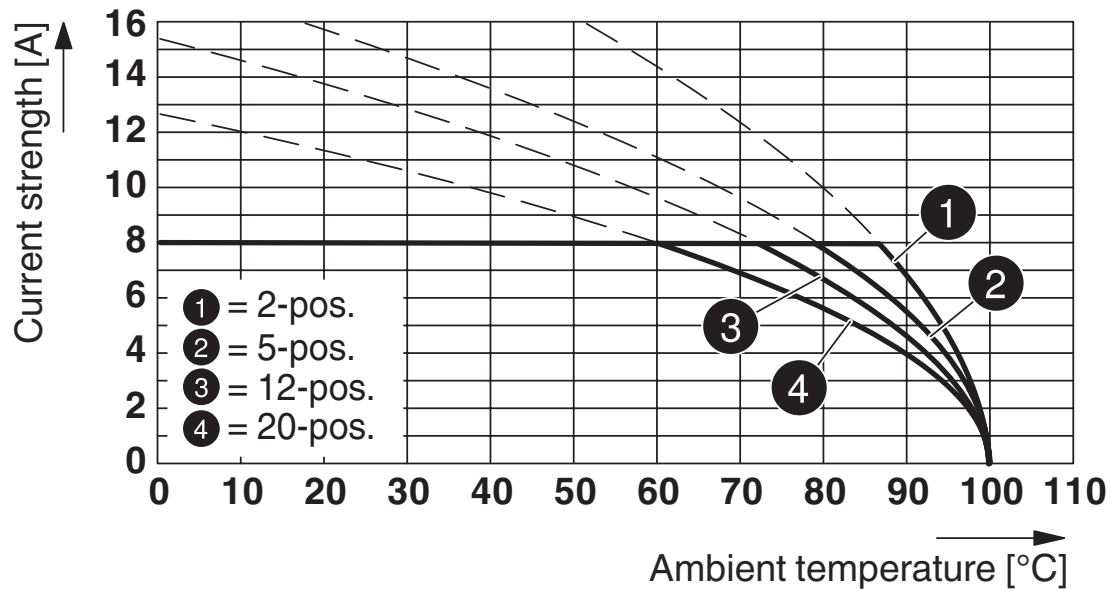

Type: FMC 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5 P... THR

Dimensional drawing

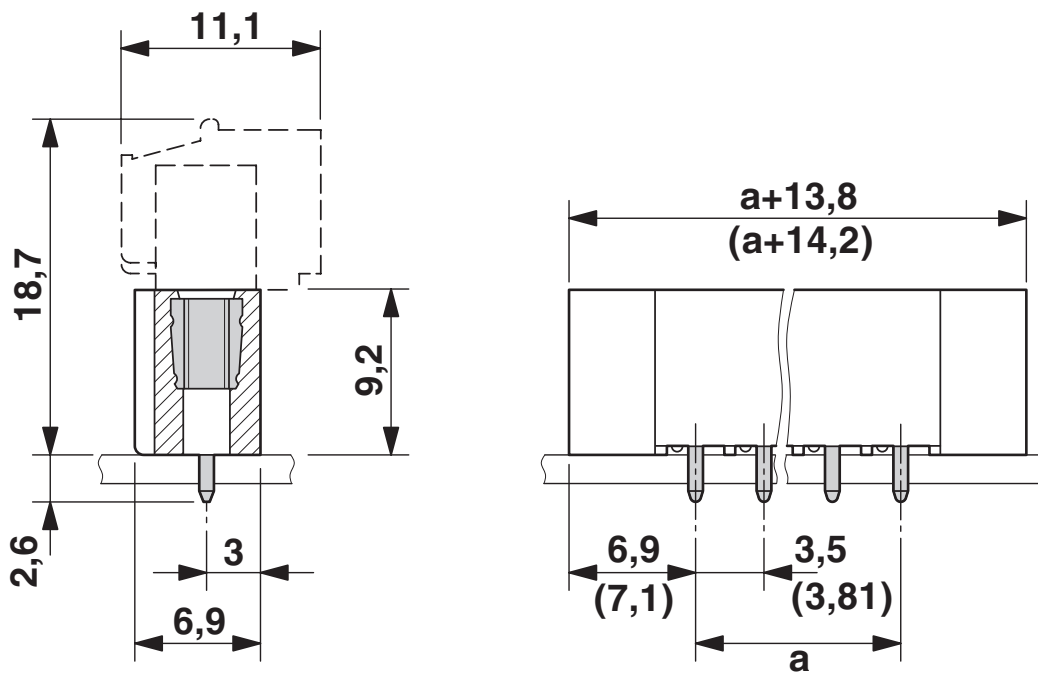


# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header




1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

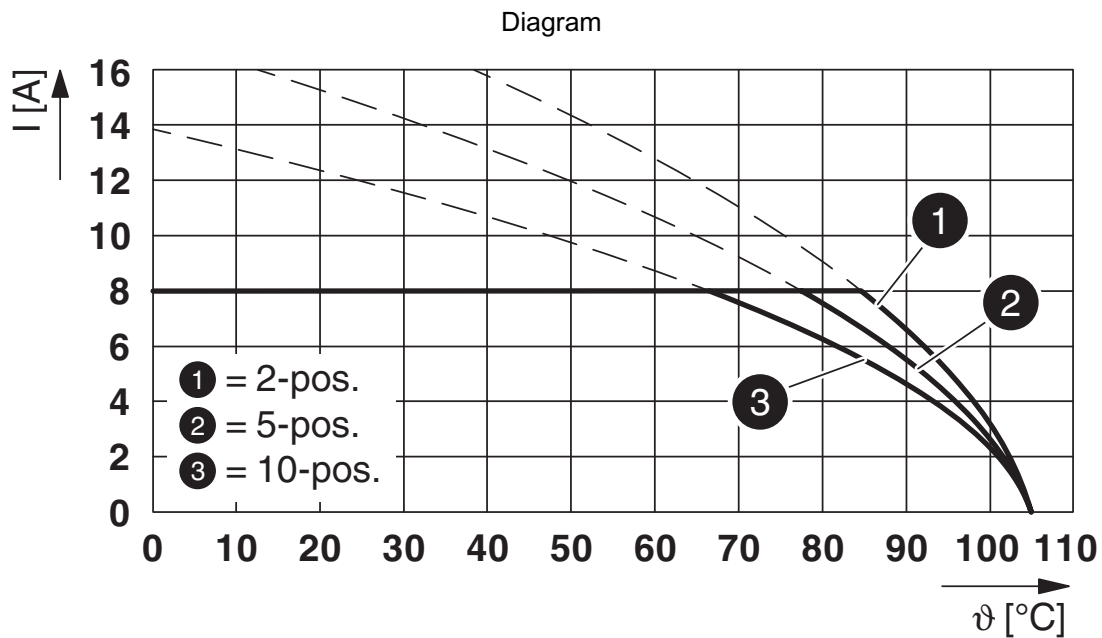


Type: TFMC 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5 P... THR

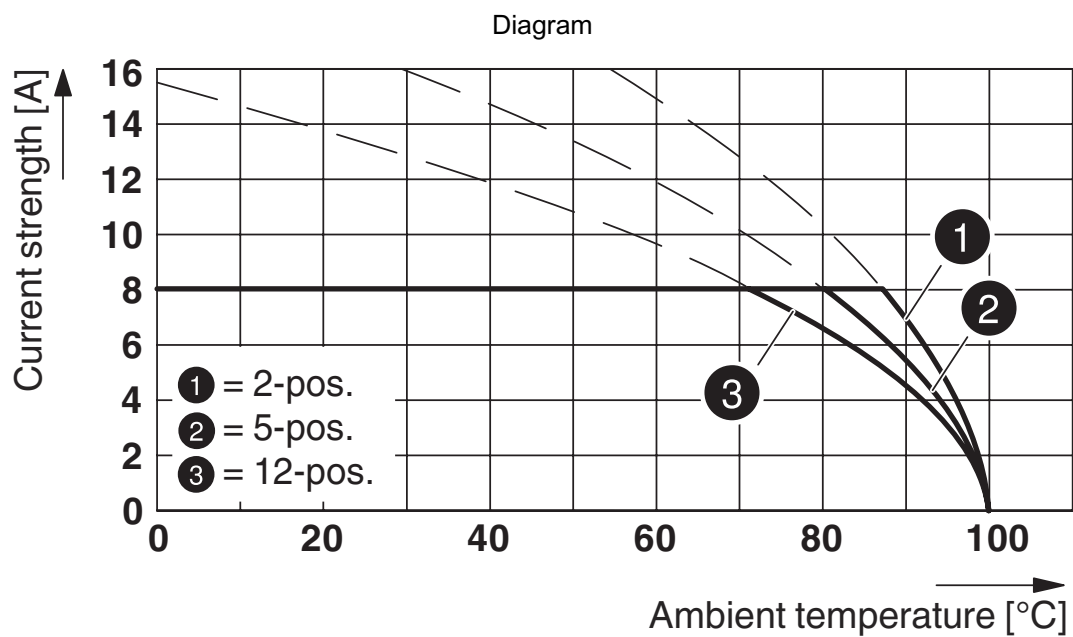

Type: MC 1,5/...-ST(F)-3,5 with MCV 1,5/...-G(F)-3,5 P... THR


1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

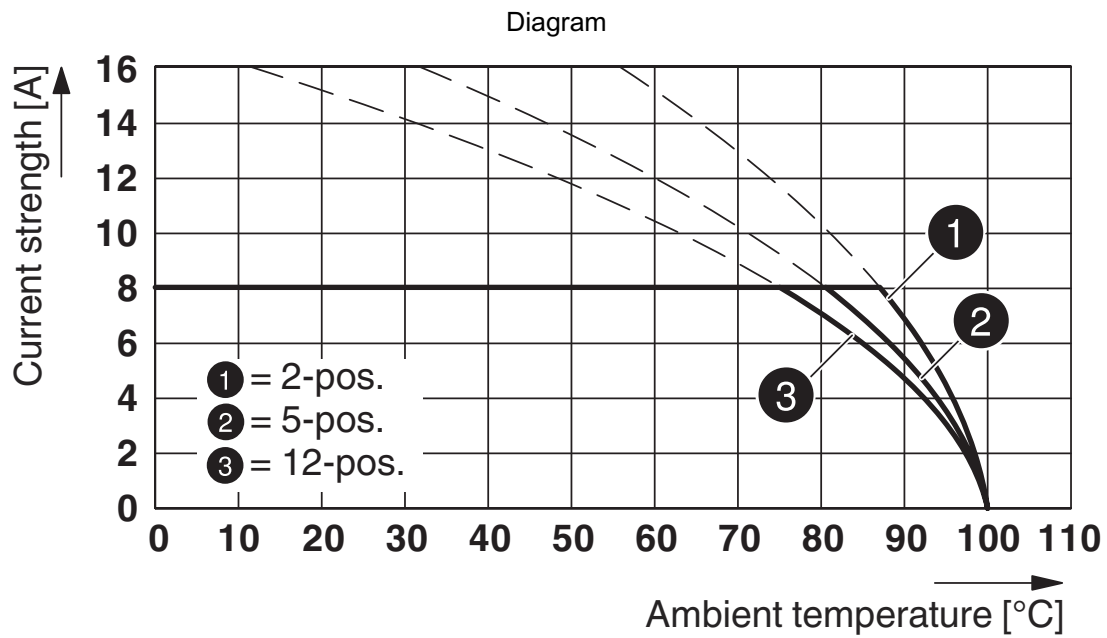

Type: FK-MCP 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5 P...THR

Drilling plan/solder pad geometry

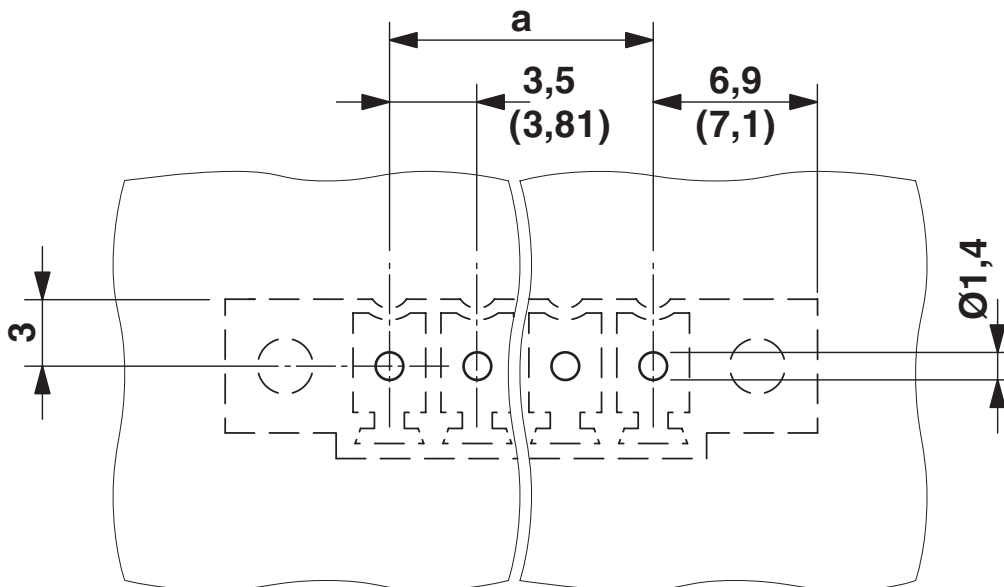


# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

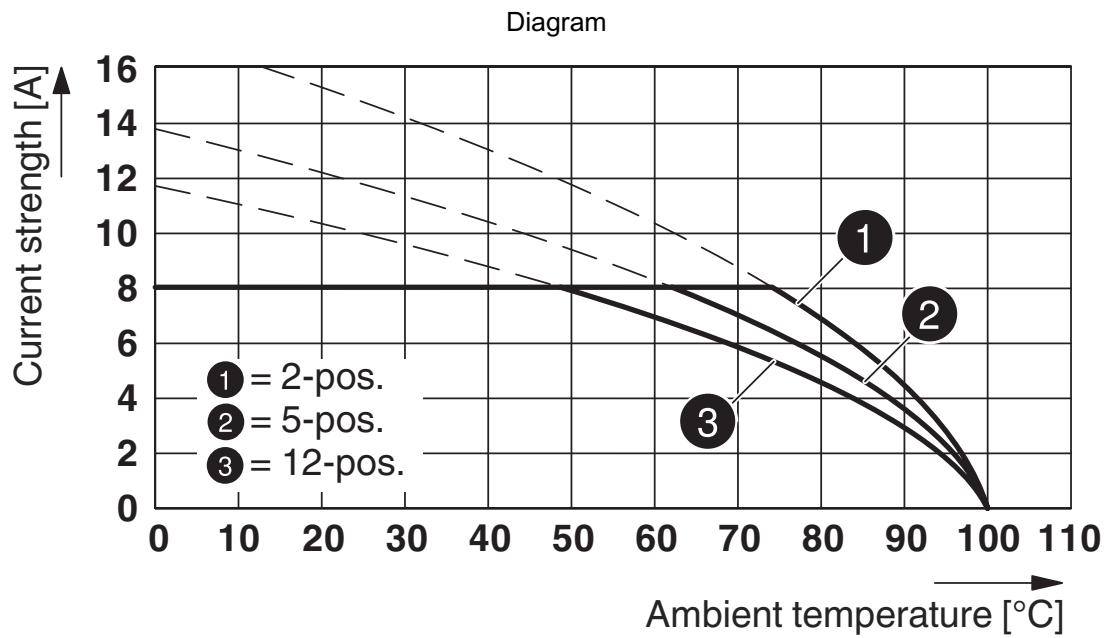

Type: MCV(W/R) 1,5/...-STF-3,81 with MCV 1,5/...-GF-3,5 P... THR

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header





1779064


<https://www.phoenixcontact.com/de/produkte/1779064>

## Approvals

|  <b>IECEE CB Scheme</b><br>Approval ID: DE1-60987-B1B2 |                       |                       |                   |                             |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|   | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|   | 160 V                 | 8 A                   | -                 | -                           |

|  <b>EAC</b><br>Approval ID: B.01687 |  |  |  |  |
|--|--|--|--|--|
|--|--|--|--|--|

|  <b>cULus Recognized</b><br>Approval ID: E60425-20110128 |                       |                       |                   |                             |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|   | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
| Use group B   | 300 V                 | 8 A                   | -                 | -                           |
| Use group D   | 300 V                 | 8 A                   | -                 | -                           |

|  <b>VDE Zeichengenehmigung</b><br>Approval ID: 40011723 |                       |                       |                   |                             |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|  | 160 V                 | 8 A                   | -                 | -                           |

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27440402 |
| ECLASS-10.0.1 | 27440402 |
| ECLASS-11.0   | 27460201 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002637 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# MCV 1,5/ 2-GF-3,5 P26 THR - PCB header



1779064

<https://www.phoenixcontact.com/de/produkte/1779064>

## Accessories

### CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/de/produkte/1734634>

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 52 35/3-1 20 00  
[info@phoenixcontact.de](mailto:info@phoenixcontact.de)