

# DMCV 1,5/17-G1F-3,5-LR P20THR - PCB header



1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



PCB headers, nominal cross section: 1.5 mm<sup>2</sup>, color: black, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Tin, type of contact: Male connector, number of potentials: 34, number of rows: 2, number of positions: 17, number of connections: 34, product range: DMCV 1,5/...-G1F-THR, pitch: 3.5 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2 mm, number of solder pins per potential: 1, plug-in system: COMBICON DFMC 1,5, Pin connector pattern alignment: Standard, locking: Snap-in locking, mounting: Lock & release threaded flange, type of packaging: packed in cardboard

## Your advantages

- Designed for integration into the SMT soldering process
- Vertical connection enables multi-row arrangement on the PCB
- Screwable flange for superior mechanical stability
- Automatic locking and intuitive release through Lock and Release operating lever in contrasting color
- Small component size for applications where space is at a premium

## Commercial Data

|                                      |                           |
|--------------------------------------|---------------------------|
| Item number                          | 1787548                   |
| Packing unit                         | 50 pc                     |
| Minimum order quantity               | 50 pc                     |
| Sales Key                            | E1 - Leiterplattenanschl. |
| Product Key                          | AABTJC                    |
| GTIN                                 | 4046356597166             |
| Weight per Piece (including packing) | 6,727 g                   |
| Weight per Piece (excluding packing) | 6,727 g                   |
| Customs tariff number                | 85366930                  |
| Country of origin                    | DE                        |

1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

## Technical Data

### Product properties

|                           |                                |
|---------------------------|--------------------------------|
| Type                      | Headers                        |
| Product line              | COMBICON Connectors S          |
| Product type              | PCB headers                    |
| Product family            | DMCV 1,5/..-G1F-THR            |
| Number of positions       | 17                             |
| Pitch                     | 3.5 mm                         |
| Number of connections     | 34                             |
| Number of rows            | 2                              |
| Mounting flange           | Lock & release threaded flange |
| Number of potentials      | 34                             |
| Pin layout                | Linear pinning                 |
| Solder pins per potential | 1                              |

### Electrical properties

|                             |                |
|-----------------------------|----------------|
| Nominal current $I_N$       | 8 A            |
| Nominal voltage $U_N$       | 160 V          |
| Degree of pollution         | 3              |
| Contact resistance          | 2.1 m $\Omega$ |
| Rated voltage (III/3)       | 160 V          |
| Rated surge voltage (III/3) | 2.5 kV         |
| Rated voltage (III/2)       | 160 V          |
| Rated surge voltage (III/2) | 2.5 kV         |
|                             | 250 V          |
| Rated surge voltage (II/2)  | 2.5 kV         |

### Mounting

|               |                |
|---------------|----------------|
| Mounting type | THR soldering  |
| Pin layout    | Linear pinning |

### Flange

|                   |        |
|-------------------|--------|
| Tightening torque | 0.2 Nm |
|-------------------|--------|

### Material specifications

#### Material data - contact

|   |  |
|---|--|
| Note                                      | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                          | Cu alloy   |
| Surface characteristics                   | Tin-plated   |
| Metal surface contact area (top layer)    | Tin (3 - 5 $\mu\text{m}$ Sn)   |
| Metal surface contact area (middle layer) | Nickel (1.3 - 3 $\mu\text{m}$ Ni)  |
| Metal surface soldering area (top layer)  | Tin (3 - 5 $\mu\text{m}$ Sn)   |

# DMCV 1,5/17-G1F-3,5-LR P20THR - PCB header



1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

|   |                        |
|---|------------------------|
| Metal surface soldering area (middle layer) | Nickel (1.3 - 3 µm Ni) |
|---|------------------------|

## Material data - housing

|  |              |
|--|--------------|
| Color (Housing)                        | black (9005) |
| Insulating material                    | LCP          |
| Insulating material group              | IIIa         |
| CTI according to IEC 60112             | 175          |
| Flammability rating according to UL 94 | V0           |

## Material data – actuating element

|          |    |
|----------|----|
| Color () | () |
|----------|----|

## Dimensions

|                       |         |
|-----------------------|---------|
| Dimensional drawing   |         |
| Pitch                 | 3.5 mm  |
| Width [w]             | 66.5 mm |
| Height [h]            | 12 mm   |
| Length [l]            | 10.6 mm |
| Installed height      | 10 mm   |
| Solder pin length [P] | 2 mm    |

## PCB design

|             |         |
|-------------|---------|
| Pin spacing | 5.50 mm |
|-------------|---------|

## Mechanical tests

### Test for conductor damage and slackening

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Repeated connection and disconnection

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Pull-out test

|   |   |
|---|---|
| Specification   | IEC 60999-1:1999-11                     |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.2 mm <sup>2</sup> / solid / > 10 N    |
|   | 0.2 mm <sup>2</sup> / flexible / > 10 N |
|   | 1.5 mm <sup>2</sup> / solid / > 40 N    |
|   | 1.5 mm <sup>2</sup> / flexible / > 40 N |

### Insertion and withdrawal forces

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

|                                     |     |
|-------------------------------------|-----|
| No. of cycles                       | 25  |
| Insertion strength per pos. approx. | 3 N |
| Withdraw strength per pos. approx.  | 2 N |

#### Contact holder in insert

|   |                        |
|---|------------------------|
| Specification                               | IEC 60512-15-1:2008-05 |
| Contact holder in insert Requirements >20 N | Test passed            |

#### Resistance of inscriptions

|               |                        |
|---------------|------------------------|
| Specification | IEC 60068-2-70:1995-12 |
| Result        | Test passed            |

#### Polarization and coding

|               |                        |
|---------------|------------------------|
| Specification | IEC 60512-13-5:2006-02 |
| Result        | Test passed            |

#### Visual inspection

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-1:2002-02 |
| Result        | Test passed           |

#### Dimension check

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-2:2002-02 |
| Result        | Test passed           |

## Electrical tests

#### Thermal test | Test group C

|                            |                       |
|----------------------------|-----------------------|
| Specification              | IEC 60512-5-1:2002-02 |
| Tested number of positions | 20                    |

#### Insulation resistance

|  |                       |
|--|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Insulation resistance, neighboring positions | > 5 MΩ                |

#### Temperature cycles

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

#### Air clearances and creepage distances |

|  |                     |
|--|---------------------|
| Specification  | IEC 60664-1:2007-04 |
| Insulating material group                              | IIIa                |
| Comparative tracking index (IEC 60112)                 | CTI 175             |
| Rated insulation voltage (III/3)                       | 160 V               |
| Rated surge voltage (III/3)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/3) | 1.5 mm              |
| minimum creepage distance (III/3)                      | 2.5 mm              |
| Rated insulation voltage (III/2)                       | 160 V               |

1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

|  |        |
|--|--------|
| Rated surge voltage (III/2)                            | 2.5 kV |
| minimum clearance value - non-homogenous field (III/2) | 1.5 mm |
| minimum creepage distance (III/2)                      | 1.6 mm |
| Rated insulation voltage (II/2)                        | 250 V  |
| Rated surge voltage (II/2)                             | 2.5 kV |
| minimum clearance value - non-homogenous field (II/2)  | 1.5 mm |
| minimum creepage distance (II/2)                       | 2.5 mm |

## Environmental and real-life conditions

### Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed            | 5g (60.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |

### Durability test

|  |                       |
|--|-----------------------|
| Specification                          | IEC 60512-9-1:2010-03 |
| Impulse withstand voltage at sea level | 2.95 kV               |
| Contact resistance $R_1$               | 2.1 m $\Omega$        |
| Contact resistance $R_2$               | 2.4 m $\Omega$        |
| Insertion/withdrawal cycles            | 25                    |

### Climatic test

|                                   |   |
|-----------------------------------|---|
| Specification                     | ISO 6988:1985-02  |
| Corrosive stress                  | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Thermal stress                    | 100 °C/168 h  |
| Power-frequency withstand voltage | 1.39 kV   |

### Ambient conditions

|   |   |
|---|---|
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

## Packaging specifications


|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|

1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

## Drawings


Dimensional drawing

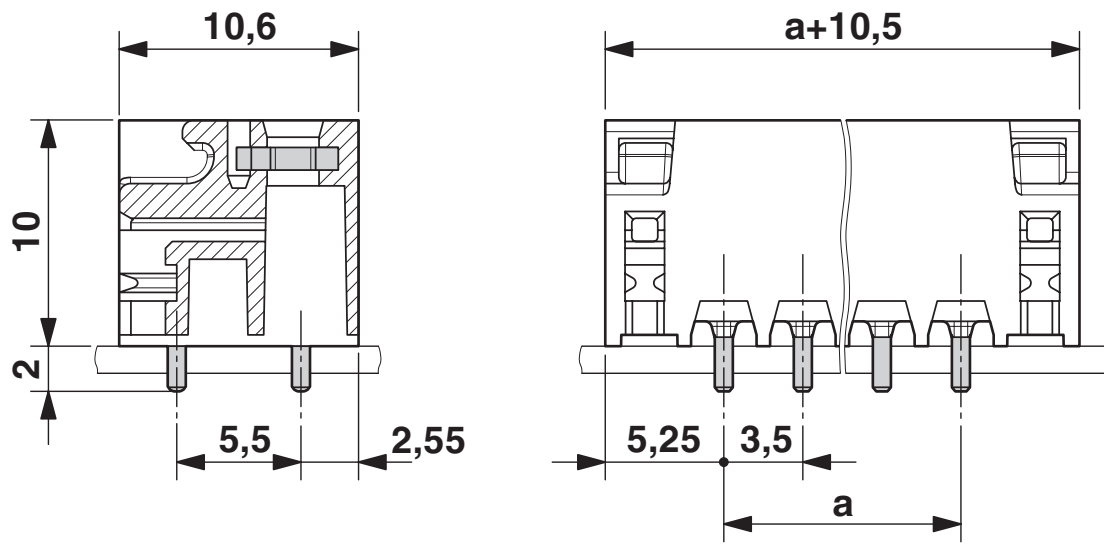

Schematic diagram




Use of the CP-DMC... coding profile

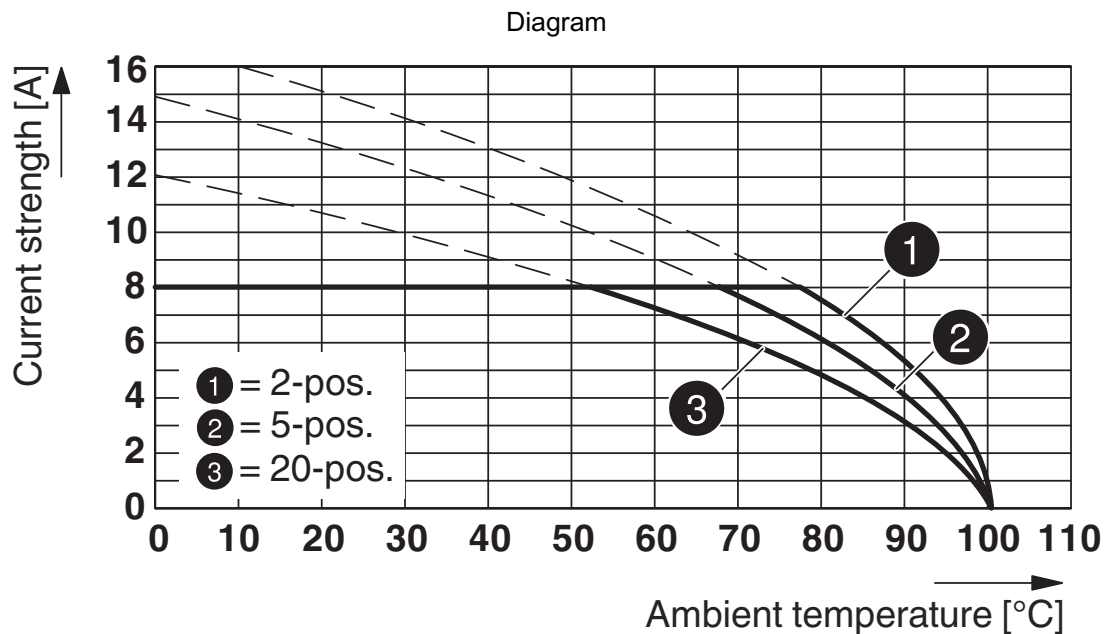

Type: DFMC 1,5/...-STF-3,5 with DMCV 1,5/...-G1F-3,5-LR P...THR

Drilling plan/solder pad geometry

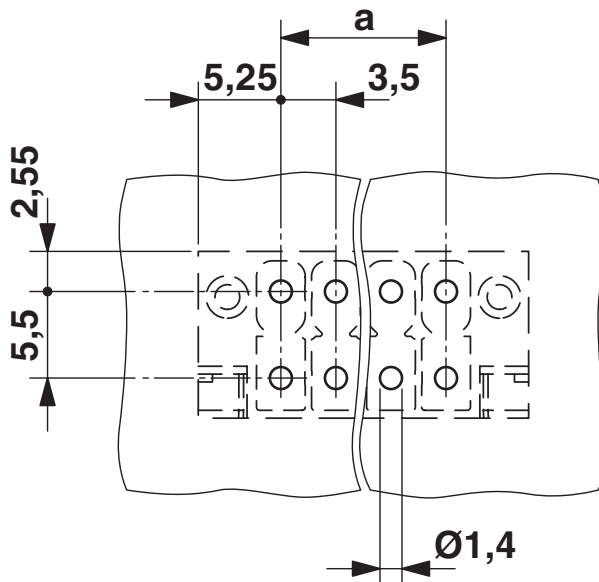


# DMCV 1,5/17-G1F-3,5-LR P20THR - PCB header



1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

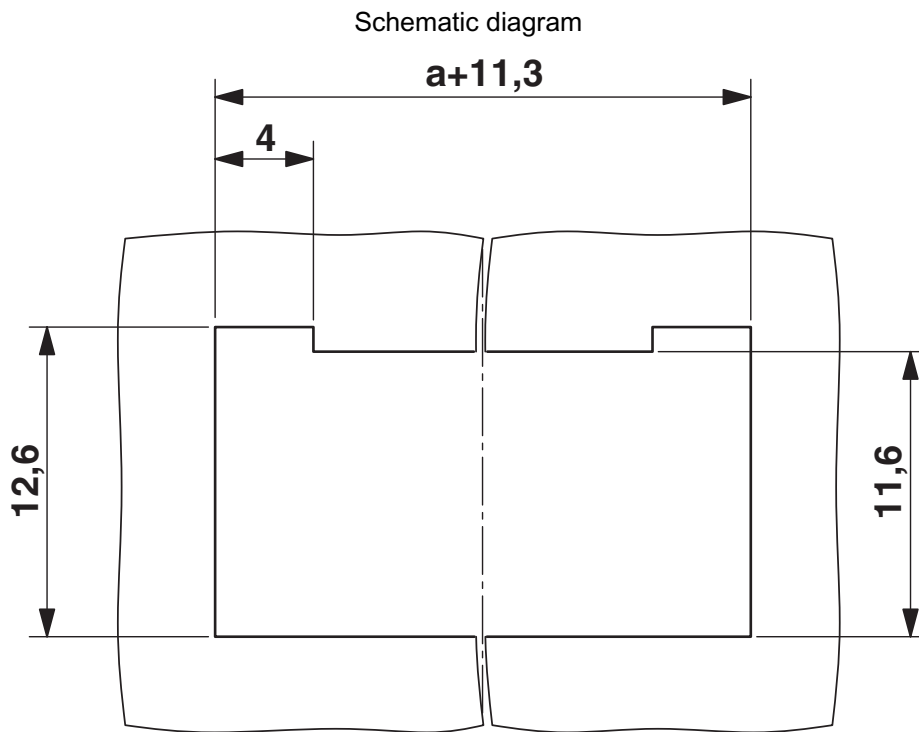

Panel cutout


1787548


<https://www.phoenixcontact.com/de/produkte/1787548>

## Approvals

|  <b>IECEE CB Scheme</b><br>Approval ID: DE1-60359-B1B2 |                       |                       |                   |                      |
|---|-----------------------|-----------------------|-------------------|----------------------|
|   | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $mm^2$ |
|   | 160 V                 | 8 A                   | -                 | -                    |

|  <b>EAC</b><br>Approval ID: B.01687 |  |  |  |  |
|--|--|--|--|--|
|--|--|--|--|--|

|  <b>cULus Recognized</b><br>Approval ID: E60425-20110128 |                       |                       |                   |                      |
|---|-----------------------|-----------------------|-------------------|----------------------|
|   | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $mm^2$ |
| Use group B   | 300 V                 | 8 A                   | -                 | -                    |
| Use group C   | 50 V                  | 8 A                   | -                 | -                    |
| Use group D   | 300 V                 | 8 A                   | -                 | -                    |

|  <b>VDE Gutachten mit Fertigungsüberwachung</b><br>Approval ID: 40038423 |                       |                       |                   |                      |
|---|-----------------------|-----------------------|-------------------|----------------------|
|   | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $mm^2$ |
|   | 160 V                 | 8 A                   | -                 | -                    |

1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27440402 |
| ECLASS-10.0.1 | 27440402 |
| ECLASS-11.0   | 27460201 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002637 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# DMCV 1,5/17-G1F-3,5-LR P20THR - PCB header



1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# DMCV 1,5/17-G1F-3,5-LR P20THR - PCB header



1787548

<https://www.phoenixcontact.com/de/produkte/1787548>

## Accessories

### CP-DMC 1,5 NAT - Coding profile

1790647

<https://www.phoenixcontact.com/de/produkte/1790647>

Coding profile, for insertion between the coding ribs of the connector and the header following the reflow soldering process, insulating material, color: natural




---

### DFMC 1,5/17-STF-3,5 - PCB connector

1790441

<https://www.phoenixcontact.com/de/produkte/1790441>

Plug, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 17 with 34 contacts, pitch: 3.5 mm, connection method: spring-cage connection, color: green, contact surface: tin



# DMCV 1,5/17-G1F-3,5-LR P20THR - PCB header

1787548

<https://www.phoenixcontact.com/de/produkte/1787548>




## DFMC 1,5/17-ST-3,5-LR - PCB connector

1790632

<https://www.phoenixcontact.com/de/produkte/1790632>

Plug, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 17 with 34 contacts, pitch: 3.5 mm, connection method: spring-cage connection, color: green, contact surface: tin



---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

[info@phoenixcontact.de](mailto:info@phoenixcontact.de)