


## OMNIMATE Signal - series BL/SL 5.08 SLS 5.08/06/180F SN OR BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Product image

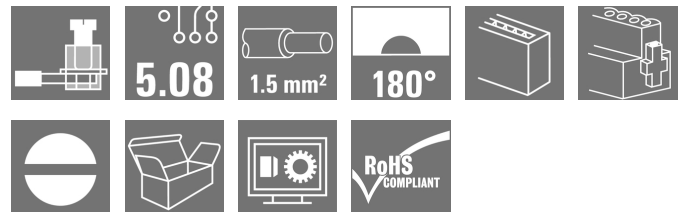

Similar to illustration

Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

### General ordering data

|              |   |
|--------------|---|
| Type         | SLS 5.08/06/180F SN OR BX   |
| Order No.    | <a href="#">1846400000</a>  |
| Version      | PCB plug-in connector, male plug, 5.08 mm, Number of poles: 6, 180°, Clamping yoke connection, Clamping range, max. : 3.31 mm², Box |
| GTIN (EAN)   | 4032248362103   |
| Qty.         | 42 pc(s).   |
| Product data | IEC: 400 V / 21.5 A / 0.2 - 2.5 mm²<br>UL: 300 V / 14 A / AWG 26 - AWG 12   |
| Packaging    | Box   |

Creation date April 26, 2020 3:26:40 PM CEST

**OMNIMATE Signal - series BL/SL 5.08  
SLS 5.08/06/180F SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Height     | 15.2 mm | Height (inches) | 0.598 inch |
| Depth      | 22.3 mm | Depth (inches)  | 0.878 inch |
| Net weight | 11.3 g  |                 |            |

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**System Parameters**

|                          |                                     |  |  |
|--------------------------|-------------------------------------|--|--|
| Product family           | OMNIMATE Signal - series BL/SL 5.08 | Type of connection                           | Field connection                                 |
| Wire connection method   | Clamping yoke connection            | Pitch in mm (P)                              | 5.08 mm  |
| Pitch in inches (P)      | 0.2 inch                            | Conductor outlet direction                   | 180°   |
| Number of poles          | 6                                   | L1 in mm                                     | 25.4 mm  |
| L1 in inches             | 1 inch                              | Number of rows                               | 1  |
| Pin series quantity      | 1                                   | Touch-safe protection acc. to DIN VDE 57 106 | finger-safe plugged/ back-of-hand-safe unplugged |
| Volume resistance        | ≤ 5mΩ                               | Can be coded                                 | Yes  |
| Stripping length         | 7 mm                                | Tightening torque, min.                      | 0.4 Nm   |
| Tightening torque, max.  | 0.5 Nm                              | Clamping screw                               | M 2.5  |
| Screwdriver blade        | 0.6 x 3.5                           | Screwdriver blade standard                   | DIN 5264-A                                       |
| Plugging cycles          | 25                                  | Plugging force/pole, max.                    | 4 N  |
| Pulling force/pole, max. | 3 N                                 |  |  |

**Material data**

|                                       |                          |                                       |                     |
|---------------------------------------|--------------------------|---------------------------------------|---------------------|
| Insulating material                   | PBT                      | Colour                                | orange              |
| Colour chart (similar)                | RAL 2000                 | Insulating material group             | IIIa                |
| Comparative Tracking Index (CTI)      | ≥ 200                    | Insulation strength                   | ≥ 10 <sup>8</sup> Ω |
| UL 94 flammability rating             | V-0                      | GWFI                                  | 960 °C              |
| Contact material                      | CuSn                     | Contact surface                       | tinned              |
| Layer structure of plug contact       | 4-8 μm Sn hot-dip tinned | Storage temperature, min.             | -25 °C              |
| Storage temperature, max.             | 50 °C                    | Max. relative humidity during storage | 70 %                |
| Operating temperature, min.           | -50 °C                   | Operating temperature, max.           | 100 °C              |
| Temperature range, installation, min. | -25 °C                   | Temperature range, installation, max. | 100 °C              |

**Conductors suitable for connection**

|   |                      |
|---|----------------------|
| Clamping range, min.  | 0.13 mm <sup>2</sup> |
| Clamping range, max.  | 3.31 mm <sup>2</sup> |
| Wire connection cross section AWG, min.                             | AWG 26               |
| Wire connection cross section AWG, max.                             | AWG 12               |
| Solid, min. H05(07) V-U   | 0.2 mm <sup>2</sup>  |
| Solid, max. H05(07) V-U   | 2.5 mm <sup>2</sup>  |
| Flexible, min. H05(07) V-K  | 0.2 mm <sup>2</sup>  |
| Flexible, max. H05(07) V-K  | 2.5 mm <sup>2</sup>  |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm <sup>2</sup> min. |                      |
| w. plastic collar ferrule, DIN 46228 pt 4, 2.5 mm <sup>2</sup> max. |                      |
| w. wire end ferrule, DIN 46228 pt 1, 0.2 mm <sup>2</sup> min.       |                      |

Creation date April 26, 2020 3:26:40 PM CEST

**OMNIMATE Signal - series BL/SL 5.08  
SLS 5.08/06/180F SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

|   |  |                              |                        |      |
|---|--|------------------------------|------------------------|------|
| w. wire end ferrule, DIN 46228 pt 1, max.       | 2.5 mm <sup>2</sup>  |                              |                        |      |
| Plug gauge in accordance with EN 60999 a x b; ø | 2.8 mm x 2.0 mm; 2.4 mm  |                              |                        |      |
| Clampable conductor                             | Cross-section for conductor connection   | Type                         | fine-wired             |      |
|   |  | nominal                      | 0.5 mm <sup>2</sup>    |      |
|   | wire end ferrule   | Stripping length             | nominal                | 6 mm |
|   |  | Recommended wire-end ferrule | <a href="#">H0.5/6</a> |      |
|   | Cross-section for conductor connection   | Type                         | fine-wired             |      |
|   |  | nominal                      | 1 mm <sup>2</sup>      |      |
|   | wire end ferrule   | Stripping length             | nominal                | 6 mm |
|   |  | Recommended wire-end ferrule | <a href="#">H1.0/6</a> |      |
|   | Cross-section for conductor connection   | Type                         | fine-wired             |      |
|   |  | nominal                      | 1.5 mm <sup>2</sup>    |      |
|   | wire end ferrule   | Stripping length             | nominal                | 7 mm |
|   |  | Recommended wire-end ferrule | <a href="#">H1.5/7</a> |      |
| Cross-section for conductor connection          | Type   | fine-wired                   |                        |      |
|   | nominal  | 2.5 mm <sup>2</sup>          |                        |      |
| wire end ferrule                                | Stripping length   | nominal                      | 7 mm                   |      |
|   | Recommended wire-end ferrule   | <a href="#">H2.5/7</a>       |                        |      |
| Cross-section for conductor connection          | Type   | fine-wired                   |                        |      |
|   | nominal  | 0.75 mm <sup>2</sup>         |                        |      |
| wire end ferrule                                | Stripping length   | nominal                      | 6 mm                   |      |
|   | Recommended wire-end ferrule   | <a href="#">H0.75/6</a>      |                        |      |
| Reference text                                  | The outside diameter of the plastic collar should not be larger than the pitch (P), Length of ferrules is to be chosen depending on the product and the rated voltage. |                              |                        |      |
| Max. clamping range                             | 3.31 mm <sup>2</sup>   |                              |                        |      |

**Rated data acc. to IEC**

|   |                        |   |                   |
|---|------------------------|---|-------------------|
| tested acc. to standard   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 21.5 A            |
| Rated current, max. number of poles (Tu=20°C)                             | 16 A                   | Rated current, min. number of poles (Tu=40°C)                         | 18 A              |
| Rated current, max. number of poles (Tu=40°C)                             | 14 A                   | Rated voltage for surge voltage class / pollution degree II/2         | 400 V             |
| Rated voltage for surge voltage class / pollution degree III/2            | 320 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 250 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 4 kV                   | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 4 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 4 kV                   | Short-time withstand current resistance                               | 3 x 1s with 120 A |

**Rated data acc. to CSA**

|                                   |        |                                   |        |
|-----------------------------------|--------|-----------------------------------|--------|
| Rated voltage (Use group B / CSA) | 300 V  | Rated voltage (Use group D / CSA) | 300 V  |
| Rated current (Use group B / CSA) | 15 A   | Rated current (Use group D / CSA) | 10 A   |
| Wire cross-section, AWG, min.     | AWG 26 | Wire cross-section, AWG, max.     | AWG 12 |


**Data sheet**

**OMNIMATE Signal - series BL/SL 5.08  
SLS 5.08/06/180F SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**Rated data acc. to UL 1059**

|                                       |   |                                       |        |
|---------------------------------------|---|---------------------------------------|--------|
| Institute (UR)                        |  | Certificate No. (UR)                  | E60693 |
| Rated voltage (Use group B / UL 1059) | 300 V   | Rated voltage (Use group D / UL 1059) | 300 V  |
| Rated current (Use group B / UL 1059) | 14 A  | Rated current (Use group D / UL 1059) | 10 A   |
| Wire cross-section, AWG, min.         | AWG 26  | Wire cross-section, AWG, max.         | AWG 12 |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate.            |                                       |        |

**Packing**

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 30 mm  |
| VPE width | 135 mm | VPE height | 350 mm |

**Classifications**

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC002638    | ETIM 7.0   | EC002638    |
| eClass 9.0  | 27-44-03-09 | eClass 9.1 | 27-44-03-09 |
| eClass 10.0 | 27-44-03-09 | UNSPSC     | 30-21-18-10 |

**Notes**

|       |  |
|-------|--|
| Notes | <ul style="list-style-type: none"> <li>• Additional colours on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Wire end ferrule without plastic collar to DIN 46228/1</li> <li>• Wire end ferrule with plastic collar to DIN 46228/4</li> <li>• P on drawing = pitch</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> </ul> |
|-------|--|

|                |  |
|----------------|--|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request. |
|----------------|--|

**Approvals**

|           |   |
|-----------|---|
| Approvals |  |
| ROHS      | Conform   |

**Data sheet****OMNIMATE Signal - series BL/SL 5.08  
SLS 5.08/06/180F SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a>   |
| Brochure/Catalogue                          | <a href="#">FL DRIVES EN</a><br><a href="#">MB DEVICE MANUF. EN</a><br><a href="#">FL DRIVES DE</a><br><a href="#">CAT 2 PORTFOLIOGUIDE EN</a><br><a href="#">FL BUILDING SAFETY EN</a><br><a href="#">FL APPL LED LIGHTING EN</a><br><a href="#">FL INDUSTR.CONTROLS EN</a><br><a href="#">FL MACHINE SAFETY EN</a><br><a href="#">FL HEATING ELECTR EN</a><br><a href="#">FL APPL INVERTER EN</a><br><a href="#">FL BASE STATION EN</a><br><a href="#">FL ELEVATOR EN</a><br><a href="#">FL POWER SUPPLY EN</a><br><a href="#">FL 72H SAMPLE SER EN</a><br><a href="#">PO OMNIMATE EN</a> |
| Engineering Data                            | <a href="#">WSCAD</a>   |
| Engineering Data                            | <a href="#">STEP</a>  |


**Data sheet**

**OMNIMATE Signal - series BL/SL 5.08  
SLS 5.08/06/180F SN OR BX**


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**


**Dimensional drawing**

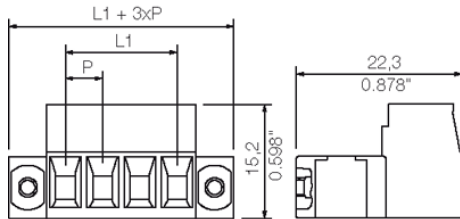


**Graph**

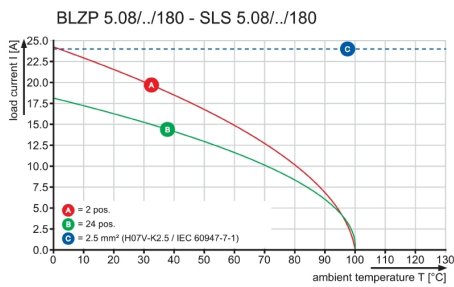

**Graph**


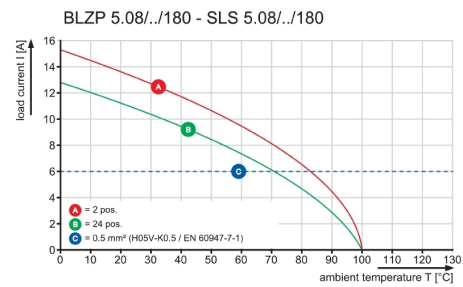


**Graph**

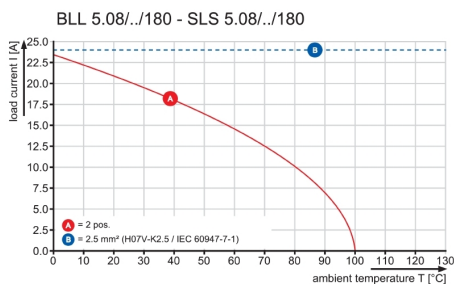

WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRUECKLICH GESTATET.  
 ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENSERSATZ. ALLE RECHTE FUER DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTEREINTRAGUNG VORBEHALTEN.  
 THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED.  
 OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN.

DIE DEUTSCHE VERSION IST VERBINDLICH  
THE GERMAN VERSION IS BINDING

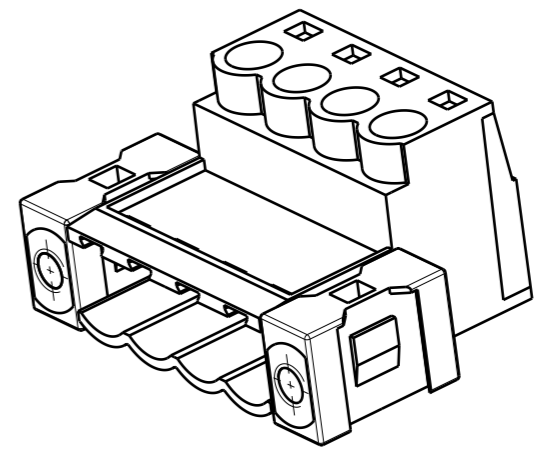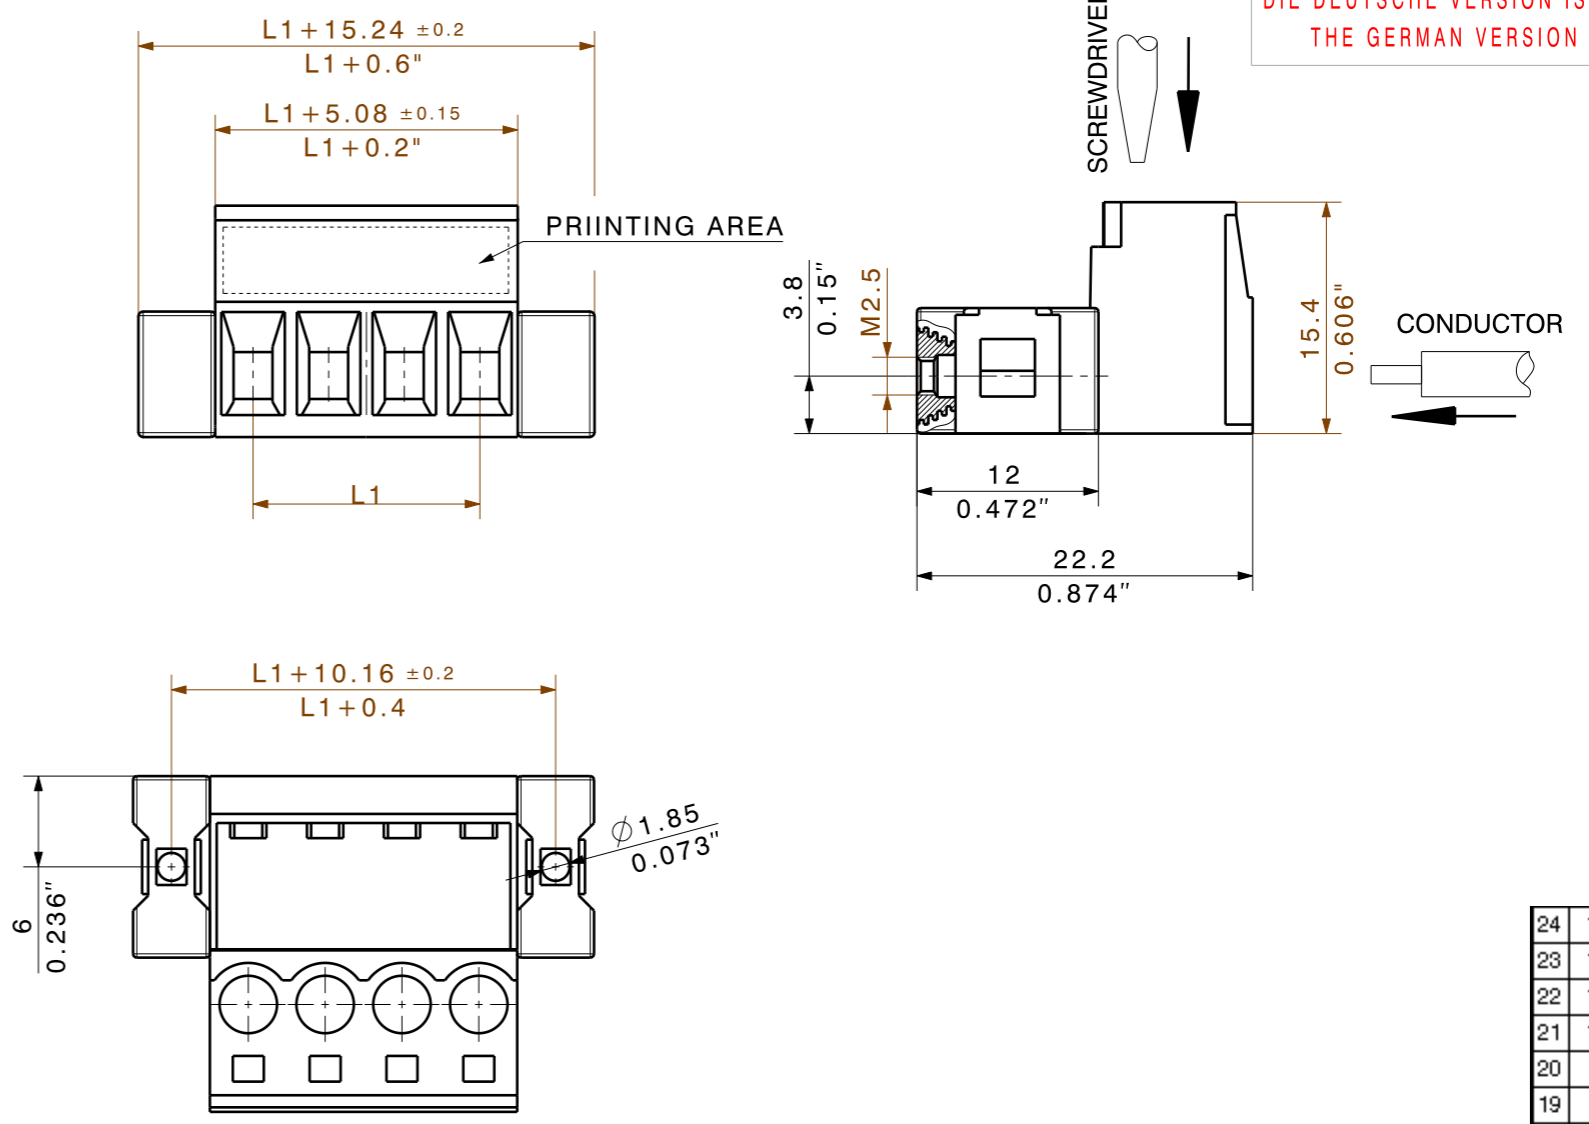

|    |         |           |
|----|---------|-----------|
| 24 | 116,84  | 4,600     |
| 23 | 111,76  | 4,400     |
| 22 | 106,68  | 4,200     |
| 21 | 101,60  | 4,000     |
| 20 | 96,52   | 3,800     |
| 19 | 91,44   | 3,600     |
| 18 | 86,36   | 3,400     |
| 17 | 81,28   | 3,200     |
| 16 | 76,20   | 3,000     |
| 15 | 71,12   | 2,800     |
| 14 | 66,04   | 2,600     |
| 13 | 60,96   | 2,400     |
| 12 | 55,88   | 2,200     |
| 11 | 50,80   | 2,000     |
| 10 | 45,72   | 1,800     |
| 9  | 40,64   | 1,600     |
| 8  | 35,56   | 1,400     |
| 7  | 30,48   | 1,200     |
| 6  | 25,40   | 1,000     |
| 5  | 20,32   | 0,800     |
| 4  | 15,24   | 0,600     |
| 3  | 10,16   | 0,400     |
| 2  | 5,08    | 0,200     |
| n  | L1 [mm] | L1 [Inch] |

For the mounting of PCBs, it should be noted that the rated data relates only to the PCB components alone.  
 The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110.  
 The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application.  
 Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

SHOWN: SLS 5.08/04/180F

|                                   |  |  |   |  |
|-----------------------------------|--|--|---|--|
|                                   | <b>METRIC TOLERANCES:</b><br>X. = ±0.3<br>X.X = ±0.1<br>X.XX = ±0.05 |  | 53611/5<br>06.10.10 HERTEL_S 01                             | CAT.NO.:<br><b>C 34205 03</b>                  |
|                                   | MODIFICATION   |  |   | DRAWING NO. SHEET 01 OF 02 SHEETS<br>ISSUE NO. |
|                                   | SCALE: 2:1   | DRAWN: 26.03.2007<br>RESPONSIBLE: HERTEL_S | DATE: 06.10.2010<br>CHECKED: HECKERT_M                      | NAME: HECKERT_M                                |
| SUPERSEDES: -<br>SUPERSEDED BY: . |  | APPROVED: HECKERT_M                        | <b>SLS 5.08/././180 F(FI)..</b><br>STIFTLISTE<br>PIN HEADER |  |
| PRODUCT FILE: SLS 5.08            |  |  | 7314  |  |