

NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\pm .001$)
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS NON-FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED YELLOW)

STUD SIZES: (.0005)


02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390
209 = .209

"UL" LISTING #E32244
"CSA" LISTING #18689

WIRE SIZE: 12 - 10 AWG
4.0 - 6.0 MM²

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

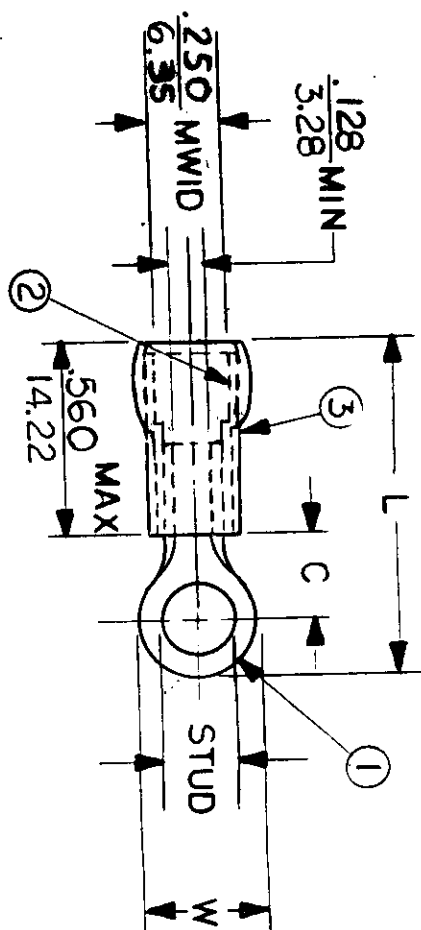

FILE NO.

C-CD-801-05

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	REFERENCE	SCALE: NTS	DATE	TITLE:	DWG. NO.	CUSTOMER DWG
C-801-	.750 19.05	.611 15.51	1.580 40.13				AVAILABLE STUD SIZES		
C-828-	.375 9.53	.303 7.70	1.091 27.71				14X, 56X, 38X, 76X, 12X		
C-830-	.530 13.46	.393 9.98	1.258 31.95				04X, 06X, 08X, 10X, 209X		
C-836-	.282 7.16	.306 7.77	1.047 26.59				04X, 06X, 08X		
C-840-	.592 15.04	.466 11.83	1.362 34.59				10X, 14X, 56X, 38X, 209X, 413X		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED								EIC Incorporated	
FRAC. DEC. ANG.				DRWN. BY: EMI		9-22-87		RING TONGUE TERMINAL AVIKRIMP 800-SERIES	
± ± ±				CHKD. BY:					
				APPRD. BY:					