


BB-CD-805-02

100.001

-

170 MW

WIRE SIZE: 16 - 14 AWG
1.0 - 2.5 MM²

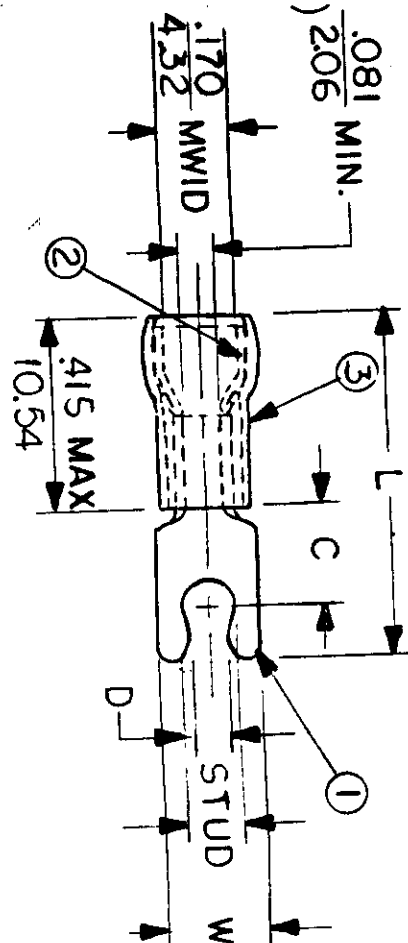

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$ (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"D" ±.005	AVAILABLE STUD SIZES	TITLE:	
						SCALE:	DATE
BB-8707	$\frac{.250}{6.35}$	$\frac{.230}{5.84}$	$\frac{.825}{20.96}$	$\frac{1.05}{2.67}$	05 ($\frac{.127 \pm .005}{3.23}$)		
BB-8707-	$\frac{.250}{6.35}$	$\frac{.230}{5.84}$	$\frac{.825}{20.96}$	$\frac{1.14}{2.90}$	06		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED				REFERENCE	SCALE:	NTS	DATE
FRAC.	DEC.	ANG.			DRWN. BY:	JJ	11-9-84
±	±	±			CHKD. BY:	GZ	11-29-84
					APPRD. BY:		
SNAP SPADE SHORT TONGUE TERMINAL AVIKRIMP 800-SERIES							
							
DWG. NO.		A		CUSTOMER DWG			