

**NOTES:**

- ① MAT'L: COPPER (STOCK TKN.  $\frac{.028}{71}$   $\frac{.886}{71}$ )
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED)

STUD SIZES: ( $\pm .005$ )


- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

"UL" LISTING # E32244  
 "CSA" LISTING # 18689

WIRE SIZE: 22-18 AWG  
 .25-1.5 MM<sup>2</sup>

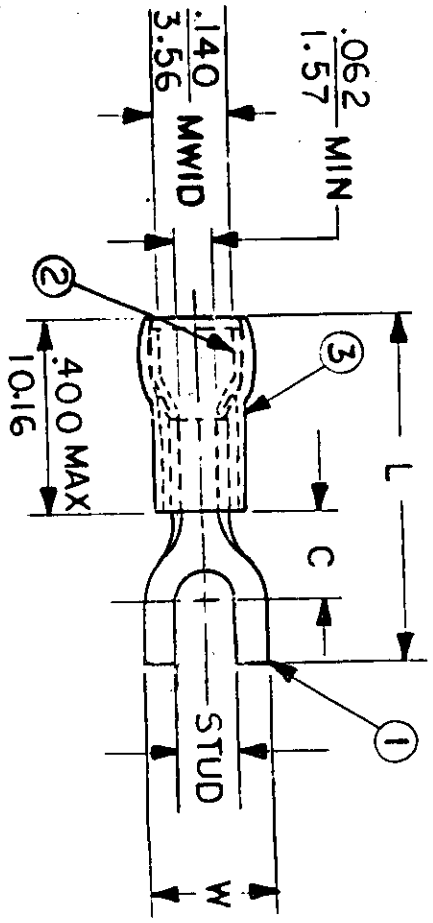

FILE NO. AA-CD-803-03

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	REFERENCE	SCALE: NTS	DATE	TITLE:	DWG. NO.	A	CUSTOMER DWG
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED										
FRAC.	DEC.	ANG.			CHKD. BY: 5Z	11.20.84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES			
±	±	±			APPRD. BY:					