

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [19276-0009](#)
Status: **Active**
Description: Quixon Quick Disconnect, InsulKrimp™ Style, Female, Fully Insulated Yellow, 10-12 AWG, Mylar Tap

Documents:

[Drawing \(PDF\)](#) [Product Specification PS-19902-015 \(PDF\)](#)
[Product Specification PS-19902-011 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E79133

General

Product Family Quick Disconnects
 Series [19276](#)
 Comments Low Insertion Force
 Crimp Quality Equipment Yes
 Insulated Fully
 Product Name InsulKrimp™, Quixon
 Type Quick Disconnect
 UPC 884982565159

Physical

Barrel Type Closed
 Color - Resin Yellow
 Flammability 94V-2
 Gender Female
 Glow-Wire Compliant No
 Insulation Nylon (PA)
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Net Weight 1.236/g
 Orientation Straight
 Packaging Type Embossed Tape on Reel
 Tab Thickness 0.41mm
 Tab Width 7.87mm
 Temperature Range - Operating -55°C to +105°C
 Wire Insulation Diameter 5.97mm
 Wire Size AWG 10, 12

Electrical


Voltage - Maximum 600V

Material Info

Old Part Number C-2293T-LIF

Reference - Drawing Numbers

Product Specification PS-19902-011, PS-19902-015
 Sales Drawing SD-19276-001

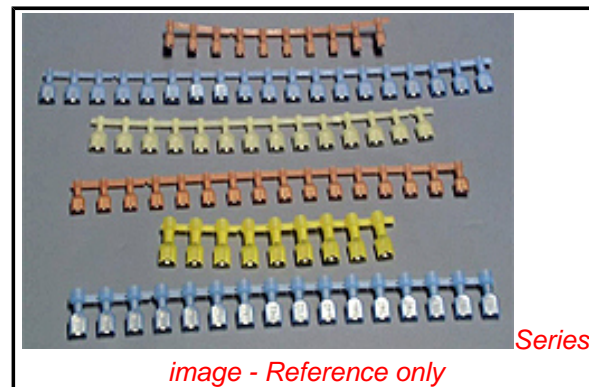

EU RoHS

ELV and RoHS Compliant
REACH SVHC Not Reviewed
Low-Halogen Status Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[19276Series](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
ATP Perishable	0190270014
Tool Kit used in ATP Presses that Process Product on Tape	
Mini-Mac™ Applicator	0638852800