


**SVZ 7.62HP/03/180RSH180I SN BK BX**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

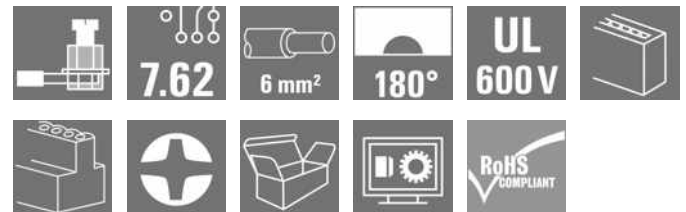**Product image**


High-performance male header with the proven, 100% maintenance-free Weidmüller steel clamping yoke. Side-by-side mounting without sacrificing any poles or with patented multifunction flange for secure, fast fixing without tools. Maximum connection and operating reliability thanks to a mating profile that prevents incorrect connection, unique coding diversity, incorrect wiring protection. Suitable for labelling.

**General ordering data**

Version	PCB plug-in connector, male plug, 7.62 mm, Number of poles: 3, 180°, Clamping yoke connection, Clamping range, max.: 6 mm <sup>2</sup> , Box
Order No.	<a href="#">1932500000</a>
Type	SVZ 7.62HP/03/180RSH180I SN BK BX
GTIN (EAN)	4032248584116
Qty.	50 pc(s).
Product data	IEC: 1000 V / 57 A / 0.2 - 10 mm <sup>2</sup> UL: 600 V / 42 A / AWG 24 - AWG 8
Packaging	Box

Creation date September 6, 2023 2:25:57 PM CEST

## SVZ 7.62HP/03/180RSH180I SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	101.1 mm	Depth (inches)	3.98 inch
Height	25.7 mm	Height (inches)	1.012 inch
Width	38.1 mm	Width (inches)	1.5 inch
Net weight	35.44 g		

## Temperatures

Operating temperature, min.	-50 °C	Operating temperature, max.	125 °C
-----------------------------	--------	-----------------------------	--------

## System Parameters

Product family	OMNIMATE Power - series BV/SV 7.62HP	Type of connection	Field connection
Wire connection method	Clamping yoke connection	Pitch in mm (P)	7.62 mm
Pitch in inches (P)	0.3 inch	Conductor outlet direction	180°
Number of poles	3	L1 in mm	15.24 mm
L1 in inches	0.6 inch	Number of rows	1
Pin series quantity	1	Rated cross-section	6 mm <sup>2</sup>
Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch	Touch-safe protection acc. to DIN VDE 0470	IP20 plugged
Protection degree	IP20	Volume resistance	4.50 mΩ
Can be coded	Yes	Stripping length	12 mm
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Clamping screw	M 3	Screwdriver blade	0.6 x 3.5
Plugging cycles	25		

## Material data

Insulating material	PA GF	Colour	black
Colour chart (similar)	RAL 9011	Insulating material group	II
Comparative Tracking Index (CTI)	≥ 500	UL 94 flammability rating	V-0
Contact base material	Copper alloy	Contact material	Copper alloy
Contact surface	tinned	Layer structure of plug contact	4...6 μm Sn glossy
Storage temperature, min.	-40 °C	Storage temperature, max.	70 °C
Operating temperature, min.	-50 °C	Operating temperature, max.	125 °C
Temperature range, installation, min.	-25 °C	Temperature range, installation, max.	125 °C

## Conductors suitable for connection

Clamping range, min.	0.2 mm <sup>2</sup>
Clamping range, max.	6 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 22
Wire connection cross section AWG, max.	AWG 8
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	6 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.5 mm <sup>2</sup>
Flexible, max. H05(07) V-K	10 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, 0.25 mm <sup>2</sup> min.	
w. plastic collar ferrule, DIN 46228 pt 4, 6 mm <sup>2</sup> max.	
w. wire end ferrule, DIN 46228 pt 1, 0.25 mm <sup>2</sup> min.	

Creation date September 6, 2023 2:25:57 PM CEST

## SVZ 7.62HP/03/180RSH180I SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

w. wire end ferrule, DIN 46228 pt 1, max.	6 mm <sup>2</sup>															
Plug gauge in accordance with EN 60999 a x b; ø	2.8 mm x 2.0 mm; 2.4 mm															
Clampable conductor	<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>0.5 mm<sup>2</sup></td> </tr> <tr> <td rowspan="2">wire end ferrule</td> <td>Stripping length</td> <td>nominal 14 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H0.5/18 OR</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	0.5 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 14 mm	Recommended wire-end ferrule	<a href="#">H0.5/18 OR</a>				
	Cross-section for conductor connection	Type	fine-wired													
		nominal	0.5 mm <sup>2</sup>													
	wire end ferrule	Stripping length	nominal 14 mm													
		Recommended wire-end ferrule	<a href="#">H0.5/18 OR</a>													
	<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>1 mm<sup>2</sup></td> </tr> <tr> <td rowspan="2">wire end ferrule</td> <td>Stripping length</td> <td>nominal 15 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H1.0/18 GE</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	1 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 15 mm	Recommended wire-end ferrule	<a href="#">H1.0/18 GE</a>				
	Cross-section for conductor connection	Type	fine-wired													
		nominal	1 mm <sup>2</sup>													
	wire end ferrule	Stripping length	nominal 15 mm													
		Recommended wire-end ferrule	<a href="#">H1.0/18 GE</a>													
	<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>1.5 mm<sup>2</sup></td> </tr> <tr> <td rowspan="4">wire end ferrule</td> <td>Stripping length</td> <td>nominal 15 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H1.5/18D SW</a></td> </tr> <tr> <td>Stripping length</td> <td>nominal 12 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H1.5/12</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	1.5 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 15 mm	Recommended wire-end ferrule	<a href="#">H1.5/18D SW</a>	Stripping length	nominal 12 mm	Recommended wire-end ferrule	<a href="#">H1.5/12</a>
	Cross-section for conductor connection	Type	fine-wired													
	nominal	1.5 mm <sup>2</sup>														
wire end ferrule	Stripping length	nominal 15 mm														
	Recommended wire-end ferrule	<a href="#">H1.5/18D SW</a>														
	Stripping length	nominal 12 mm														
	Recommended wire-end ferrule	<a href="#">H1.5/12</a>														
<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>0.75 mm<sup>2</sup></td> </tr> <tr> <td rowspan="2">wire end ferrule</td> <td>Stripping length</td> <td>nominal 14 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H0.75/18 W</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	0.75 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 14 mm	Recommended wire-end ferrule	<a href="#">H0.75/18 W</a>					
Cross-section for conductor connection	Type	fine-wired														
	nominal	0.75 mm <sup>2</sup>														
wire end ferrule	Stripping length	nominal 14 mm														
	Recommended wire-end ferrule	<a href="#">H0.75/18 W</a>														
<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>2.5 mm<sup>2</sup></td> </tr> <tr> <td rowspan="4">wire end ferrule</td> <td>Stripping length</td> <td>nominal 14 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H2.5/19D BL</a></td> </tr> <tr> <td>Stripping length</td> <td>nominal 12 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H2.5/12</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	2.5 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 14 mm	Recommended wire-end ferrule	<a href="#">H2.5/19D BL</a>	Stripping length	nominal 12 mm	Recommended wire-end ferrule	<a href="#">H2.5/12</a>	
Cross-section for conductor connection	Type	fine-wired														
	nominal	2.5 mm <sup>2</sup>														
wire end ferrule	Stripping length	nominal 14 mm														
	Recommended wire-end ferrule	<a href="#">H2.5/19D BL</a>														
	Stripping length	nominal 12 mm														
	Recommended wire-end ferrule	<a href="#">H2.5/12</a>														
<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>4 mm<sup>2</sup></td> </tr> <tr> <td rowspan="4">wire end ferrule</td> <td>Stripping length</td> <td>nominal 12 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H4.0/12</a></td> </tr> <tr> <td>Stripping length</td> <td>nominal 14 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H4.0/20D GR</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	4 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 12 mm	Recommended wire-end ferrule	<a href="#">H4.0/12</a>	Stripping length	nominal 14 mm	Recommended wire-end ferrule	<a href="#">H4.0/20D GR</a>	
Cross-section for conductor connection	Type	fine-wired														
	nominal	4 mm <sup>2</sup>														
wire end ferrule	Stripping length	nominal 12 mm														
	Recommended wire-end ferrule	<a href="#">H4.0/12</a>														
	Stripping length	nominal 14 mm														
	Recommended wire-end ferrule	<a href="#">H4.0/20D GR</a>														
<table border="1"> <tr> <td>Cross-section for conductor connection</td> <td>Type</td> <td>fine-wired</td> </tr> <tr> <td></td> <td>nominal</td> <td>6 mm<sup>2</sup></td> </tr> <tr> <td rowspan="4">wire end ferrule</td> <td>Stripping length</td> <td>nominal 14 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H6.0/20 SW</a></td> </tr> <tr> <td>Stripping length</td> <td>nominal 12 mm</td> </tr> <tr> <td>Recommended wire-end ferrule</td> <td><a href="#">H6.0/12</a></td> </tr> </table>	Cross-section for conductor connection	Type	fine-wired		nominal	6 mm <sup>2</sup>	wire end ferrule	Stripping length	nominal 14 mm	Recommended wire-end ferrule	<a href="#">H6.0/20 SW</a>	Stripping length	nominal 12 mm	Recommended wire-end ferrule	<a href="#">H6.0/12</a>	
Cross-section for conductor connection	Type	fine-wired														
	nominal	6 mm <sup>2</sup>														
wire end ferrule	Stripping length	nominal 14 mm														
	Recommended wire-end ferrule	<a href="#">H6.0/20 SW</a>														
	Stripping length	nominal 12 mm														
	Recommended wire-end ferrule	<a href="#">H6.0/12</a>														

Reference text      The outside diameter of the plastic collar should not be larger than the pitch (P), Length of ferrules is to be chosen depending on the product and the rated voltage.

## SVZ 7.62HP/03/180RSH180I SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data


### Rated data acc. to IEC

tested acc. to standard	IEC 60664-1, IEC 61984	Rated current, min. number of poles (Tu=20°C)	57 A
Rated current, max. number of poles (Tu=20°C)	41 A	Rated current, min. number of poles (Tu=40°C)	41 A
Rated current, max. number of poles (Tu=40°C)	41 A	Rated voltage for surge voltage class / pollution degree II/2	1,000 V
Rated voltage for surge voltage class / pollution degree III/2	1,000 V	Rated voltage for surge voltage class / pollution degree III/3	800 V
Rated impulse voltage for surge voltage class/ pollution degree II/2	6 kV	Rated impulse voltage for surge voltage class/ pollution degree III/2	8 kV
Rated impulse voltage for surge voltage class/ contamination degree III/3	8 kV	Short-time withstand current resistance	3 x 1s with 420 A
Clearance, min.	13.56 mm	Creepage distance, min.	13.8 mm

### Rated data acc. to CSA

Rated voltage (Use group B / CSA)	600 V	Rated voltage (Use group C / CSA)	600 V
Rated voltage (Use group D / CSA)	600 V	Rated current (Use group B / CSA)	35 A
Rated current (Use group C / CSA)	35 A	Rated current (Use group D / CSA)	5 A
Wire cross-section, AWG, min.	AWG 24	Wire cross-section, AWG, max.	AWG 10

### Rated data acc. to UL 1059

Institute (cURus)		Certificate No. (cURus)	E60693
Rated voltage (Use group B / UL 1059)	600 V	Rated voltage (Use group C / UL 1059)	600 V
Rated voltage (Use group D / UL 1059)	600 V	Rated current (Use group B / UL 1059)	42 A
Rated current (Use group C / UL 1059)	42 A	Rated current (Use group D / UL 1059)	5 A
Wire cross-section, AWG, min.	AWG 24	Wire cross-section, AWG, max.	AWG 8
Reference to approval values	Specifications are maximum values, details - see approval certificate.		

### Packing

Packaging	Box	VPE length	337 mm
VPE width	149 mm	VPE height	89 mm

### Type tests

Test: Durability of markings	Standard	DIN EN 61984 section 7.3.2 / 09.02 taking pattern from DIN EN 60068-2-70 / 07.96
	Test	mark of origin, type identification, pitch, type of material
	Evaluation	available
	Test	durability
Test: Misengagement (Non-interchangeability)	Evaluation	passed
	Standard	DIN EN 61984 section 6.3 and 6.9.1 / 09.02, DIN EN 60512-13-5 / 11.08
	Test	180° turned with coding elements
	Test	180° turned without coding elements
Evaluation	passed	

**SVZ 7.62HP/03/180RSH180I SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

Test: Clampable cross section	Standard	DIN EN 60999-1 section 7 and 9.1 / 12.00, DIN EN 60947-1 section 8.2.4.5.1 / 12.02	
	Conductor type	Type of conductor and conductor cross-section	solid 0.5 mm <sup>2</sup>
		Type of conductor and conductor cross-section	stranded 0.5 mm <sup>2</sup>
		Type of conductor and conductor cross-section	solid 6 mm <sup>2</sup>
		Type of conductor and conductor cross-section	stranded 6 mm <sup>2</sup>
		Type of conductor and conductor cross-section	AWG 24/1
		Type of conductor and conductor cross-section	AWG 24/19
		Type of conductor and conductor cross-section	AWG 10/1
		Type of conductor and conductor cross-section	AWG 10/19
Evaluation	passed		
Test for damage to and accidental loosening of conductors	Standard	DIN EN 60999-1 section 7 and 9.1 / 12.00	
	Requirement	0.2 kg	
	Conductor type	Type of conductor and conductor cross-section	AWG 24/1
		Type of conductor and conductor cross-section	AWG 24/19
	Evaluation	passed	
	Requirement	0.3 kg	
	Conductor type	Type of conductor and conductor cross-section	solid 0.5 mm <sup>2</sup>
		Type of conductor and conductor cross-section	stranded 0.5 mm <sup>2</sup>
	Evaluation	passed	
	Requirement	1.4 kg	
	Conductor type	Type of conductor and conductor cross-section	solid 6 mm <sup>2</sup>
		Type of conductor and conductor cross-section	stranded 6 mm <sup>2</sup>
		Type of conductor and conductor cross-section	AWG 10/1
Type of conductor and conductor cross-section		AWG 10/19	
Evaluation	passed		

## SVZ 7.62HP/03/180RSH180I SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

Pull-out test	Standard	DIN EN 60999-1 section 9.5 / 12.00		
	Requirement	≥10 N		
	Conductor type	Type of conductor and conductor cross-section	AWG 24/1	
		Type of conductor and conductor cross-section	AWG 24/19	
	Evaluation	passed		
	Requirement	≥20 N		
	Conductor type	Type of conductor and conductor cross-section	solid 0.5 mm <sup>2</sup>	
		Type of conductor and conductor cross-section	stranded 0.5 mm <sup>2</sup>	
	Evaluation	passed		
	Requirement	≥80 N		
	Conductor type	Type of conductor and conductor cross-section	solid 6 mm <sup>2</sup>	
		Type of conductor and conductor cross-section	stranded 6 mm <sup>2</sup>	
		Type of conductor and conductor cross-section	AWG 10/1	
		Type of conductor and conductor cross-section	AWG 10/19	
	Evaluation	passed		

## Classifications

ETIM 6.0	EC002638	ETIM 7.0	EC002638
ETIM 8.0	EC002638	ETIM 9.0	EC002638
ECLASS 9.0	27-44-03-09	ECLASS 9.1	27-44-03-09
ECLASS 10.0	27-44-03-09	ECLASS 11.0	27-46-02-02
ECLASS 12.0	27-46-02-02	ECLASS 13.0	27460202

## Important note

IPC conformity      Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

## Notes

- Additional variants on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

**Data sheet**

**SVZ 7.62HP/03/180RSH180I SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E60693

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">Declaration of the Manufacturer</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Product Change Notification	<a href="#">PCN_2016_275_PL33_plugable_SIBL_EN</a> <a href="#">PCN_2016_275_PL33_Steckbare_SIBL_DE</a>
User Documentation	<a href="#">QR-Code product handling video</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	<a href="#">FL DRIVES EN</a> <a href="#">MB DEVICE MANUF. EN</a> <a href="#">FL DRIVES DE</a> <a href="#">FL HEATING ELECTR EN</a> <a href="#">FL APPL INVERTER EN</a> <a href="#">FL BASE STATION EN</a> <a href="#">FL ELEVATOR EN</a> <a href="#">FL POWER SUPPLY EN</a> <a href="#">FL 72H SAMPLE SER EN</a> <a href="#">PO OMNIMATE EN</a> <a href="#">PO OMNIMATE EN</a>

**SVZ 7.62HP/03/180RSH180I SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**


**Product image**




**Dimensional drawing**

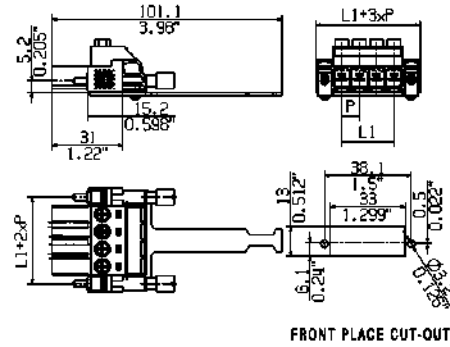

**Graph**

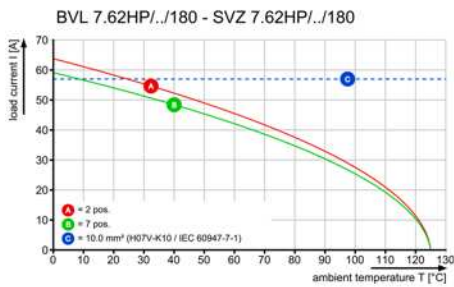

**Graph**

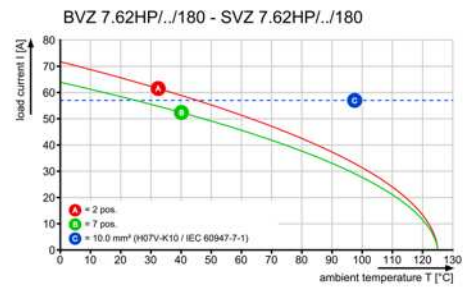

## SVZ 7.62HP/03/180RSH180I SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

# Accessories

## Coding elements



### The pluggable connections for power electronics - optimised for modern drive technologies, e.g. motor starters, frequency converters and servo-controllers.

OMNIMATE Power sets the new standard – with increased safety and innovative solutions such as the pluggable shield, integrated signal contacts and one-handed operation.

The three product lines offer you further advantages:

- Application-oriented scalability: from the compact 4 mm<sup>2</sup> connector for 29 A (IEC) or 20 A (UL) up to the sturdy 16 mm<sup>2</sup> connector for 76 A (IEC) or 54 A (UL)
- Unlimited usage up to 1,000 V (IEC) or 600 V (UL)
- A variety of application optimised mounting options

Our Service:

Design your individual connectors simply by using the





## General ordering data

Type	BV/SV 7.62HP KO	Version	Product data	Packaging
Order No.	<a href="#">1937590000</a>	PCB plug-in connector, Accessories, Coding element, black, Number		Box
GTIN (EAN)	4032248608881	of poles: 1		
Qty.	50 pc(s).			

MASSE OHNE TOLERANZ SIND KEINE PRUEFMASSE  
 DIMS. WITHOUT TOLERANCE ARE NOT CONTROL DIMS.

SVZ 7.62HP/...SH180

DIE DEUTSCHE VERSION IST VERBINDLICH  
 THE GERMAN VERSION IS BINDING

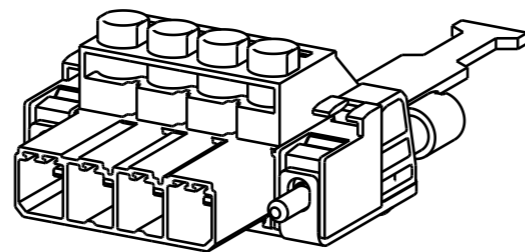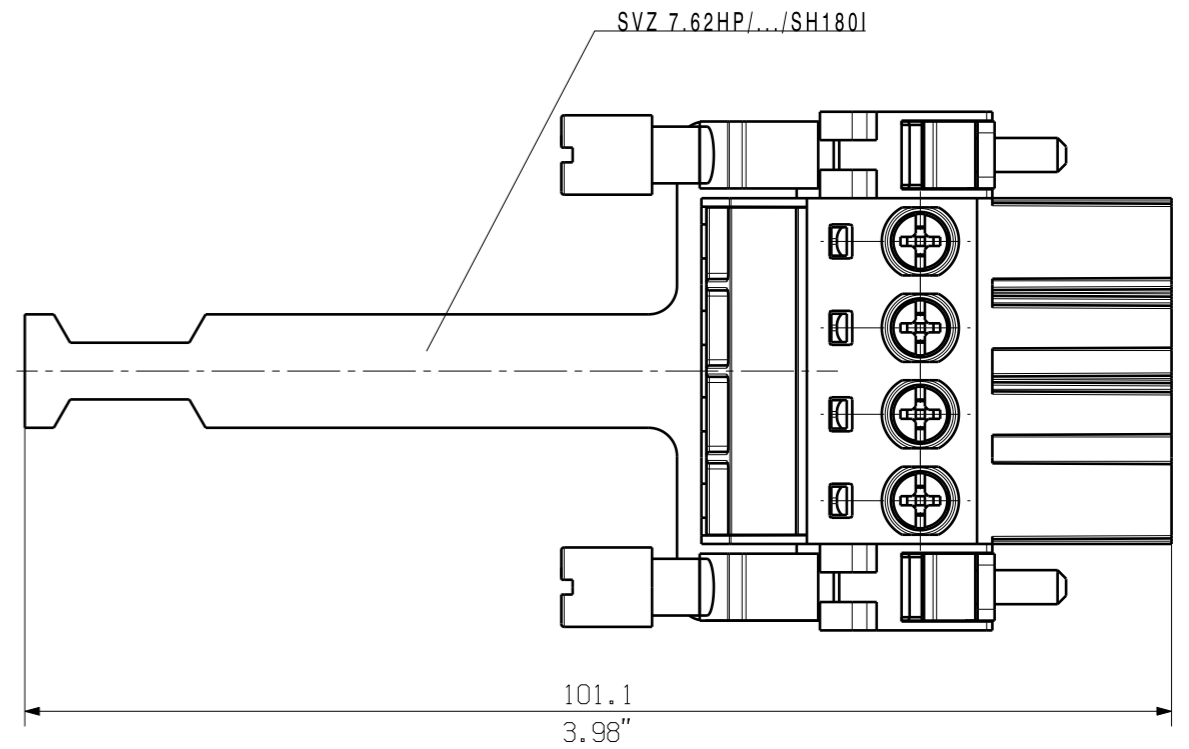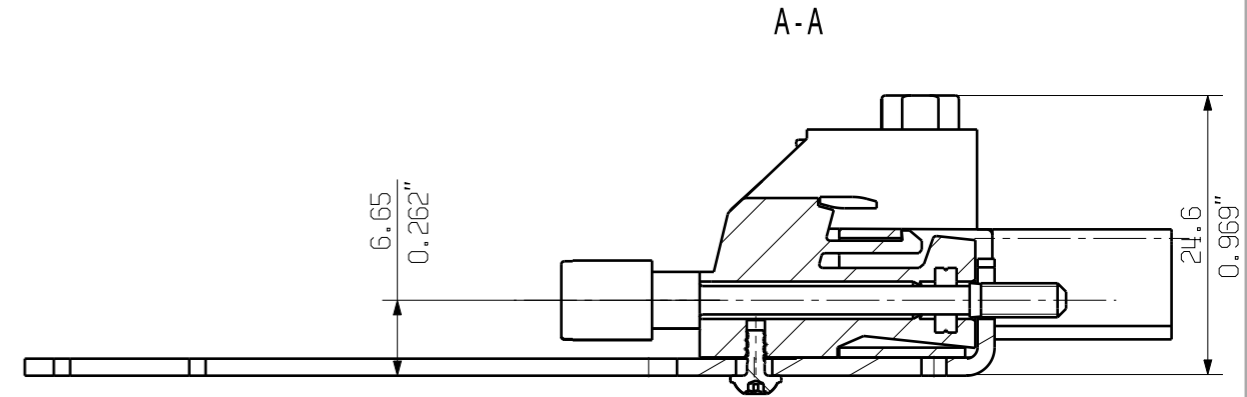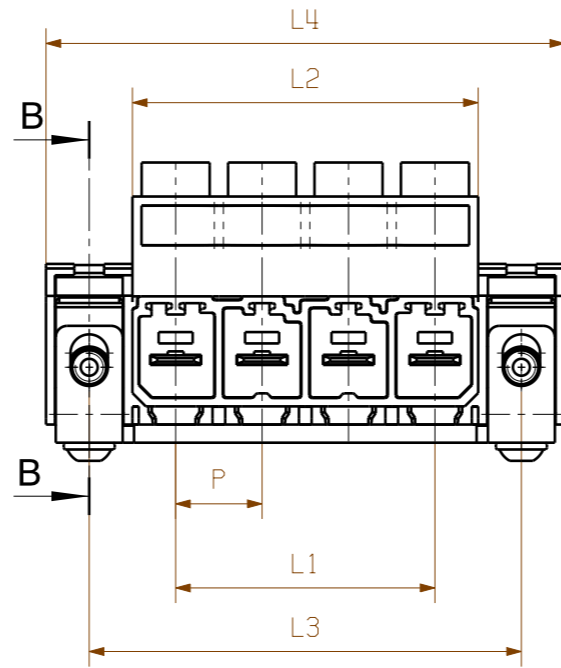

SVZ 7.62HP/...SH180

6	38,10	1,50	45,72	1,80	53,34	2,10	60,96	2,40
5	30,48	1,20	38,10	1,50	45,72	1,80	53,34	2,10
4	22,86	0,90	30,48	1,20	38,10	1,50	45,72	1,80
3	15,24	0,60	22,86	0,90	30,48	1,20	38,10	1,50
n	L1 (mm)	L1 (Inch)	L2 (mm)	L2 (Inch)	L3 (mm)	L3 (Inch)	L4 (mm)	L4 (Inch)

For the mounting on PCBs, it should be noted that the rated data given in the catalogue relates only to the connection elements.

The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to VDE 0110.

The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller connectors are tested to the DIN VDE 0627 standard, and are valid for its field of application. Provided that the connectors are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

	DIN ISO 2768-m		CAT.NO.: .	
	83639/4 07.09.15 KRUG_M	01		
MODIFICATION		DATE	NAME	<b>C 42191 04</b> DRAWING NO. ISSUE NO. SHEET 01 OF 02 SHEETS
	DRAWN	04.05.2007	HOHLBEIN_K	<b>SVZ 7.62HP/...SH...I</b> STIFTSTECKER MALE PLUG
SCALE: 1.5/1	RESPONSIBLE		KRUG_M	
SUPERSEDES: -	CHECKED	24.09.2015	HERTEL_S	
SUPERSEDED BY: .	APPROVED		LANG_T	PRODUCT FILE: SV/BVZ 7.62 HP 7340

WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRUECKLICH GESTATTET.  
 ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENSERSATZ. ALLE RECHTE FUER DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTEREINTRAGUNG VORBEHALTEN.  
 THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED.  
 OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN.