


D

C

B

A

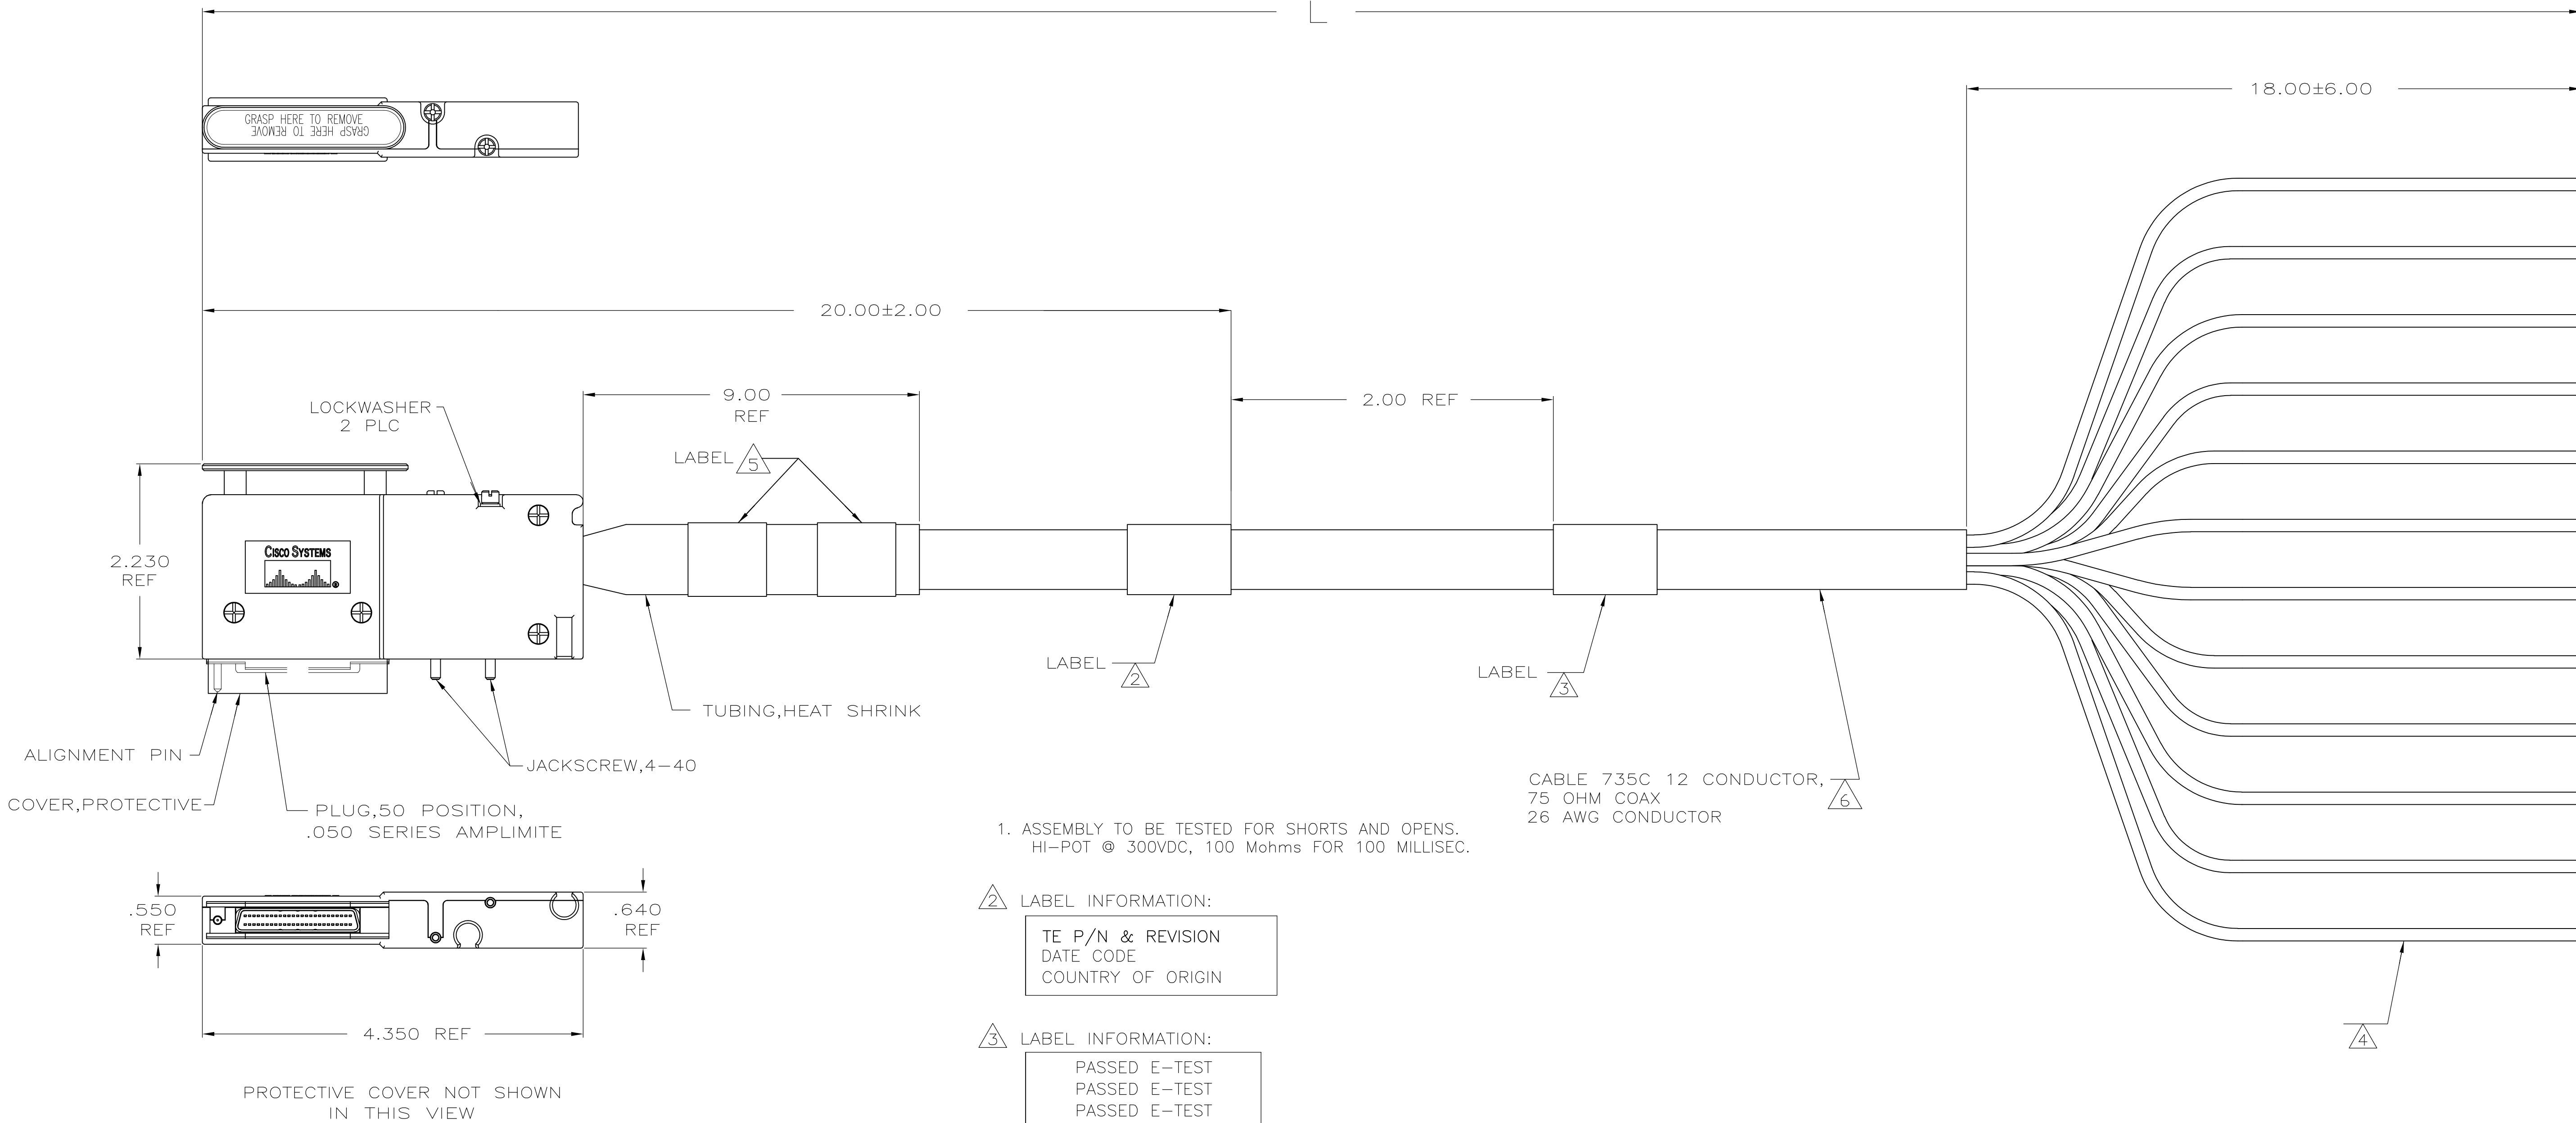

1. ASSEMBLY TO BE TESTED FOR SHORTS AND OPENS.
HI-POT @ 300VDC, 100 Mohms FOR 100 MILLISEC.

2 LABEL INFORMATION:
TE P/N & REVISION
DATE CODE
COUNTRY OF ORIGIN

3 LABEL INFORMATION:
PASSED E-TEST
PASSED E-TEST
PASSED E-TEST

4 INDIVIDUAL COAX LINE NUMBERS WILL BE TERMINATED
TO CORRESPONDING PORT NUMBER.
SEE WIRING CHART FOR DETAIL.

5 LABEL INFORMATION:
DO NOT USE
CABLE TO MATE
OR UNMATE

TEXT MUST BE ORIENTED SO THAT IT IS
VISABLE WITH THE TOP OF THE CONNECTOR BEING
VIEWED FROM ABOVE (OPPOSITE SIDE OF INTERFACE)

6 FLAME CLASS RATING PER NEC - CMG,
TEMPERATURE RATING PER NEC - 75°C

7 CABLE ASSEMBLIES THAT ARE SPOOLED ARE TO BE PACKAGED, SO THAT THE
CONNECTORIZED END THAT MATES TO THE SWITCH, IS THE LAST PORTION OF
THE CABLE THAT IS WRAPPED ON THE SPOOL. WHEN THE CABLE IS TO BE DEPLOYED
IT CAN ONLY BE UNWOUND FROM THE SPOOL FROM THE CONNECTORIZED END OUT
TOWARDS THE UNTERMINATED END.

8 CABLE TO BE TESTED FOR INDIVIDUAL COAX SHIELD CONTINUITY TO BACKSHELL.

CABLE SIGNAL	AMPLIMITE POSITION	AMPLIMITE POSITION	CABLE SHIELD	COAX LINE NO.
PORT 1	1	3	PORT 1	1
PORT 2	5	7	PORT 2	2
PORT 3	9	11	PORT 3	3
PORT 4	13	15	PORT 4	4
PORT 5	17	19	PORT 5	5
PORT 6	21	23	PORT 6	6
PORT 7	26	28	PORT 7	7
PORT 8	30	32	PORT 8	8
PORT 9	34	36	PORT 9	9
PORT 10	38	40	PORT 10	10
PORT 11	42	44	PORT 11	11
PORT 12	46	48	PORT 12	12

7	225±4 FEET	1-1979525-0
7	200±4 FEET	1979525-9
7	175±3 FEET	1979525-8
7	150±3 FEET	1979525-7
7	125±3 FEET	1979525-6
7	100±3 FEET	1979525-5
7	75±3 FEET	1979525-4
	50±2 FEET	1979525-3
	25±1 FEET	1979525-2
	10±1 FEET	1979525-1
	L	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.C. CLAYBAUGH CHK G.GUTGOLD	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.GUTGOLD
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC APPLICATION SPEC		NAME
MATERIAL -		FINISH -		SIZE A1
WEIGHT -		CUSTOMER DRAWING		RESTRICTED TO -
SCALE N.T.S.		SHEET 1 OF 1		REV B