MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
1XE3–4

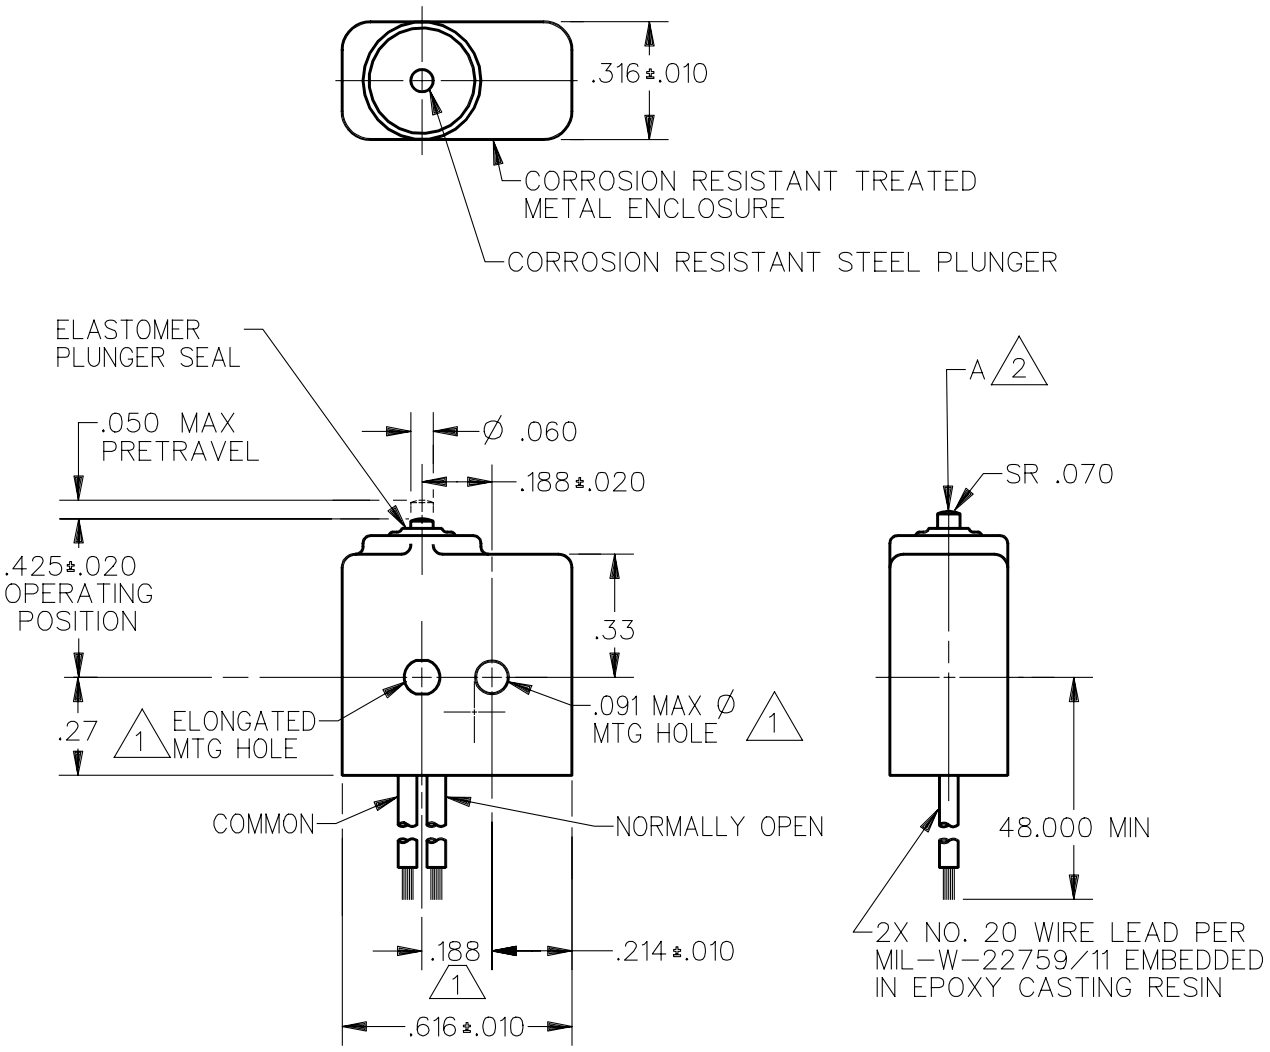

NOTES
1. MOUNTING HOLES WILL ACCEPT .087 MAX Ø PINS OR SCREWS ON .188±.002 CENTERS
2. ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
3. WEIGHT OF SWITCH ONLY IS .16 OZ MAX WEIGHT OF SWITCH WITH WIRE LEADS IS .90 OZ MAX

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE 2:1 — DO NOT SCALE PRINT
OPERATING FORCE — — — — 5–17 OZ	CONTACT ARRANGEMENT S P N O	**UNLESS OTHERWISE SPECIFIED TOLERANCES ARE**
RELEASE FORCE — — — — 4 OZ MIN	28 VOLTS DC RATING	ONE PLACE (.0) ±.030
RELEASE TRAVEL — — — — .004 MIN	INDUCTIVE — — — SEA LEVEL — — — 4 AMP	TWO PLACE (.00) ±.015
DIFFERENTIAL TRAVEL — — — .005 MAX	50,000 FT — 2.5 AMP	THREE PLACE (.000) ±.005
OVERTRAVEL — — — — — — .004 MIN	RESISTIVE — — — SEA LEVEL — — — 7 AMP	ANGLES ±
	50,000 FT — — — 7 AMP	WEIGHT 3
	MAXIMUM INRUSH — — — — — — 24 AMP	

CATALOG LISTING 1XE3–4 PAGE 1 OF 1
ISSUE 2
RELEASE NO. PR–19628 REPLACES
REVISIONS
A CO–94274 J J A 23 MAR 99

	CHECK	CHECK	DAW 7 OCT 91	CHECK	TSM 4 OCT 91

DDM/CAD DRAWN