





EDZ 1550

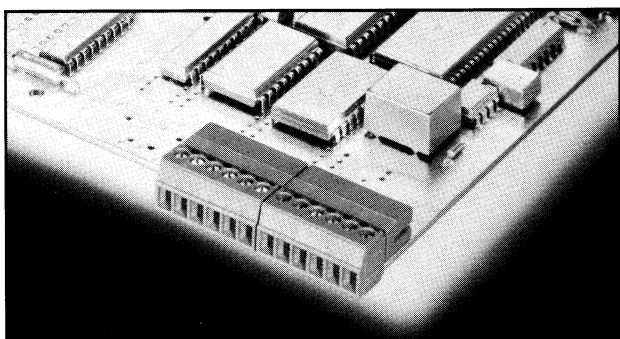

2-16 poles, Spacing 3.81 mm
insert required no. of poles ••
How to order see page 6

Ratings:

*Approvals pending

	 *	 *	 *
	UL1059	CSA 22.2 No. 158	DIN VDE 0627
Rated Voltage	125 VB	150 VB	125 V
Rated Current	8 A	8 A	8 A (T60)
Wire Size	AWG 28-16	AWG 28-16	1.5 mm²
Test Voltage			1.39 kV
Rated Torque/Screw Size			0.25 Nm/M2

Rated Cross Section

Single Wire (solid)	1.5 mm ²
Stranded Wire (flexible)	1.0 mm ²
Stranded wire with Ferrules	1.0 mm ²

Dimensions

Spacing	3.81 mm
Stripped Length	7.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Color	Green

