


TABLE 1 ,DIM INFORMATION

DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B
-00X 06 XX LF	06	2.54	10.11	
-00X 10 XX LF	10	5.08	12.65	
-00X 12 XX LF	12	6.35	13.92	
-00X 14 XX LF	14	7.62	15.19	
-00X 16 XX LF	16	8.89	16.46	
-00X 20 XX LF	20	11.43	19.00	
-00X 22 XX LF	22	12.70	20.27	
-00X 26 XX LF	26	15.24	22.81	
-00X 30 XX LF	30	17.78	25.35	

DASH No.	Dim.	Amount of Pins	Dim.A	Dim.B
-00X 34 XX LF	34	20.32	27.89	
-00X 40 XX LF	40	24.13	31.70	
-00X 44 XX LF	44	26.67	34.24	
-00X 50 XX LF	50	30.48	38.05	
-00X 60 XX LF	60	36.83	44.40	
-00X 64 XX LF	64	39.37	46.94	
-00X 68 XX LF	68	41.91	49.48	
-00X 80 XX LF	80	49.53	57.10	
-00X A0 XX LF	100	62.23	69.90	






FOR 6-40 POS.

FOR 40-100 POS.

DIM. A	2-60 PINS	± 0.20
	62-100 PINS	± 0.30

mat'l. code	surface ISO1302 ✓	tolerance ISO1101 ISO406	projection MM	product family MINITEK
ltn ecn nodr	date	tolerances unless otherwise specified	angle 0°±2'	title 1.27X1.27MM BTB HEADER UNSHROUDED SMT
H BX-N-011951 ZK	06/15/12	0.X±0.38		
J BX-N-14099 TIM	02/25/13	0.XX±0.25		
		0.XXX±0.10	scale 5:1	
D T11-0028 S.LIN	11/06/10	dr STERLING LIN	09/15/09	dwg no
E BX-N-010364 ZK	01/18/12	engr STERLING LIN	09/15/09	sheet 1 of 2
F BX-N-010621 ZK	03/12/12	chr GRAY HSIEH	09/15/09	size A4
G BX-N-011182 ZK	03/31/12	appd JOSEPH	09/15/09	type Product Customer Drawing
sheet index	revision	J		
	sheet	1	2	

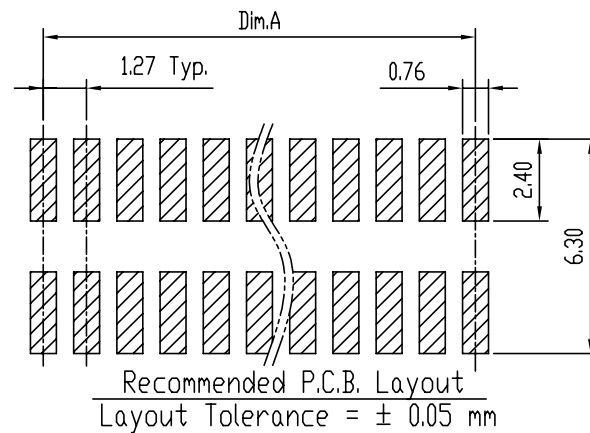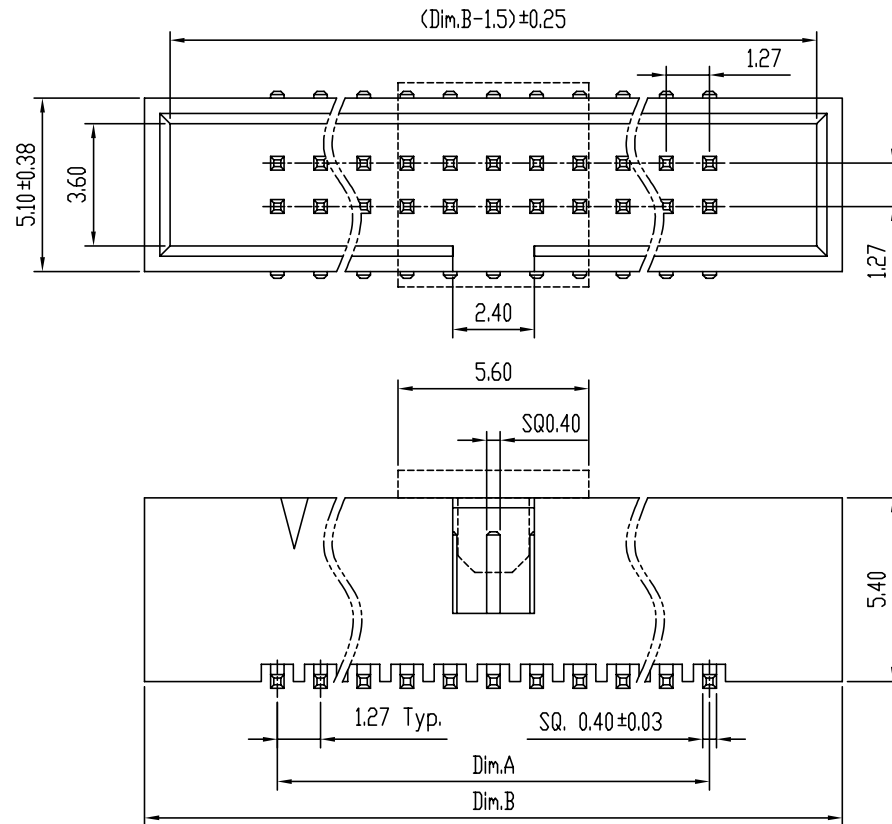

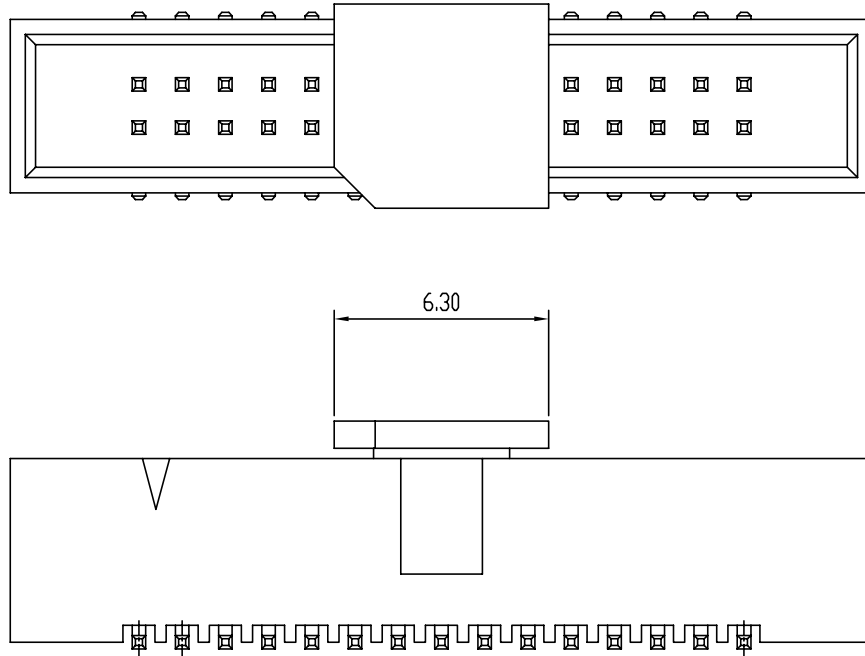

CONFIG 1: 20021521-001XXXXLF
WITH EDGE CUT CAP, OTHER DIMENSIONS SEE SHEET 1

NOTE:

- MATERIAL,
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, $SQ=0.40\pm0.03MM$
- FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER $1\mu m(40u'')$ MIN Ni OVER ALL
- SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
- THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 10 SEC. IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN.
- PRODUCT NUMBERING:
20021521 - 0 0 X XX X X LF

LEAD FREE

PLATING:

1:GOLD FLASH ALL OVER

4:0.25um(10U'')GOLD AT CONTACT

8:0.76um(30U'')GOLD AT CONTACT

9:1u" GOLD OVER 30u" PdNi AT CONTACT

PACKING

T: TUBE

D: TUBE+CAP

C: REEL +CAP


PIN COUNT

SEE TABLE 1

CONFIG

0: NORMAL

1: CONFIG 1

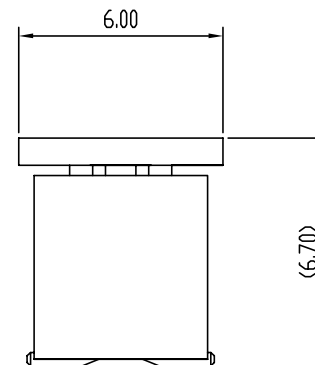

mat'l. code			surface		tolerance		projection		product family		
			ISO1302		ISO1101 ISO406		MM		MINITEK		
l t r e c n n o d r			date		tolerances unless otherwise specified		title				
J					0.X±0.38		scale 5:1		1.27X1.27MM BTB HEADER		
					0.XX±0.25				UNSHROUDED SMT.		
					0'±2'						
			dr		STERLING LIN		09/15/09		dwg no		
			engr		STERLING LIN		09/15/09		sheet 2 of 2		
			chr		GRAY HSIEH		09/15/09		size		
			appd		JOSEPH		09/15/09		A4		
sheet			revision						type		
index			sheet						Product Customer Drawing		