

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2010223204](#)
Status: **Active**
Overview: Slim-Grid Board-to-Board Connectors
Description: Slim-Grid Header, 4 Circuits, Through Hole, Vertical, Shrouded, 0.76µm Gold (Au) Plated, 1.60mm Tail Length, with Pick-and-Place Cap, Tube, Lead-Free

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification 2009890001-000 \(PDF\)](#) [Product Literature \(PDF\)](#)
[Packaging Specification 2010220001-000 \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179


General

Product Family PCB Headers
 Series [201022](#)
 Application Board-to-Board, Signal
 Comments 4.3 Amps per Pole with only 1 contact powered up

1.4 Amps per Pole with max contacts powered up
 Overview [Slim-Grid Board-to-Board Connectors](#)
 Product Name Slim-Grid
 UPC 889056898119

Physical

Breakaway No
 Circuits (Loaded) 4
 Circuits (maximum) 4
 Color - Resin Black
 Durability (mating cycles max) 500
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Capable No
 Guide to Mating Part Yes
 Keying to Mating Part None
 Lock to Mating Part Yes
 Material - Metal Copper Alloy
 Material - Plating Mating Gold
 Material - Plating Termination Matte Tin
 Material - Resin Liquid Crystal Polymer
 Net Weight 0.211/g
 Number of Rows 2
 Orientation Vertical
 PC Tail Length 1.60mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tube
 Pitch - Mating Interface 1.27mm
 Pitch - Termination Interface 1.27mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.000µm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Robotic Placement Pick and Place Cap

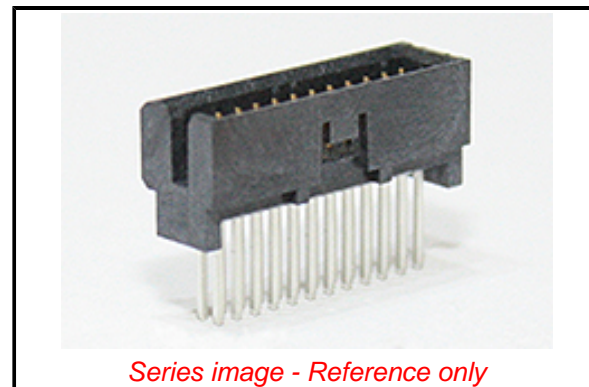

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2020)4578-DC (25
 June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[201022 Series](#)

Mates With

Slim-Grid Receptacle [78120](#)

Shrouded	Fully
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	1.4A
Voltage - Maximum	125V AC

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Packaging Specification	2010220001-000
Product Specification	2009890001-000
Sales Drawing	2010220024-000

This document was generated on 10/22/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION