



**IMPACT**

TE Internal #: 2057743-2

High Speed Backplane Connectors, Board-to-Board, 96 Position, Mating Alignment, Guide Pin Mating Alignment Type, 6 Row, 16 Column, IMPACT

[View on TE.com >](#)

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Connector System: **Board-to-Board**

Number of Positions: **96**

Row-to-Row Spacing: **1.35 mm [ .053 in ]**

Mating Alignment: **With**

Mating Alignment Type: **Guide Pin**

**Features**

**Product Type Features**

Signal Arrangement	Differential
Connector System	Board-to-Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

**Configuration Features**

Number of Ground Positions	32
Number of Pairs	32
Stackable	No
Number of Signal Positions	64
Number of Positions	96
Number of Rows	6
Number of Columns	16
PCB Mount Orientation	Vertical
Guide Location	Right

**Electrical Characteristics**

Operating Voltage	30 VAC
-------------------	--------



### Signal Characteristics

Number of Differential Pairs per Column	2
Data Rate	25 Gb/s

### Contact Features

Contact Mating Area Length	4.9 mm[.193 in]
PCB Contact Termination Area Plating Material Thickness	1.27 $\mu$ m[50 $\mu$ in]
Contact Layout	Inline
Contact Type	Pin
Contact Underplating Material Thickness	1.27 $\mu$ m[50 $\mu$ in]
Contact Mating Area Plating Material Thickness	.76 $\mu$ m[29.92 $\mu$ in]
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.75 A

### Termination Features

Termination Post & Tail Length	1.4 mm[.055 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit

### Mechanical Attachment

Guide Hardware	With
PCB Mount Alignment Type	Locating Posts
Mating Retention	Without
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail & Screw
Mating Alignment	With
Mating Alignment Type	Guide Pin
Connector Mounting Type	Board Mount

### Housing Features

Number of Shrouded Sides	3
End Wall Location	Left



Housing Material	LCP (Liquid Crystal Polymer)
Housing Color	Black
Centerline (Pitch)	1.9 mm[.075 in]

### Dimensions

Connector Length	38.3 mm[1.508 in]
Connector Height	11.95 mm[.47 in]
Connector Width	12.7 mm[.5 in]
	.039 in
PCB Hole Diameter	.39 mm[.015 in]
Row-to-Row Spacing	1.35 mm[.053 in]

### Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

### Operation/Application

Circuit Application	Signal
---------------------	--------

### Industry Standards

UL Rating	Recognized
UL File Number	E28476
CSA Certified	Yes
UL Flammability Rating	UL 94V-0

### Packaging Features

Packaging Method	Box & Tube
------------------	------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 2057411-1  
IMP100S,R,RA2P16C,UG,39

### Also in the Series | IMPACT



High Speed Backplane Connectors  
(1769)

### Customers Also Bought



TE Part #120953-2  
TE UPM Ver Receptacle 5P HC Power




TE Part #1-1600960-8  
CONT 8-10 AWG PWR, STD PLATE &



TE Part #2007837-2  
IMP100S,H,V4P16C,UG,LEW39,4.9



TE Part #2007839-2  
IMP100S,H,V4P16C,UG,REW39,4.9

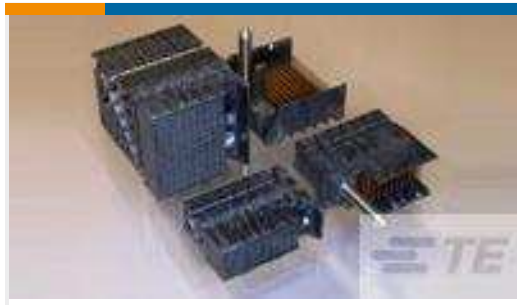

TE Part #2057439-2  
IMP100S,H,V4P8C,RG,OEW39,4.9



TE Part #2329186-1  
HM-EZD+,2PAIRS,10COLS,VERTICAL, ASSEMBLY



TE Part #5-1892820-3  
SQUE REL REC ASSY W/K,4ACP

## Documents

### Product Drawings

[IMP100S,H,V2P16C,RG,LEW39,4.9](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2057743-2\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2057743-2\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2057743-2\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[Application Specification](#)

English

### Agency Approvals

[Agency Approval Document](#)

English