


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [2132271630](#)  
**Status:** **Active**  
**Overview:** [CLIK-Mate Wire-to-Board Connectors](#)  
**Description:** 1.50mm Pitch CLIK-Mate Wire-to-Board PCB Receptacle, Dual Row, Surface Mount, Vertical, 0.38µm Gold (Au) Plating, 16 Circuits, Natural

**Documents:**

|   |  |
|---|--|
| <a href="#">3D Model</a>                                      | <a href="#">Product Specification 5031491002-PS-000 (PDF)</a>    |
| <a href="#">3D Model (PDF)</a>                                | <a href="#">Packaging Specification 2132279200-SPK-200 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |
| <a href="#">Product Specification 5031490002-PS-000 (PDF)</a> |  |

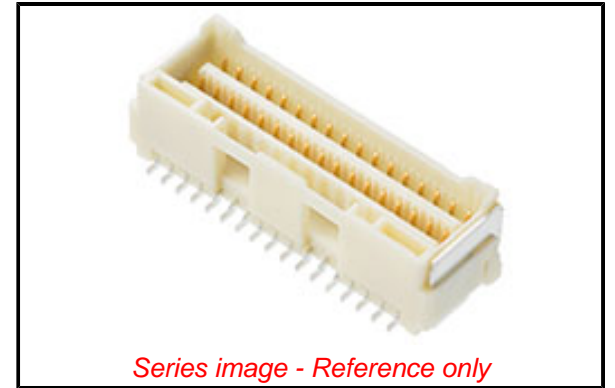

*Series image - Reference only*

**General**

|                |  |
|----------------|--|
| Product Family | PCB Receptacles                                    |
| Series         | <a href="#">213227</a>                             |
| Application    | Signal, Wire-to-Board                              |
| Overview       | <a href="#">CLIK-Mate Wire-to-Board Connectors</a> |
| Product Name   | CLIK-Mate  |
| UPC            | 193264243082                                       |

**Physical**

|                                |                       |
|--------------------------------|-----------------------|
| Circuits (Loaded)              | 16                    |
| Circuits (maximum)             | 16                    |
| Color - Resin                  | Natural               |
| Durability (mating cycles max) | 30                    |
| Glow-Wire Capable              | No                    |
| Guide to Mating Part           | Yes                   |
| Keying to Mating Part          | Yes                   |
| Lock to Mating Part            | Yes                   |
| Material - Metal               | Copper Alloy          |
| Material - Plating Mating      | Gold                  |
| Material - Resin               | Polyamide             |
| Net Weight                     | 1460.000/mg           |
| Number of Rows                 | 2                     |
| Orientation                    | Vertical              |
| PCB Locator                    | No                    |
| PCB Retention                  | Yes                   |
| Packaging Type                 | Embossed Tape on Reel |
| Pitch - Mating Interface       | 1.50mm                |
| Pitch - Termination Interface  | 1.50mm                |
| Plating min - Mating           | 0.381µm               |
| Plating min - Termination      | 0.381µm               |
| Polarized to Mating Part       | Yes                   |
| Polarized to PCB               | No                    |
| Stackable                      | No                    |
| Surface Mount Compatible (SMC) | Yes                   |
| Temperature Range - Operating  | -40° to +105°C        |
| Termination Interface: Style   | Surface Mount         |

**Electrical**

|                               |                  |
|-------------------------------|------------------|
| Current - Maximum per Contact | 2.0A             |
| Voltage - Maximum             | 100V AC (RMS)/DC |

**Material Info**

**Reference - Drawing Numbers**

|                         |   |
|-------------------------|---|
| Packaging Specification | <a href="#">2132279200-SPK-200</a>                                    |
| Product Specification   | <a href="#">5031490002-PS-000</a> , <a href="#">5031491002-PS-000</a> |

**EU ELV**

**Not Reviewed**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

**Search Parts in this Series**

[213227 Series](#)

**Mates With**

[CLIK-Mate Housing 503149](#)

This document was generated on 09/29/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**