

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [22-17-2057](#)
Status: **Active**
Overview: [KK® Interconnection System](#)
Description: 2.54mm Pitch KK® PC Board Connector, Bottom Entry, 0.80µm Gold (Au), 5 Circuits

Documents:

[3D Model](#) [Product Specification PS-10-07 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Receptacles
 Series [4455](#)
 Application Board-to-Board, Signal
 Overview [KK® Interconnection System](#)
 Product Name KK®
 UPC 800753737273

Physical

Circuits (Loaded) 5
 Circuits (maximum) 5
 Color - Resin Natural (White)
 Durability (mating cycles max) 25
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part No
 Material - Metal Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin Nylon
 Net Weight 0.620/g
 Number of Rows 1
 Orientation Bottom Entry
 PC Tail Length 3.35mm
 PCB Locator Yes
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tray
 Pitch - Mating Interface 2.54mm
 Pitch - Termination Interface 2.54mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part No
 Polarized to PCB Yes
 Stackable Yes
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 3.5A, 3.75A, 3A, 4A

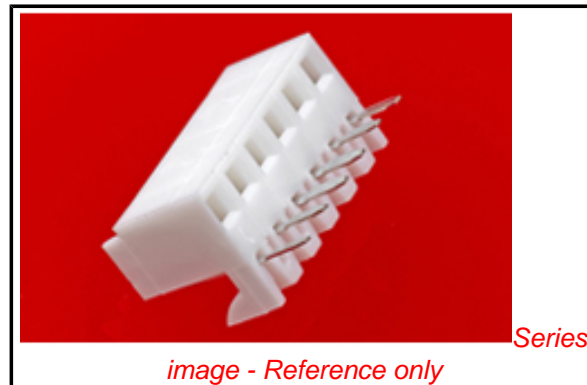


image - Reference only

Series

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[4455Series](#)

Mates With

[42153](#) KK® Wire-to-Board Header, [4094](#) KK® Wire-to-Board Header, [42376](#) KK® Header, [42375](#) KK® Header, [42377](#) , [42152](#) KK® Wire-to-Board Header, [4030](#) KK® Wire-to-Board Header, [4380](#) KK® Header

Grounding to PCB	No
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info

Old Part Number	A-4455-BH05J(228)
-----------------	-------------------

Reference - Drawing Numbers

Product Specification	PS-10-07
Sales Drawing	SDA-4455

This document was generated on 06/05/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION