

DIN rail bus connectors - TBUS8-25,0-PPPPPPP-7035 - 2202891


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail connector, nominal current: 6 A, rated voltage (III/2): 32 V, number of positions: 8, pitch: 2.54 mm, color: light gray

Your advantages

- ✓ Space-saving DIN rail mounting
- ✓ Contact design enables electronics modules to be easily snapped on
- ✓ Power supply and communication without additional wiring
- ✓ Parallel and serial contacts for signal and data transmission

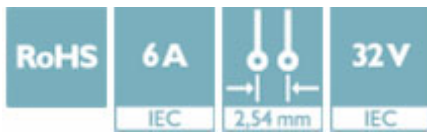

Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	
GTIN	4055626382142

Technical data

Dimensions

Length [l]	25 mm
Pitch	2.54 mm

General

Number of positions	8
Insulating material group	I
Rated surge voltage (III/2)	1.5 kV
Rated surge voltage (II/2)	1.5 kV
Rated voltage (III/2)	32 V
Rated voltage (II/2)	32 V
Nominal current I_N	6 A
Insulating material	PA

DIN rail bus connectors - TBUS8-25,0-PPPPPPPP-7035 - 2202891

Technical data

General

Flammability rating according to UL 94	V0
--	----

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>