


C-Filter D-Sub Connector  
Solder pin angled .370" (9.40 mm)  
with mounting-,  
grounding bracket  
and threaded lock

This right angle version incorporates a front locking bolt. The hexlocking bolts that are normally used are no longer required. The locking bolt is available with UNC 4-40 or M 3 internal thread.

Directive 2002/95/EC  
„RoHS“  
Compliant

( click on the schematic(s) for a more detailed view )

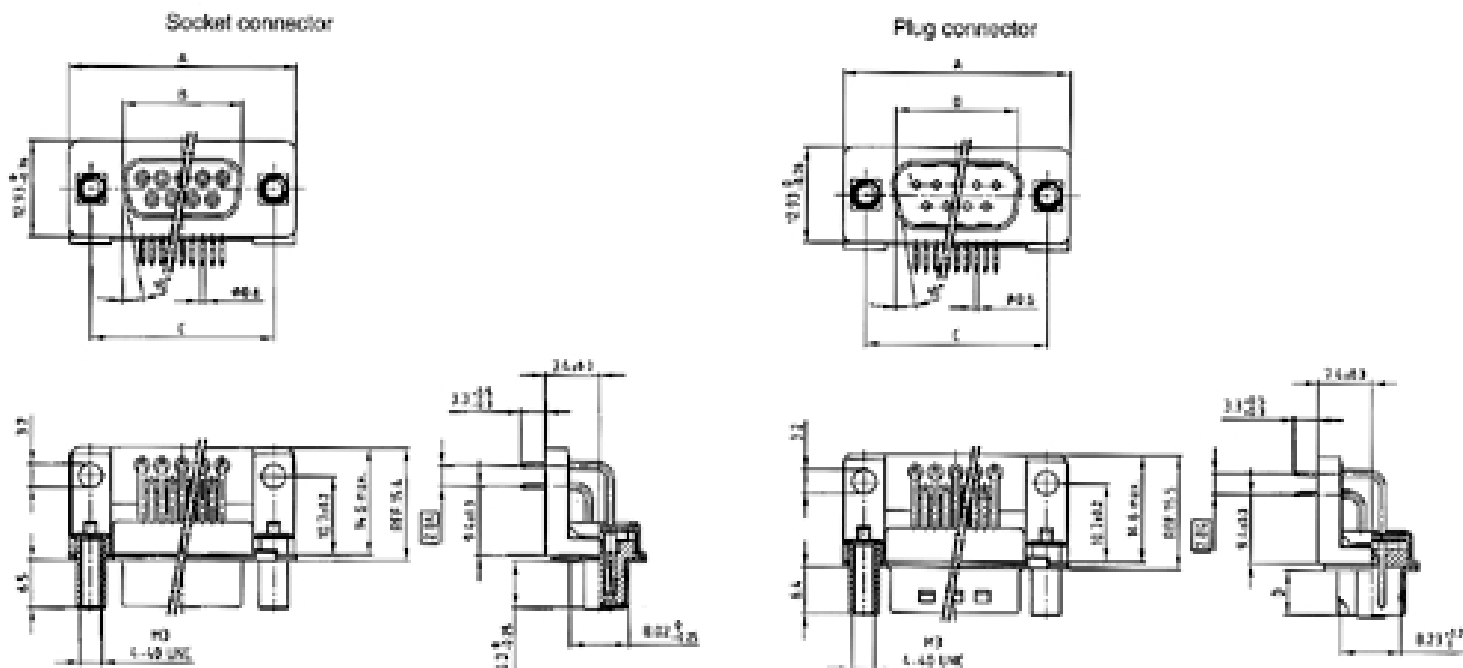

**Socket Connector**

No. of pos.	A -0,76	B -0,25	C
9	31,19	16,46	25,00 <sup>+0,12</sup> <sub>-0,13</sub>
15	39,52	24,79	33,30 <sup>+0,15</sup> <sub>-0,10</sub>
25	53,42	38,50	47,04 <sup>+0,13</sup>
37	69,70	54,96	63,50 <sup>+0,13</sup>

**Plug Connector**

No. of pos.	A -0,76	B +0,25	C	D -0,30
9	31,19	16,79	25,00 <sup>+0,12</sup> <sub>-0,13</sub>	6,12
15	39,52	25,12	33,30 <sup>+0,15</sup> <sub>-0,10</sub>	6,12
25	53,42	38,84	47,04 <sup>+0,13</sup>	5,99
37	69,70	55,30	63,50 <sup>+0,13</sup>	5,99

**Part Numbers**

No. of Pos.	Socket connector - Solder pin angled			
	180 pF	370 pF	830 pF	1300 pF
9	242 A 16900 X	242 A 11330 X	242 A 11410 X	242 A 11370 X
15	242 A 16910 X	242 A 11340 X	242 A 11420 X	242 A 11380 X
25	242 A 16920 X	242 A 11350 X	242 A 11430 X	242 A 11390 X
37	242 A 16930 X	242 A 11360 X	242 A 11440 X	242 A 11400 X
9	242 A 16940 X	242 A 11450 X	242 A 11530 X	242 A 11490 X
15	242 A 16950 X	242 A 11460 X	242 A 11540 X	242 A 11500 X
25	242 A 16960 X	242 A 11470 X	242 A 11550 X	242 A 11510 X
37	242 A 16070 X	242 A 11480 X	242 A 11560 X	242 A 11520 X

No. of Pos.	Plug connector Solder pin angled			
	180 pF	370 pF	830 pF	1300 pF
9	241 A 19520 X	241 A 11330 X	241 A 11410 X	241 A 11370 X
15	241 A 19530 X	241 A 11340 X	241 A 11420 X	241 A 11380 X
25	241 A 19540 X	241 A 11350 X	241 A 11430 X	241 A 11390 X
37	241 A 19550 X	241 A 11360 X	241 A 11440 X	241 A 11400 X
9	241 A 19560 X	241 A 11450 X	241 A 11530 X	241 A 11490 X
15	241 A 19570 X	241 A 11460 X	241 A 11540 X	241 A 11500 X
25	241 A 19580 X	241 A 11470 X	241 A 11550 X	241 A 11510 X
37	241 A 19590 X	241 A 11480 X	241 A 11560 X	241 A 11520 X



REG.-Nr. 40000441



File #: E202784



File #: LR115000