


C-Filter D-Sub Connector
Solder pin angled .590" (14.19 mm)
with threaded lock
and short metal bracket

Directive 2002/95/EC
"RoHS"
Compliant

(click on the schematic(s) for a more detailed view)

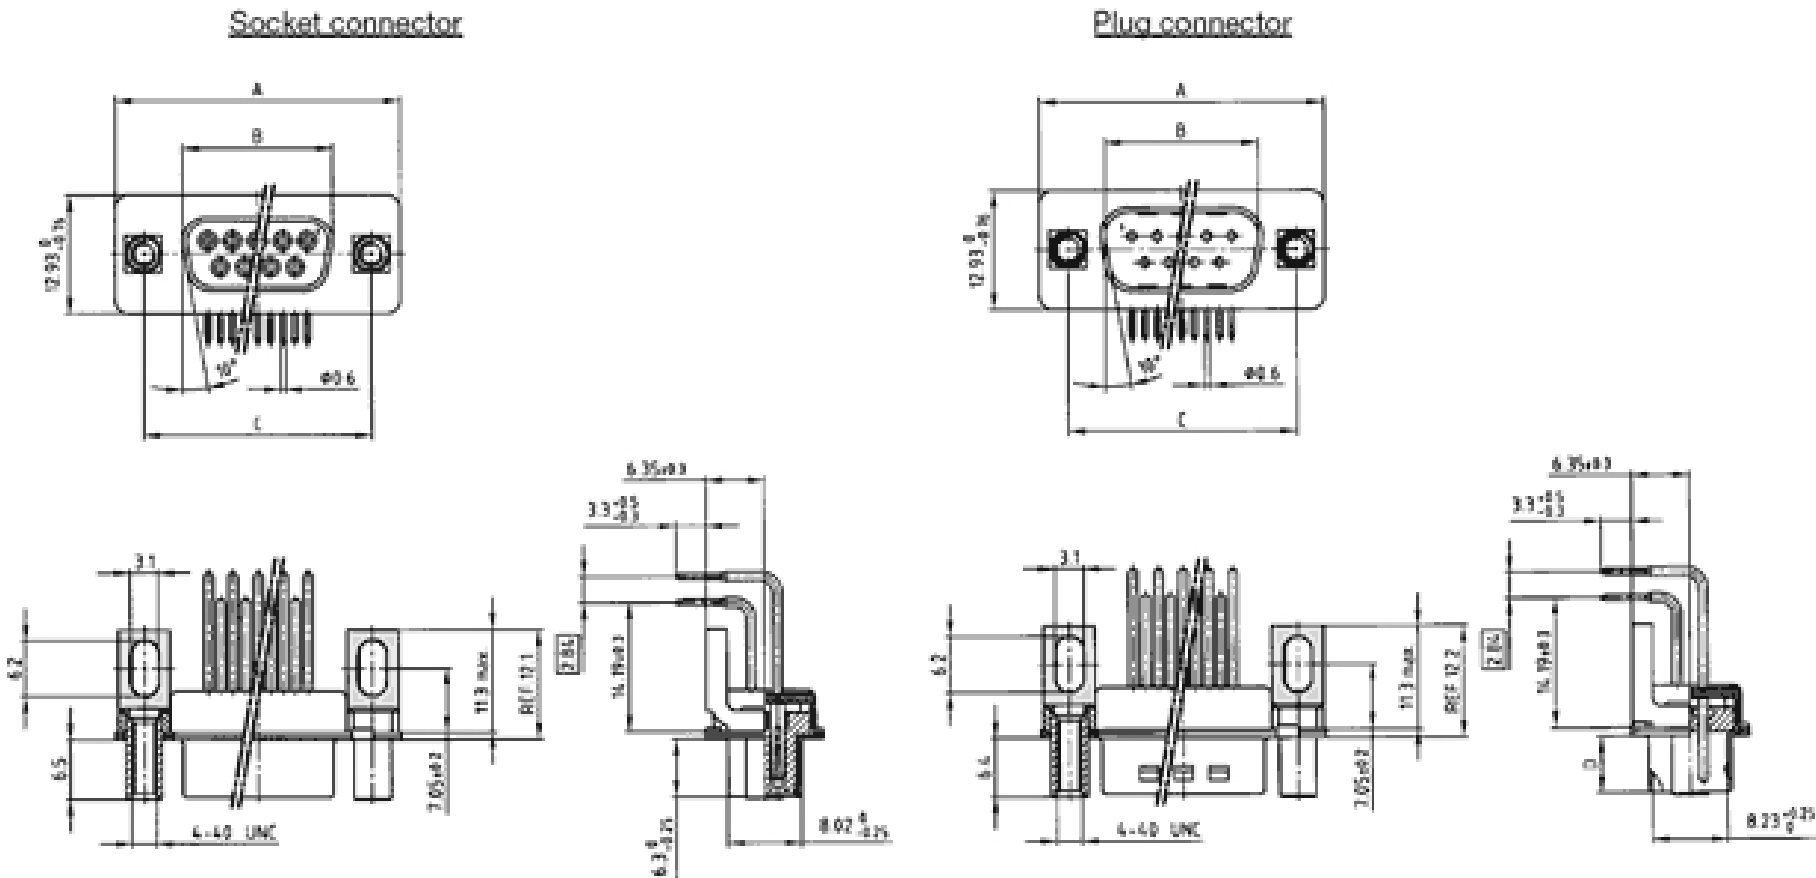

Socket Connector			
No. of pos.	A -0,76	B -0,25	C
9	31,19	16,46	25,00 ^{+0,12} _{-0,13}
15	39,52	24,79	33,30 ^{+0,15} _{-0,10}
25	53,42	38,50	47,04 ^{±0,13}
37	69,70	54,96	63,50 ^{±0,13}

Plug Connector				
No. of pos.	A -0,76	B +0,25	C	D -0,30
9	31,19	16,79	25,00 ^{+0,12} _{-0,13}	6,12
15	39,52	25,12	33,30 ^{+0,15} _{-0,10}	6,12
25	53,42	38,84	47,04 ^{±0,13}	5,99
37	69,70	55,30	63,50 ^{±0,13}	5,99

Part Numbers

No. of Pos.	Socket connector - Solder pin angled			
	180 pF	370 pF	830 pF	1300 pF
9	242 A 20930 X	242 A 20970 X	242 A 21010 X	242 A 21050 X
15	242 A 20940 X	242 A 20980 X	242 A 21020 X	242 A 21060 X
25	242 A 20950 X	242 A 20990 X	242 A 21030 X	242 A 21070 X
37	242 A 20960 X	242 A 21000 X	242 A 21040 X	242 A 21080 X

No. of Pos.	Plug connector - Solder pin angled			
	180 pF	370 pF	830 pF	1300 pF
9	241 A 21000 X	241 A 21040 X	241 A 21080 X	241 A 21120 X
15	241 A 21010 X	241 A 21050 X	241 A 21090 X	241 A 21130 X
25	241 A 21020 X	241 A 21060 X	241 A 21100 X	241 A 21140 X
37	241 A 21030 X	241 A 21070 X	241 A 21110 X	241 A 21150 X



REG.-Nr. 4000441



File #: E202784



File #: LR115000