
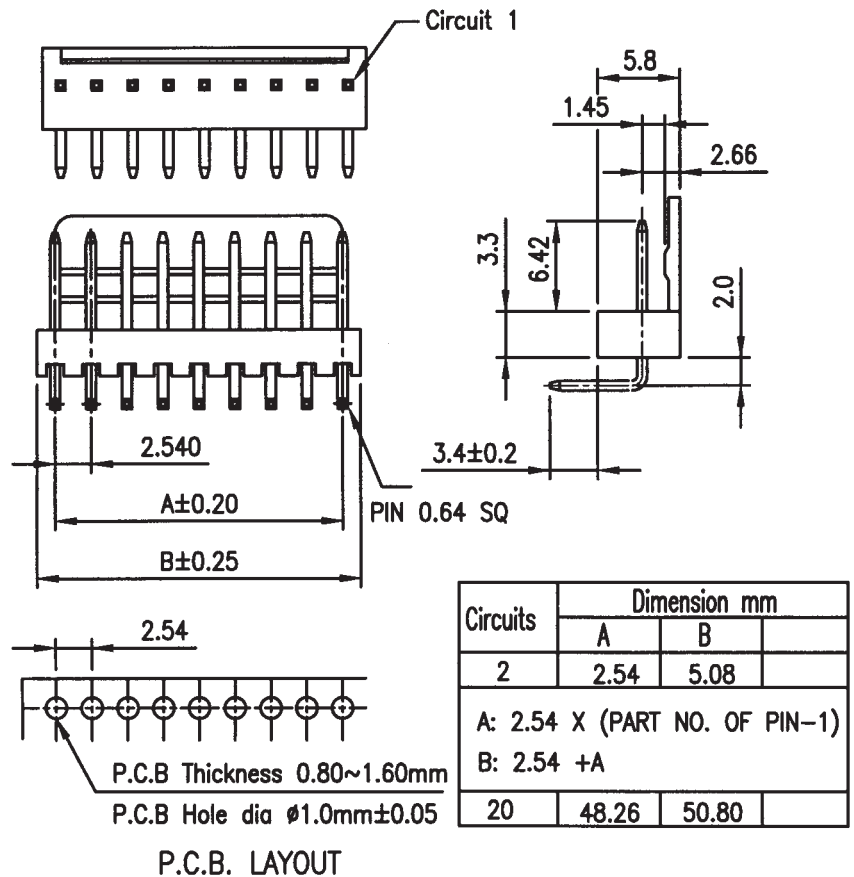


## 2.54mm Pitch Reverse Right Angle PCB Mount Header 2542RR-xx-T Series

Reversed Right Angle PCB Mount Trough Hole Type  
Brass Contacts - Tin Plated as Standard  
Mates with AM254T-xx-H Crimp Housings

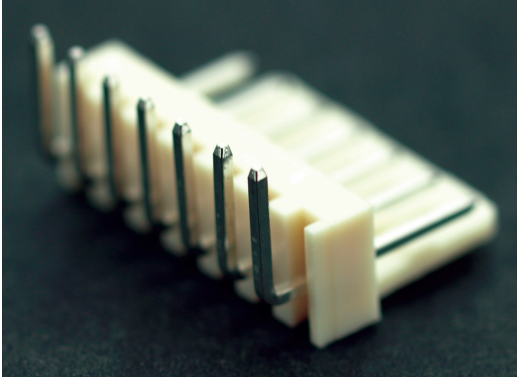

### Ordering Information for 2542RR-xx-T Series

**2542RR-xx-T**

**1**

Option 1      xx = Total number of positions 02 to 14

*Please note: Some sizes are non-standard, non-returnable and may be subject to minimum order quantities (MOQ)*

### Specification for 2542RR-xx-T Series

Material:	Tin Plated Brass
Rated Current:	3A - DWV - AC250V
Insulation Resistance:	1000 MΩ Min.
Withstanding Resistance:	1000V AC/Minute
Operating Temperature:	-25°C to +85°C
Soldering Time:	3±0.5 seconds
Solder Temperature:	235°C±5°C
	Min. 95% of immersed area
Resistance to Solder Heat:	Time 5±0.5 seconds
	@ temp 235°C±5°C Max.
Mates with:	Valcon AM254-xxH Series Housings