



## Data Sheet | Item Number: 267-412

Conductor support, base; without ground contact; with snap-in mounting feet; 7-pole; 2,50 mm<sup>2</sup>; white

<https://www.wago.com/267-412>

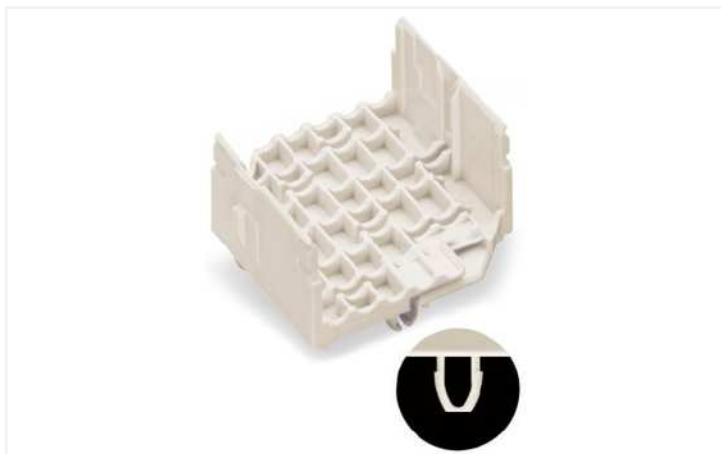

Color: white

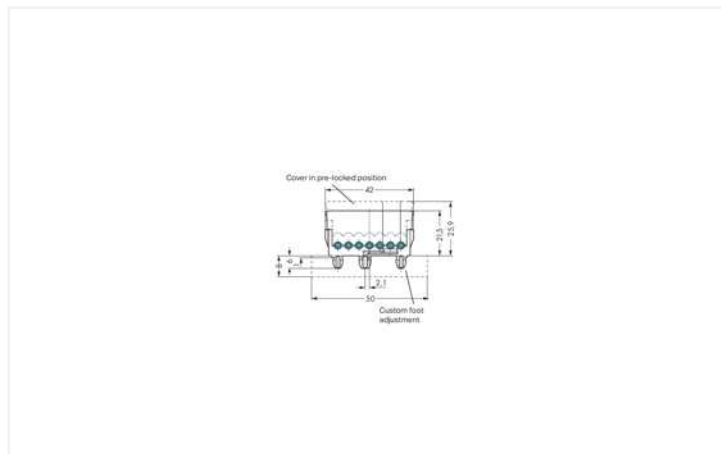

Dimensions in mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

### Electrical data

#### Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	500 V
Rated impulse voltage (III/2)	4 kV
Rated current	6 A
Legend (ratings)	(III / 2) $\Delta$ Overvoltage category III / Pollution degree 2

### Connection data

Number of connection types	1
Number of levels	1

#### Connection 1

Connection technology	IDC connection
Solid conductor	1.5 ... 2.5 mm <sup>2</sup>

### Physical data

Width	40 mm / 1.575 inches
Height from the surface	21.5 mm / 0.846 inches
Depth	42 mm / 1.654 inches

## Material Data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>cu</sub> )
Contact plating	Tin
Fire load	0.143 MJ
Weight	4.9 g

## Environmental requirements

Temperature stability	105 °C
-----------------------	--------

## Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	CN
GTIN	4050821830290
Customs tariff number	39269097900

## Approvals / Certificates

### General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61984	40032309

## Downloads

### Environmental Product Compliance

Compliance Search

Environmental Product  
Compliance 267-412



Documentation

Additional Information

Technical Section

03.04.2019

pdf

1949.09 KB



CAD/CAE-Data

CAD data

2D/3D Models 267-412



CAE data

EPLAN Data Portal  
267-412



ZUKEN Portal 267-412

