


Data Sheet | Item Number: 267-437


Conductor support, cover; with direct ground contact; 7-pole; 2,50 mm²; white



<https://www.wago.com/267-437>

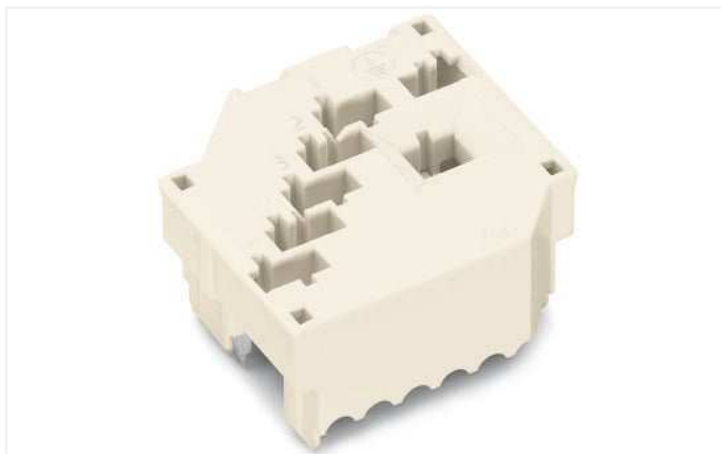

Color: white

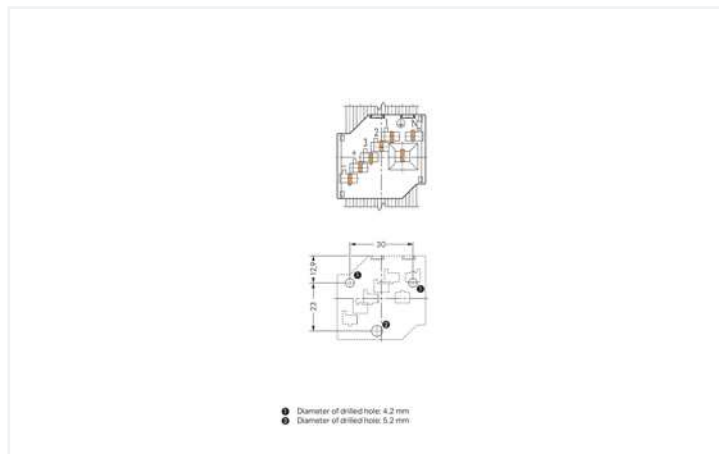

Dimensions in mm

- 1) Diameter of drilled hole: 4.2 mm
- 2) Diameter of drilled hole: 5.2 mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Legend (ratings)	(III / 2) Δ Overvoltage category III / Pollution degree 2

Connection data

Total number of potentials	7
Number of connection types	1

Connection 1

Pole number	7
-------------	---

Material Data

Note (material data)

[Information on material specifications can be found here](#)

Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.258 MJ
Weight	11.3 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918997836
Customs tariff number	85369010000

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product
Compliance 267-437



Documentation

Additional Information

Technical Section	03.04.2019	pdf 1949.09 KB	
-------------------	------------	-------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 267-437



CAE data

ZUKEN Portal 267-437

