

Watertight Devices  
20A, 3 Phase 480V AC, 3 Pole, 4 Wire  
Twist-Lock® Plugs

# HUBBELL

## Features

- UV resistant thermoplastic elastomer body with easy grip ribs
- Impact resistant PBT non metallic components
- Stainless steel assembly screws

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Yellow plug	.560"-.775" (14.2-19.9)	783585184210	26W76H



## Listings

Listed to UL498  
Certified to CSA C22.2 No. 42  
Meets NEMA WD-1, WD-6 and ANSI standards

## Specifications

Housing	TPE
Terminal Retainer	Clear polycarbonate
Blades	Nickel plated brass
Terminal Screws	Steel, chromate
Strain Relief Nut	PBT
Assembly Screws	Stainless Steel

## Performance

### Electrical


Current Interrupting Rated for current interruption per UL498  
Dielectric Voltage 3500V AC

### Mechanical

Terminal Accommodations 14 AWG to 10 AWG

### Environmental

Moisture Resistance NEMA 4, 4X, 12, 6, 6P  
Operating temperatures -40°C (without impact) to +60°C continuous  
UV resistance All exposed materials are UV stabilized

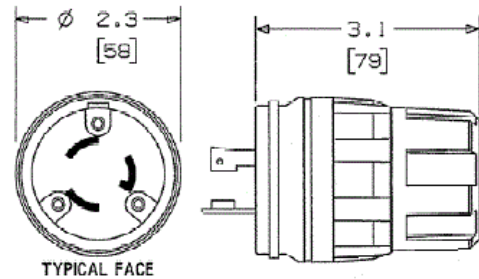

## Resources

Customer Use Drawing  
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

