

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company



- **Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases.** Also formulated for sunlight resistance. Other Heyco products are available in this material—please consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge (Except HFP-187 glossy finish).
- Lock firmly into panel up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.
- Multiple sizes for use in .187" (4,7 mm) to 2.000" (50,8 mm) diameter holes. Consult Heyco for larger sizes.

## Heyco® Halogen and Phosphorus-Free 94V-0 Hole Plugs

Heat Stabilized • Self Extinguishing • Nontoxic • UV Resistant


Mounting Hole Diameter Range: .187" (4,7 mm) to 2.000" (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.
Single Locking Step for Panel Thickness up to .062" (1,6 mm)							
.187	4,7	<b>2593</b>	HFP 187*	.25	6,4	.24	6,1
.250	6,4	<b>2606</b>	HFP 250	.31	7,9		
.312	7,9	<b>2616</b>	HFP 312	.38	9,5	.31	7,9


Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)							
.375	9,5	<b>2623</b>	HFP 375	.47	11,9		
.437	11,1	<b>2636</b>	HFP 437	.53	13,5		
.500	12,7	<b>2646</b>	HFP 500	.58	14,7	.41	10,3
.625	15,9	<b>2666</b>	HFP 625	.72	18,2		
.750	19,1	<b>2686</b>	HFP 750	.92	23,4		
.875	22,2	<b>2706</b>	HFP 875	1.02	25,8		
1.000	25,4	<b>2716</b>	HFP 1000	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	<b>2729</b>	HFP 1093	1.22	30,9		
1.250	31,7	<b>2749</b>	HFP 1250	1.38	34,9	.45	11,5
1.375	34,9	<b>2759</b>	HFP 1375	1.50	38,1		
1.500	38,1	<b>2769</b>	HFP 1500	1.69	42,8		
1.750	44,5	<b>2779</b>	HFP 1750	1.92	48,7		
2.000	50,8	<b>2789</b>	HFP 2000	2.17	55,1	.47	11,9

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm) <span style="float: right; background-color: yellow; border: 1px solid black; padding: 2px;">ALL NEW PRODUCTS</span>							
.500	12,7	<b>3004F</b>	HFPT 500	.58	14,7	.56	14,3
.625	15,9	<b>3006F</b>	HFPT 625 *	.73	18,5	.52	13,2
.750	19,1	<b>3008F</b>	HFPT 750 *	.91	23,1		
.875	22,2	<b>3044F</b>	HFPT 875	1.02	25,8		
1.000	25,4	<b>3046F</b>	HFPT 1000	1.20	30,6		
1.093- 1.125	27,8- 28,6	<b>3018F</b>	HFPT 1093	1.22	30,9	.56	14,3
1.250	31,7	<b>3102F</b>	HFPT 1250	1.38	34,9		
1.375	34,9	<b>3106F</b>	HFPT 1375	1.50	38,1		
1.500	38,1	<b>3048F</b>	HFPT 1500	1.67	42,4		
1.750	44,5	<b>3027F</b>	HFPT 1750	1.91	48,4		
2.000	50,8	<b>3050F</b>	HFPT 2000	2.17	55,1	.58	14,7

Standard color black.  
\*Convex, glossy finish head.

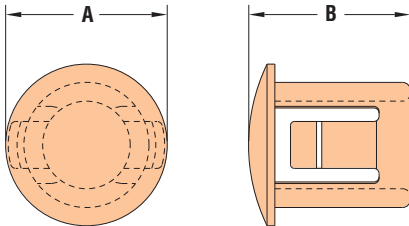

SINGLE PANEL THICKNESS DESIGN

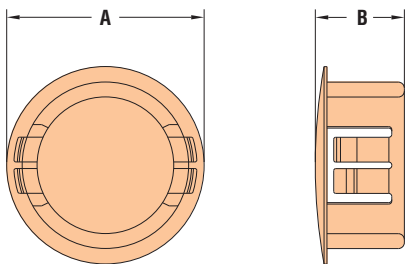

MULTIPLE PANEL THICKNESS DESIGN

*Quick  
Specs*

Material  
Certifications

Nylon 6/6  
 Recognized under the Component Program of Underwriters' Laboratories File E51579

Flammability Rating  
Temperature Range

Certified by the Canadian Standards Association File 8919  
 94V-0  
 -40°F (-40°C) to 221°F (105°C)