


<https://www.wago.com/280-801/281-418>



Color: ■ gray

Similar to illustration

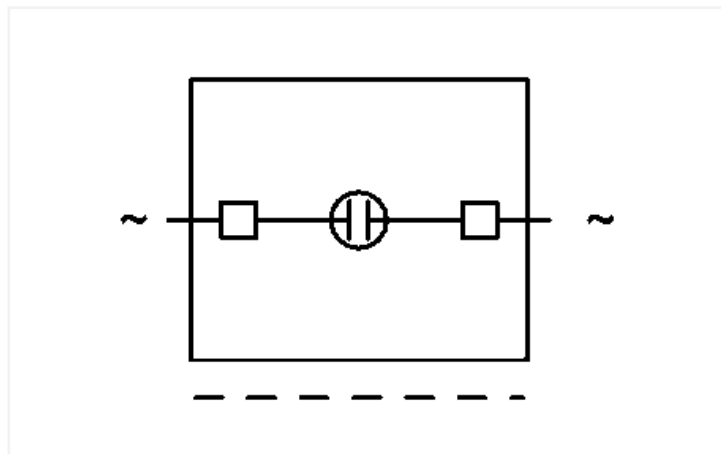

280-801/281-418

Electrical data

Ratings per IEC/EN

| | |
|----------------------------|---------|
| Operation status indicator | 120 VAC |
|----------------------------|---------|

Physical data

| | |
|-------|---------------------|
| Width | 5 mm / 0.197 inches |
|-------|---------------------|

Material Data

Note (material data)

[Information on material specifications can be found here](#)

| | |
|-----------------------------|------------------|
| Color | gray |
| Material group | I |
| Insulation material | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Fire load | 0.105 MJ |
| Weight | 2.6 g |

Environmental requirements

| | |
|----------------------------------|-----------------|
| Processing temperature | -35 ... +85 °C |
| Continuous operating temperature | -60 ... +105 °C |

Commercial data

| | |
|-----------------------|----------------------------------|
| Product Group | 1 (Rail Mounted Terminal Blocks) |
| eCl@ss 10.0 | 27-14-11-49 |
| eCl@ss 9.0 | 27-14-11-49 |
| ETIM 8.0 | EC002018 |
| ETIM 7.0 | EC002018 |
| PU (SPU) | 100 pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4045454195618 |
| Customs tariff number | 85366990990 |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
280-801/281-418



Documentation

Additional Information

Technical Section

pdf
2142.18 KB



Bid Text

280-801/281-418

19.02.2019

xml
2.67 KB



280-801/281-418

27.04.2017

doc
23.50 KB



CAD/CAE-Data

CAD data

2D/3D Models
280-801/281-418



CAE data

WSCAD Universe
280-801/281-418



ZUKEN Portal
280-801/281-418

