

## Single relay - REL-OR- 24DC/2X21 - 2834232

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pluggable octal relay with power contacts, 2 PDT, test button, mechanical switching position indication, coil voltage 24 V DC

### Product Features

- With detectable manual operation
- Extremely rugged design
- Mechanical switch position indicator



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 10 pc    |
| Weight per Piece (excluding packing) | 108.0 g  |
| Custom tariff number                 | 85364190 |
| Country of origin                    | China    |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 34.5 mm |
| Height | 34.5 mm |
| Depth  | 52.5 mm |

#### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -40 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 60 °C |

#### Coil side

|   |             |
|---|-------------|
| Nominal input voltage $U_N$               | 24 V DC     |
| Input voltage range in reference to $U_N$ | 0.8 ... 1.1 |

# Single relay - REL-OR- 24DC/2X21 - 2834232

## Technical data

### Coil side

|   |                                    |
|---|------------------------------------|
| Typical input current at $U_N$          | 56 mA                              |
| Typical response time                   | 12 ms                              |
| Typical release time                    | 6 ms                               |
| Coil resistance                         | 430 $\Omega$ $\pm$ 15 % (at 20 °C) |
| Power dissipation for nominal condition | 1.34 W                             |

### Contact side

|                                       |                        |
|---------------------------------------|------------------------|
| Contact type                          | 2 PDT                  |
| Contact material                      | AgSnIn                 |
| Maximum switching voltage             | 250 V AC/DC            |
| Minimum switching voltage             | 1 V                    |
| Min. switching current                | 10 mA                  |
| Maximum inrush current                | on request             |
| Limiting continuous current           | 10 A (N/O contact)     |
|                                       | 5 A (N/C contact)      |
| Interrupting rating (ohmic load) max. | 2500 VA (for 250 V AC) |

### Connection data input side

|                   |                 |
|-------------------|-----------------|
| Connection name   | Coil side       |
| Connection method | Plug connection |

### Connection data output side

|                   |                 |
|-------------------|-----------------|
| Connection name   | Contact side    |
| Connection method | Plug connection |

### General

|  |                             |
|--|-----------------------------|
| Test voltage relay winding/relay contact | 2.5 kV AC (50 Hz, 1 min.)   |
| Test voltage relay contact/relay contact | 2.5 kV AC (50 Hz, 1 min.)   |
| Operating mode                           | 100% operating factor       |
| Mechanical service life                  | 10 x 10 <sup>6</sup> cycles |
| Standards/regulations                    | IEC 60664                   |
| Degree of pollution                      | 3                           |
| Overvoltage category                     | II                          |
| Mounting position                        | any                         |
| Assembly instructions                    | On relay base PR3           |

### Standards and Regulations

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | CUL       |
| Standards/regulations            | IEC 60664 |
| Degree of pollution              | 3         |

# Single relay - REL-OR- 24DC/2X21 - 2834232

## Technical data

### Standards and Regulations

|                      |    |
|----------------------|----|
| Overvoltage category | II |
|----------------------|----|

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27371104 |
| eCl@ss 4.1 | 27371104 |
| eCl@ss 5.0 | 27371001 |
| eCl@ss 5.1 | 27371001 |
| eCl@ss 6.0 | 27371001 |
| eCl@ss 7.0 | 27371001 |
| eCl@ss 8.0 | 27371601 |
| eCl@ss 9.0 | 27371601 |

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000196 |
| ETIM 3.0 | EC000196 |
| ETIM 4.0 | EC000196 |
| ETIM 5.0 | EC001437 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211916 |
| UNSPSC 7.0901 | 39121515 |
| UNSPSC 11     | 39121515 |
| UNSPSC 12.01  | 39121515 |
| UNSPSC 13.2   | 39121515 |

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

---

#### Ex Approvals

---

# Single relay - REL-OR- 24DC/2X21 - 2834232

## Approvals

Approvals submitted

### Approval details

UL Recognized

cUL Recognized


EAC

EAC

cULus Recognized


## Drawings

Diagram

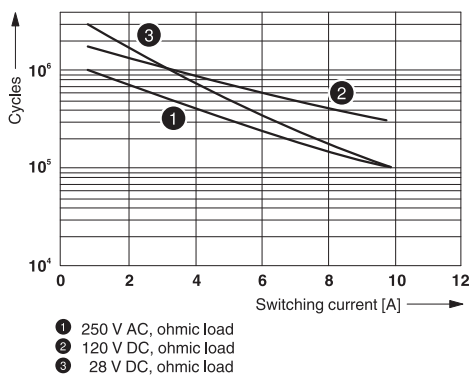

Electrical service life


Diagram

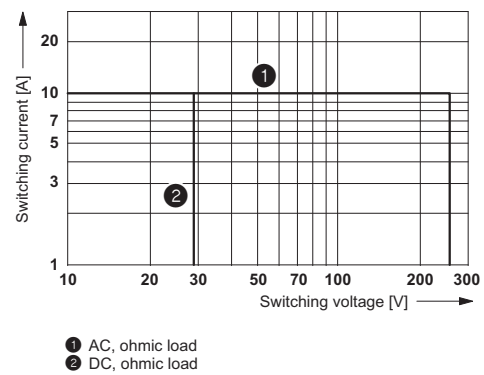


Interrupting rating

# Single relay - REL-OR- 24DC/2X21 - 2834232

Diagram

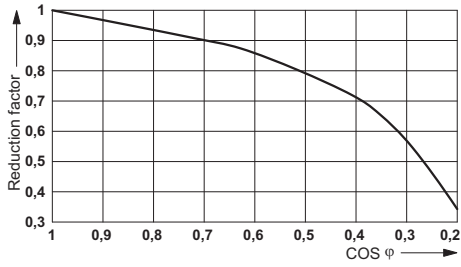

Circuit diagram



Service life reduction factor with various cos phi