

## Electronics enclosure - ME MAX 22,5 F G 3-3 KMGY - 2869388

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Complete housing without vents, Cross connection: DIN rail bus connector, Color: light gray, Width: 22.5 mm, Constructional height: 92 mm, Number of positions cross connector: 5


The illustration shows the housing versions

### Product Features

- Item is from the ME-MAX product range
- Easy mounting
- Available in overall widths from 6.2 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional with bus connector for DIN rail mounting as well as power connection system



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 017918 975111
Weight per Piece (excluding packing)	44.43 g
Custom tariff number	85472000
Country of origin	Germany

### Technical data

#### General

Housing type	Complete housing
Housing material	Polyamide

# Electronics enclosure - ME MAX 22,5 F G 3-3 KMGY - 2869388

## Technical data

### General

Color	light gray
-------	------------

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
---------------------------------	--

### Dimensions

Length	85 mm
Constructional height	92 mm
Width	22.5 mm

### Technical data

Connection in acc. with standard	CUL
Indicator1	CUL1
Flammability rating according to UL 94	V0
Power dissipation without gap	5.5 W
Power dissipation with 20 mm gap	9.6 W
Number of positions	24

## Classifications

### eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702

### ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501

# Electronics enclosure - ME MAX 22,5 F G 3-3 KMGY - 2869388

## Classifications

### UNSPSC

UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---


#### Ex Approvals


---


#### Approvals submitted

---

## Approval details

UL Recognized 


cUL Recognized 

cULus Recognized 


## Drawings

# Electronics enclosure - ME MAX 22,5 F G 3-3 KMGY - 2869388

Dimensional drawing

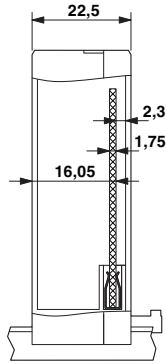


Dimensional drawing

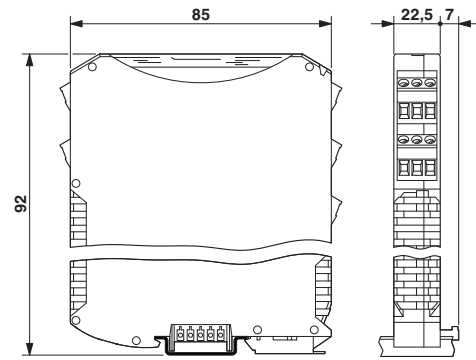


Housing inner dimensions ME MAX... Flat/extra-flat

Dimensional drawing

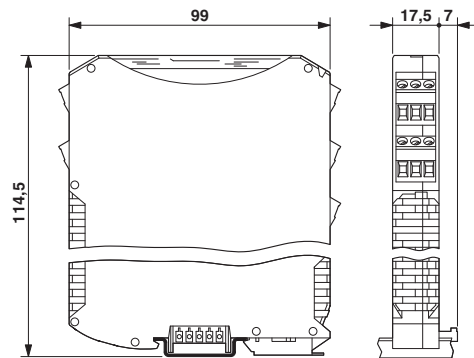

# Electronics enclosure - ME MAX 22,5 F G 3-3 KMGY - 2869388


Dimensional drawing

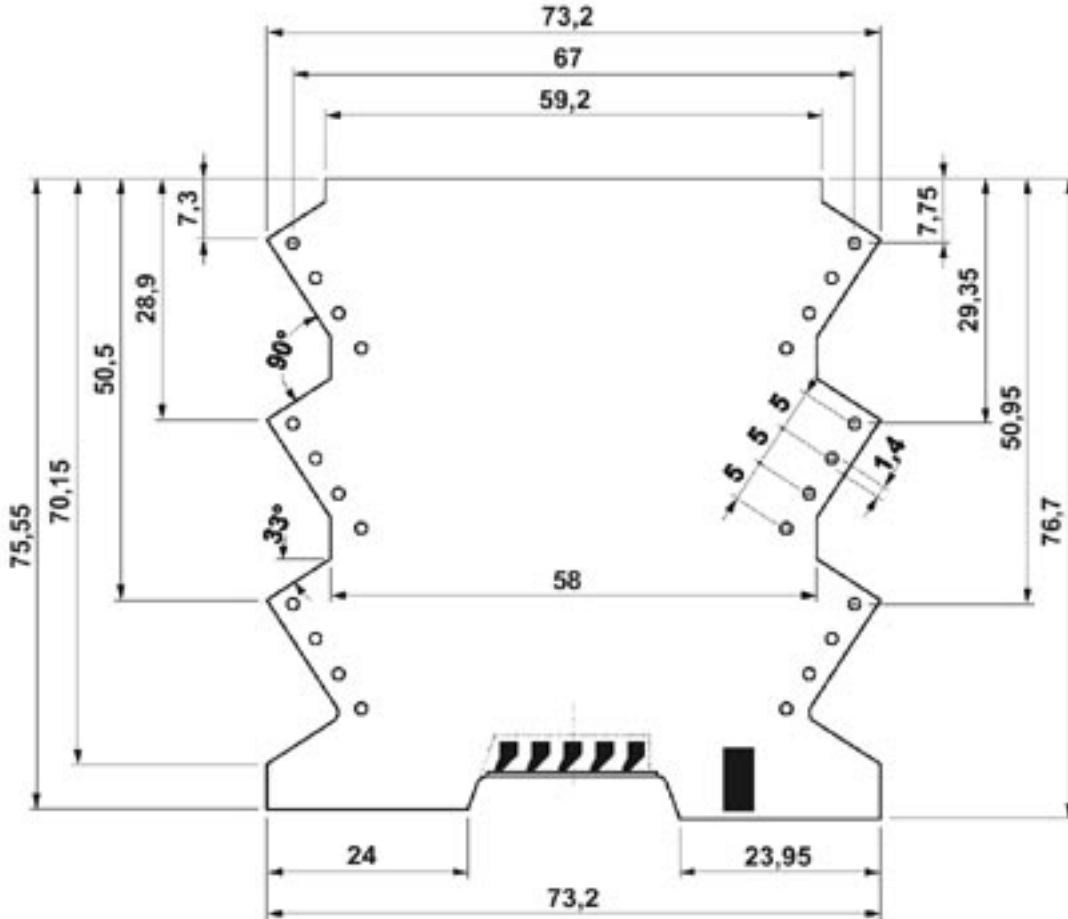

Dimensional drawing of the ME MAX ...F 3-3 PCB for PCB terminal block connection (MKDSO), view: Component side

# Electronics enclosure - ME MAX 22,5 F G 3-3 KMGY - 2869388

Dimensional drawing

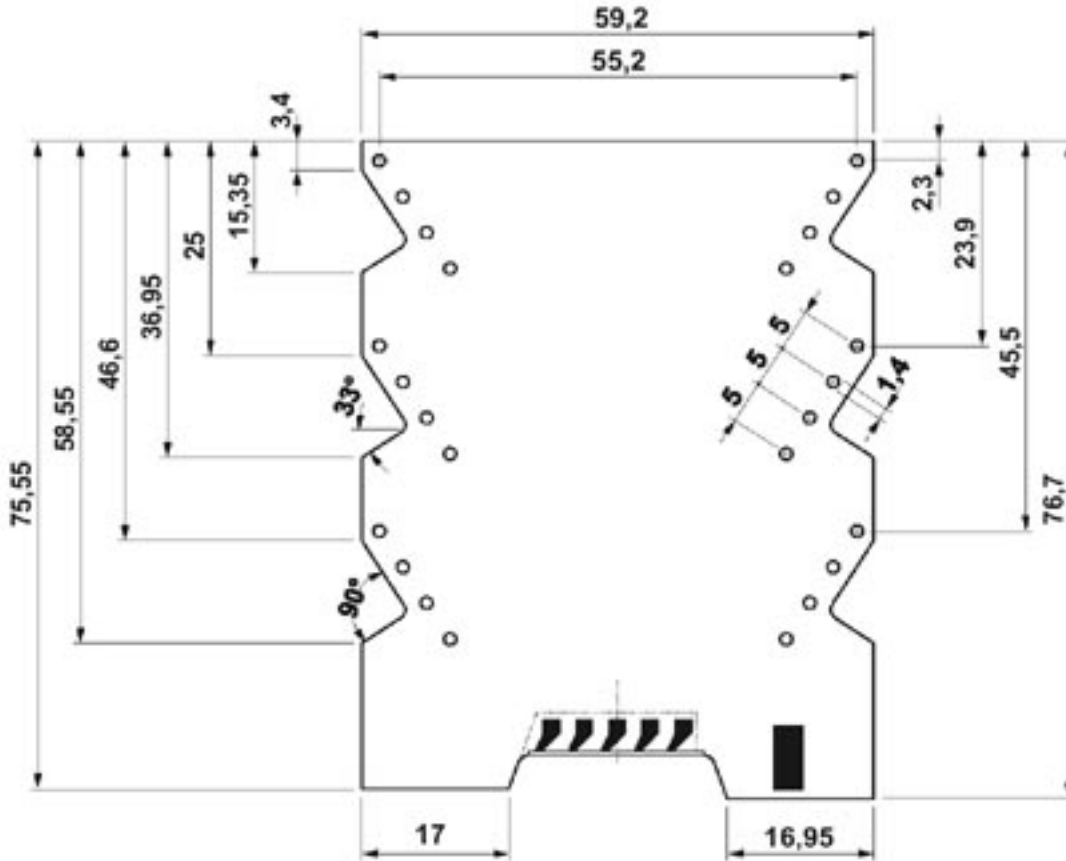

Dimensional drawing of the ME MAX ...SF 3-3 PCB for plug connection system (MSTBO), view: Component side